


**John Deere  
JD302  
Tractor and Loader**

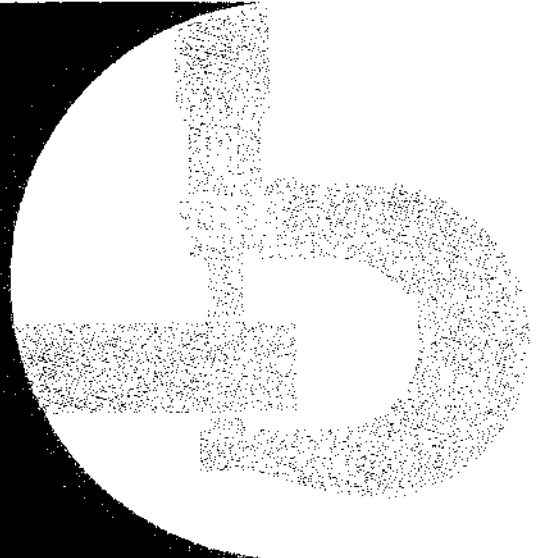

**TECHNICAL MANUAL**

**TM-1089**

Litho in U.S.A.



# JD302 TRACTOR AND LOADER

Technical Manual  
TM-1089 (Dec-78)

## CONTENTS


- |   |   |
|---|---|
| Section 10 - GENERAL                                    | Section 50 - HYDRAULIC SYSTEM               |
| Group 5 Specifications                                  | Group 5 Transmission Pump                   |
| Group 10 Predelivery, Delivery, and After-Sale Services | Group 10 Main Hydraulic Pump                |
| Group 15 Lubrication                                    | Group 15 Reverser Clutch Control Valve      |
| Section 20 - ENGINE                                     | Group 20 Independent PTO Control Valve      |
| Group 5 Engine Removal and Installation                 | Group 25 Pressure Control Valve             |
| Group 10 Basic Engine                                   | Group 30 Power Steering Valve               |
| Group 15 Engine Lubrication System                      | Group 35 Manual Steering                    |
| Group 20 Engine Cooling System                          | Group 40 Brake Valve                        |
| Group 25 Fuel System                                    | Group 45 Loader Control Valve               |
| Group 30 Speed Control Linkage                          | Group 50 Selective Control Valve            |
| Group 35 Air Intake System                              | Group 55 Rockshaft System                   |
| Group 40 Specifications and Special Tools               | Group 60 Miscellaneous Hydraulic Components |
| Section 30 - ELECTRICAL SYSTEM                          | Group 65 Hydraulic Cylinders                |
| Group 5 Batteries                                       | Group 70 Specifications and Special Tools   |
| Group 10 Charging System                                | Section 60 - MISCELLANEOUS COMPONENTS       |
| Group 15 Starting System                                | Group 5 Manual Steering                     |
| Group 20 Ignition System                                | Group 10 Front End Assembly                 |
| Group 25 Gauges and Switches                            | Group 15 Loader Frame, Boom and Bucket      |
| Group 30 Specifications and Special Tools               | Group 20 Three-Point Hitch                  |
| Section 40 - POWER TRAIN                                | Group 25 Specifications and Special Tools   |
| Group 5 Clutch Assemblies                               | Section 70 - SYSTEM TESTING                 |
| Group 10 Transmission                                   | Group 5 General Information                 |
| Group 15 Reverser                                       | Group 10 Engine                             |
| Group 20 PTO Systems                                    | Group 15 Electrical System                  |
| Group 25 Differential and Parking Brake                 | Group 20 Power Train                        |
| Group 30 Final Drives                                   | Group 25 Hydraulic System                   |
| Group 35 Specifications and Special Tools               | Group 26 Hydraulic System (Analyzer)        |
|   | Group 30 Miscellaneous Components           |
|   | Group 35 Specifications and Special Tools   |

## INDEX

*The specifications and design information contained in this manual were correct at the time it was printed. It is John Deere's policy to continually improve and update our machines. Therefore, the specifications and design information are subject to change without notice. Wherever applicable, specifications and design information are in accordance with SAE and ICED standards.*

Copyright 1973  
DEERE & COMPANY  
Moline, Illinois  
All rights reserved

## INTRODUCTION

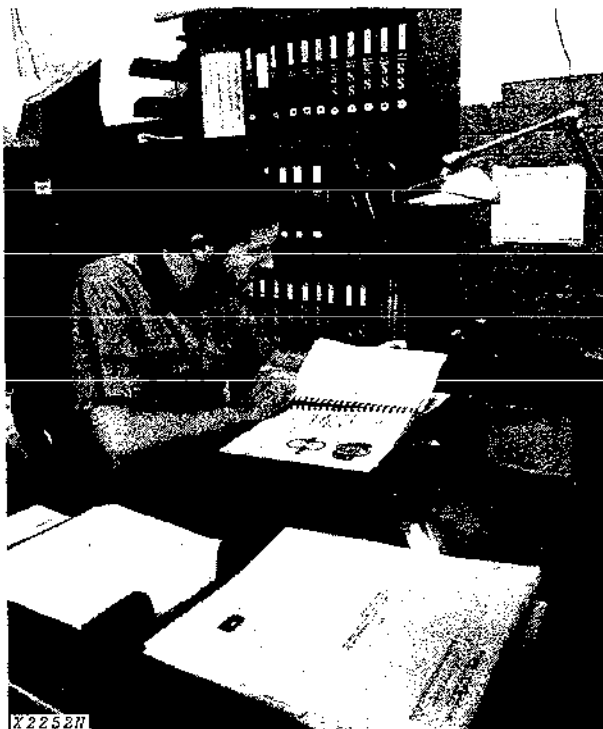

Use FOS Manuals for Reference

This technical manual is part of a twin concept of service:

The two kinds of manuals work as a team to give you both the general background and technical details of shop service.

### • FOS Manuals—for reference

*Fundamentals of Service (FOS) Manuals* cover basic theory of operation, *fundamentals* of trouble shooting, *general* maintenance, and *basic* types of failures and their causes. FOS Manuals are for training new personnel and for reference by experienced technicians.



When service personnel should refer to a FOS Manual for more information, a FOS symbol like the one at the left is used in the TM to identify the reference.

### • Technical Manuals—for actual service

*Technical manuals* are concise service guides for a *specific* machine. Technical manuals are on-the-job guides containing only the vital information needed by an experienced service technician.



Use Technical Manuals for Actual Service

This technical manual was planned and written for you—an experienced service technician. Keep it in a permanent binder in the shop where it is handy. Refer to it whenever in doubt about correct service procedures or specifications.

Some features of this manual:

- Inside front cover - "Table of Contents" and "Maintenance Without Accident"
- Section 10 - General specifications and services.
- Sections 20 through 60 - Removal, repair, testing (components removed), installation, and adjustment.
- Section 70 - Detailed explanation of system operation, diagnosis, visual inspection, testing, and adjustments.
- Specifications grouped and illustrated at the end of each section.
- Inside rear cover - Index.

**Thanks very much for your reading,  
Want to get more information,  
Please click here, Then get the complete  
manual**

**JustClickHere** 

**NOTE:**


**If there is no response to click on the link above,  
please download the PDF document first, and then  
click on it.**

**Have any questions please write to me:  
[admin@servicemanualperfect.com](mailto:admin@servicemanualperfect.com)**


## MAINTENANCE WITHOUT ACCIDENT WORK SAFELY



T27399N

 This safety alert symbol identifies important safety messages in this manual and on the tractor. When you see this symbol, be alert to the possibility of personal injury and carefully read the message that follows.

### EVERY EMPLOYER HAS A SAFETY PROGRAM. KNOW WHAT IT IS!

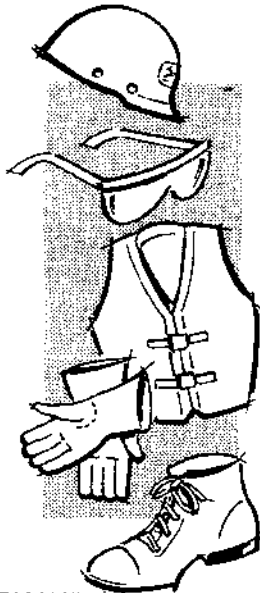

T27501N

Consult your shop foreman for specific instructions on a job, and the safety equipment required.


For instance, you may need: Hard hat, safety shoes, safety goggles, heavy gloves, reflector vests, ear protectors, respirators.



T27502N

### BE ALERT!

Plan ahead—work safely—know how to use a first-aid kit and a fire extinguisher—and where to get aid and assistance.



T27504N

### Maintenance Area

Make sure the maintenance area is adequately vented.


Keep maintenance area CLEAN AND DRY. Oily and wet floors are slippery; greasy rags are a fire hazard; wet spots are dangerous when working with electrical equipment.

Store starting aids in a cool and well-ventilated place, out of the reach of unauthorized personnel.

## MAINTENANCE WITHOUT ACCIDENT

### AVOID FIRE HAZARDS—

#### Fuel Is Dangerous!

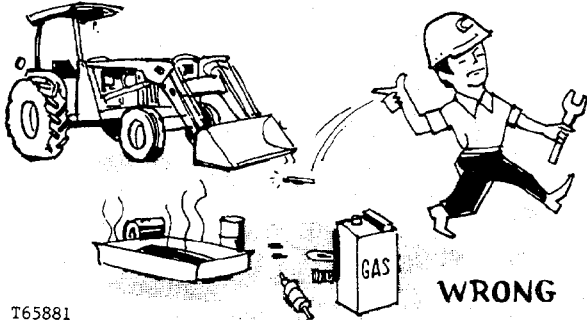

T65881

Don't smoke while refueling.

Don't smoke while handling highly flammable material.

Engine should be shut off when refueling.

Use care in refueling if the engine is hot.

Don't use open pans of gasoline or diesel fuel for cleaning parts. Good commercial, nonflammable solvents are preferred.

#### Battery Gas Is Highly Flammable!

Provide adequate ventilation when charging batteries.



T27508N

Don't check battery charge by placing metal objects across the posts.

Don't allow sparks or open flame near batteries.

Don't smoke near battery.

#### Flame Is Not a Flashlight!

**NEVER USE OPEN FLAME AROUND THE MACHINE.**

**KNOW WHERE FIRE EXTINGUISHERS ARE KEPT!**

### UNDER ALL MAINTENANCE CONDITIONS—


Do not perform any work on the equipment unless authorized to do so. Then be sure you know the safe and proper procedure.

Follow recommended procedures.

Never service the equipment while it is being operated.

Avoid working on equipment with the engine running.

#### RIGHT

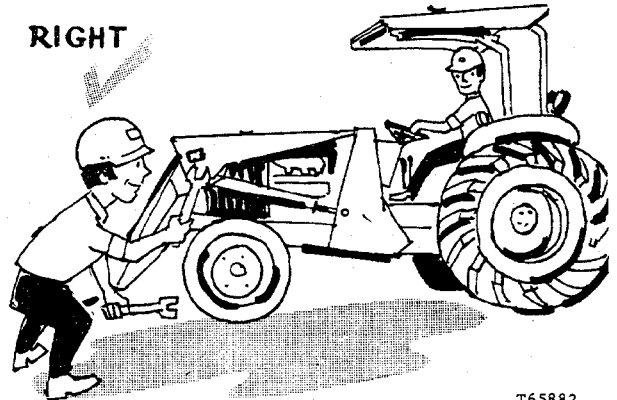

T65882

If it is necessary to make checks with the engine running, **ALWAYS USE TWO** service technicians—one, the operator, at the controls, the other checking within sight of the operator.

#### KEEP HANDS AWAY FROM MOVING PARTS

Support all raised equipment.

Never work under raised bucket.

Lower bucket to ground.

If the machine is on an incline, block it securely.


Use hoisting equipment for lifting heavy parts.

#### TAKE CARE! WATCH OUT FOR OTHER PEOPLE IN THE VICINITY

Wear safety glasses when drilling, grinding, or hammering metal.

## SERVICING PRECAUTIONS

RIGHT

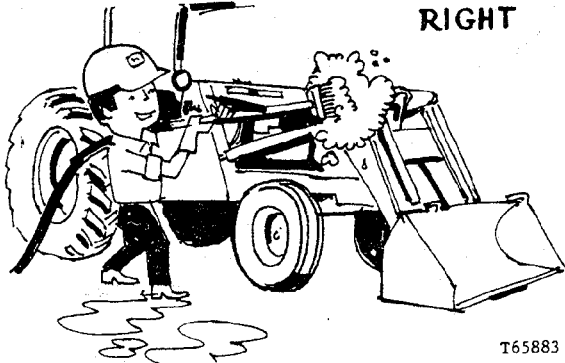

T65883

Keep ALL equipment free of dirt and oil.

Be sure to clean any oil, grease, mud, ice, or snow from floor of operator's compartment and stepping points.

When preparing the engine for storage, remember that inhibitor is volatile and therefore dangerous. Seal and tape openings after adding the inhibitor. Keep container tightly closed when not in use.

Don't remove the radiator cap until coolant temperature is below the boiling point. Then loosen cap slowly to the stop to relieve pressure before removing.

Periodically check exhaust system for excessive leakage.

Relieve hydraulic pressure before working on hydraulic system: shut off engine, lower bucket to ground, and move control levers and steering wheel until no response is felt.

When checking hydraulic pressure, be sure to use the correct test gauge.

## PRECAUTIONS DURING REPAIR

Before working on hydraulic system relieve hydraulic pressure.

Before repairing the electrical system, or performing a major overhaul, disconnect batteries.


### KNOW EQUIPMENT IS READY!

Check guards, canopies, safety guards — all protective devices installed on the unit. Every one should be in place and secure.

### CHECK IT OUT!

- GUARDS
- CANOPIES
- SHIELDS
- PROTECTIVE DEVICES
- ROLL-OVER PROTECTIVE STRUCTURES
- SEAT BELTS, ETC.

RIGHT

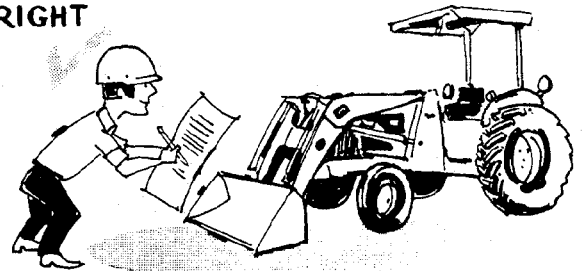

T65884

Carefully inspect equipment for visual defects—leaks in fuel, lubrication, and hydraulic systems. Do not search for pressurized fluid leaks with your hands. Use cardboard or wood to search for leaks.





**COMPLETE PAGE LISTING  
 WITH LATEST DATE LINES**

1,2	(Dec-78)	20-30-1,2	(Nov-73)	40-5-5,6	(Dec-78)
3,4	(Dec-78)	20-35-1,2	(Aug-79)	40-5-7,8	(Dec-78)
5,6	(Dec-78)	20-40-1,2	(Aug-79)	40-5-9,10	(Dec-78)
7,8	(Aug-79)	20-40-3,4	(Aug-79)	40-5-11,12	(Aug-79)
		20-40-5,6	(Aug-79)	40-5-13,14	(Nov-73)
10-5-1,2	(Aug-79)	20-40-7,8	(Aug-79)	40-10-1,2	(Dec-78)
10-5-3,4	(Dec-78)	20-40-9,10	(Aug-79)	40-10-3,4	(Nov-73)
10-10-1,2	(Aug-79)	20-40-11,12	(Aug-79)	40-10-5,6	(Nov-73)
10-10-3,4	(Aug-79)	20-40-13,14	(Aug-79)	40-10-7,8	(Dec-78)
10-10-5,6	(Aug-79)	20-40-15,16	(Aug-79)	40-10-9,10	(Dec-78)
10-10-7,8	(Aug-79)	20-40-17,18	(Aug-79)	40-15-1,2	(Nov-73)
10-10-9,10	(Aug-79)	20-40-19,20	(Aug-79)	40-15-3,4	(Dec-78)
10-10-11,12	(Aug-79)	20-40-21,22	(Aug-79)	40-15-5,6	(Aug-79)
10-10-13,14	(Aug-79)	20-40-23,24	(Aug-79)	40-20-1,2	(Nov-73)
10-10-15,16	(Aug-79)	20-40-25,26	(Aug-79)	40-20-3,4	(Aug-74)
10-10-17,18	(Aug-79)			40-20-5,6	(Nov-73)
10-10-19,20	(Aug-79)	30-5-1,2	(May-77)	40-20-7,8	(Aug-79)
10-10-21,22	(Aug-79)	30-5-3,4	(Dec-78)	40-25-1,2	(Dec-78)
10-10-23,24	(Aug-79)	30-5-5,6	(Dec-78)	40-25-3,4	(Dec-78)
10-10-25,26	(Aug-79)	30-10-1,2	(Nov-73)	40-25-5,6	(Dec-78)
10-10-27,28	(Aug-79)	30-10-3,4	(Nov-73)	40-30-1,2	(Dec-78)
10-10-29,30*	(Dec-78)	30-10-5,6	(Nov-73)	40-30-3,4	(Dec-78)
10-15-1,2	(Dec-78)	30-10-7,8	(Nov-73)	40-35-1,2	(Aug-79)
		30-10-9,10	(Nov-73)	40-35-3,4	(Aug-79)
20-5-1,2	(Aug-79)	30-10-11,12	(Nov-73)	40-35-5,6	(Nov-73)
20-5-3,4	(Aug-79)	30-15-1,2	(Nov-73)	40-35-7,8	(Dec-78)
20-10-1,2	(Aug-79)	30-15-3,4	(Dec-78)		
20-10-3,4	(Aug-79)	30-15-5,6	(Mar-74)	50-5-1,2	(Aug-79)
20-10-5,6	(Aug-79)	30-15-7,8	(Aug-74)	50-5-3,4	(Dec-78)
20-10-7,8	(Aug-79)	30-15-9,10	(Mar-74)	50-10-1,2	(Nov-73)
20-10-9,10	(Aug-79)	30-15-11,12	(Dec-78)	50-10-3,4	(Nov-73)
20-10-11,12	(Aug-79)	30-20-1,2	(Nov-73)	50-10-5,6	(Aug-74)
20-10-13,14	(Aug-79)	30-20-3,4	(Nov-73)	50-15-1,2	(Aug-79)
20-10-15,16	(Aug-79)	30-20-5,6	(Nov-73)	50-15-3,4	(Aug-79)
20-10-17,18	(Aug-79)	30-20-7,8	(Nov-73)	50-15-5,6	(Dec-78)
20-10-19,20	(Aug-79)	30-25-1,2	(Mar-75)	50-20-1,2	(Aug-79)
20-15-1,2	(Aug-79)	30-25-3,4	(Nov-73)	50-20-3,4	(Nov-73)
20-15-3,4	(Nov-73)	30-30-1,2	(Dec-78)	50-25-1,2	(May-77)
20-20-1,2	(May-77)	30-30-3,4	(Dec-78)	50-30-1,2	(Aug-79)
20-20-3,4	(Nov-73)	30-30-5,6	(Dec-78)	50-30-3,4	(Mar-75)
20-25-1,2	(May-77)	30-30-7,8	(Nov-73)	50-30-5,6	(May-77)
20-25-3,4	(Nov-73)	30-30-9,10	(Nov-73)	50-30-7,8	(Dec-78)
20-25-5,6	(Dec-78)	30-30-11,12	(Nov-73)	50-35-1,2	(Nov-73)
20-25-7,8	(Aug-74)	30-30-13,14	(Mar-75)	50-40-1,2	(Aug-79)
20-25-9,10	(Dec-78)			50-40-3,4	(Aug-79)
20-25-11,12	(May-77)	40-5-1,2	(Dec-78)	50-45-1,2	(May-77)
20-25-13,14	(Nov-73)	40-5-3,4	(Nov-73)	50-50-1,2	(Nov-73)

Vertical lines indicate pages included in this revision.  
 \*Remove this page from manual.

## PAGE LISTING—Continued

50-50-3,4	(Nov-73)	70-5-1,2	(Dec-78)	70-25-9,10	(Dec-78)
50-50-5,6	(Dec-78)	70-10-1,2	(Nov-73)	70-25-11,12	(Dec-78)
50-50-7,8	(May-77)	70-10-3,4	(Nov-73)	70-25-13,14	(Aug-79)
50-55-1,2	(Nov-73)	70-10-5,6	(Nov-73)	70-25-15,16	(Dec-78)
50-55-3,4	(Dec-78)	70-10-7,8	(Aug-79)	70-25-17,18	(Dec-78)
50-55-5,6	(Aug-79)	70-10-9,10	(Aug-79)	70-25-19,20	(Dec-78)
50-55-7,8	(Nov-73)	70-10-11,12	(Aug-79)	70-26-1,2	(Dec-78)
50-55-9,10	(May-77)	70-10-13,14	(Nov-73)	70-26-3,4	(Dec-78)
50-55-11,12	(Dec-78)	70-10-15,16	(Aug-79)	70-26-5,6	(Dec-78)
50-55-13,14	(May-77)	70-15-1,2	(Nov-73)	70-26-7,8	(Dec-78)
50-60-1,2	(Nov-73)	70-15-3,4	(Dec-78)	70-26-9,10	(Dec-78)
50-60-3,4	(Aug-79)	70-15-5,6	(Dec-78)	70-26-11,12	(Aug-79)
50-60-5,6	(Nov-73)	70-15-7,8	(Dec-78)	70-26-13,14	(Dec-78)
50-65-1,2	(Nov-73)	70-15-9,10	(Nov-73)	70-26-15,16	(Dec-78)
50-65-3,4	(Nov-73)	70-15-11,12	(Nov-73)	70-26-17,18	(Dec-78)
50-65-5,6	(Nov-73)	70-15-13,14	(Dec-78)	70-26-19,20	(Dec-78)
50-70-1,2	(Nov-73)	70-15-15,16	(Mar-75)	70-26-21,22	(Dec-78)
50-70-3,4	(Nov-73)	70-15-17,18	(Nov-73)	70-26-23,24	(Dec-78)
50-70-5,6	(Aug-74)	70-15-19,20	(Nov-73)	70-30-1,2	(Aug-79)
50-70-7,8	(Aug-79)	70-15-21,22	(Dec-78)	70-30-3,4	(Nov-73)
50-70-9,10	(Aug-79)	70-15-23,24	(Nov-73)	70-35-1,2	(Aug-79)
50-70-11,12	(Aug-79)	70-15-25,26	(Nov-73)	70-35-3,4	(Aug-79)
50-70-13,14	(Aug-79)	70-15-27,28	(Nov-73)	70-35-5,6	(Aug-79)
50-70-15,16	(Aug-79)	70-15-29,30	(Mar-75)	70-35-7,8	(Nov-73)
50-70-17,18	(Aug-79)	70-15-31,32	(Nov-73)	70-35-9,10	(Dec-78)
		70-20-1,2	(Dec-78)	70-35-11,12	(Aug-79)
60-5-1,2	(Jun-74)	70-20-3,4	(May-77)	70-35-13,14	(Aug-79)
60-5-3,4	(Nov-73)	70-20-5,6	(Nov-73)	70-35-15,16	(May-77)
60-5-5,6	(Nov-73)	70-20-7,8	(Nov-73)	70-35-17,18	(Aug-79)
60-10-1,2	(Nov-73)	70-20-9,10	(Aug-79)	70-35-19,20	(Dec-78)
60-10-3,4	(Nov-73)	70-20-11,12	(Aug-79)	70-35-21,22	(Aug-79)
60-10-5,6	(May-77)	70-20-13,14	(May-77)		
60-10-7,8	(Dec-78)	70-25-1,2	(Aug-79)	Index - 1,2	(Aug-79)
60-10-9,10	(Nov-73)	70-25-3,4	(Dec-78)	Index - 3,4	(Aug-79)
60-10-11,12	(Dec-78)	70-25-5,6	(Nov-73)	Index - 5,6*	(Dec-78)
60-15-1,2	(Nov-73)	70-25-7,8	(Nov-73)	Index - 7,8*	(Dec-78)
60-15-3,4	(Nov-73)				
60-20-1,2	(Nov-73)				
60-25-1,2	(Dec-78)				
60-25-3,4	(Dec-78)				
60-25-5,6	(Dec-78)				
60-25-7,8	(Dec-78)				

Vertical lines indicate pages included in this revision.  
\*Remove this page from manual.

# Section 10 GENERAL

## CONTENTS OF THIS SECTION

	Page		Page
GROUP 5 - SPECIFICATIONS		GROUP 15 - LUBRICATION	
General Machine Specifications .....	5-1	Oils and Greases .....	15-1
GROUP 10 - PREDELIVERY, DELIVERY, AND AFTER-SALE SERVICES			
Temporary Machine Storage .....	10-1		
Predelivery Service .....	10-1		
Delivery Service .....	10-12		
After-Sale Inspection .....	10-12		

## Group 5

# GENERAL MACHINE SPECIFICATIONS

(Specifications and design subject to change without notice. Wherever applicable, specifications are in accordance with ICED and SAE Standards. Except where otherwise noted, these specifications are based on a unit equipped with 14.9-24, 6 ply rating rear tires; 11L-15, 8 ply rating front tires; 3/4 cu. yd. (0.57 m<sup>3</sup>) bucket; and standard equipment.)

**Power** (@2500 engine rpm):

	SAE	DIN
Gross .....	52 hp (38.8 kW*)	
Net .....	50 hp (37.3 kW)	53.2 PS

Net engine flywheel power is for an engine equipped with fan, air cleaner, water pump, lubricating oil pump, fuel pump, alternator, and muffler. Gross engine power is without fan. Flywheel power ratings are under SAE standard conditions of 500 ft. altitude and 85°F temperature and DIN 70 020 standard conditions of 760 mm Hg barometer (sea level) and 20°C temperature. \*In the International System of Units (SI), power is expressed in kilowatts (kW).

**Engine:** John Deere 3-cylinder diesel, valve-in-head, 4-stroke cycle

Bore and stroke .....	4.02x4.33 in. (102x110 mm)	
Piston displacement .....	164 cu. in. (2687 cm <sup>3</sup> )	
Compression ratio .....	16.2 to 1	
Maximum torque		
@ 1,300 rpm .....	129 lb-ft (175 Nm) (17.8 kg-m)	
NACC or AMA (U.S. Tax) horsepower .....	19.4	
Main bearings .....	4	
Lubrication .....	Pressure system with full flow filter	
Cooling .....	Pressurized with thermostat and fixed bypass	
Fan .....	Suction	
Air cleaner .....	Dry	
Electrical system .....	12 volt with alternator	
Battery (12 volt) reserve capacity .....	60 minutes	110 minutes

**Engine Clutch**... Foot-operated: single 10 in. (254 mm) plate with reverser; single 11 in. (280 mm) plate without reverser

**Transmission**... Constant mesh, 8 forward speeds, 4 reverse with helical gears and sliding collars; mechanical shuttle. Optional hydraulic direction reverser provides 8 speeds forward and 8 reverse: hydraulic wet clutches, no clutching required.

Gear:	Travel Speeds:			
	mph		km/h	
	Fwd.	Rev.	Fwd.	Rev.
1	1.3	1.6	2.1	2.6
2	1.9	2.2	3.1	3.5
3	2.9	3.3	4.7	5.3
4	4.0	4.7	6.4	7.6
5	5.3	6.2	8.5	10.0
6	7.6	8.8	12.2	14.2
7	11.2	13.0	18.0	20.9
8	15.7	18.3	25.3	29.4

**Final Drives**... Inboard, planetary

**Brakes**... Hydraulically actuated, fully enclosed, wet-disk. Self-equalizing. Foot-operated individually or simultaneously.

**Steering**... Manual  
 Turning radius (brake applied) .... 10 ft. 2 in. (3.10 m)  
 Loader clearance circle, dia.

(brake applied) ..... 32 ft. (9.75 m)  
 Number of turns, far left to far right ..... 3.3

**Hydraulic System:** Closed-center  
 Max. pressure 2350 psi (16 203 kPa) (165.2 kg/cm<sup>2</sup>)  
 Loader control..... 2-lever  
 Pump ..... Piston, constant pressure, variable-displacement, 13 gpm (49 L/min) @ 2500 engine rpm

**Hydraulic**

<b>Cylinders:</b>	<b>Bore</b>	<b>Stroke</b>
Boom	2.25 in. (57 mm)	33.28 in. (845 mm)
Bucket	2.25 in. (57 mm)	24.56 in. (624 mm)
Cylinder rods . . . Ground, heat-treated, chrome-plated polished		
Boom, cylinder rods	. . . . . 1.5-in. (38 mm) dia.	
Bucket cylinder rods	. . . . . 1.25-in. (32 mm) dia.	

<b>Tires:</b>	<b>Front</b>	<b>Rear</b>
Turf	27-9.50-15, 6 ply rating, 11 Terra tires	18.4-16A, 6 ply rating, R3
	27-9.50-15, 10 ply rating, 11 Terra tires	

Utility	6.50-16, 6 ply rating, 11	13.6-28, 4 ply rating, R1
	11L-15, 8 ply rating, 1-1A	14.9-24, 6 ply rating, R4
	7.50/8.00-16, 6 ply rating F3	14.9-24, 6 ply rating, R3
		14.9-24, 6 ply rating, R1
		16.9-24, 6 ply rating, R3
		17.5L-24, 8 ply rating, R4

**Front Axle** . . . . . Swept-back, adjustable

**Wheel Treads** (dependent on tires and front axle):  
 Front . . . . . 49 to 74 in. (1.25 to 1.88 m)  
 Rear . . . . . 48 to 76 in. (1.22 to 1.93 m)

<b>Capacities:</b>	<b>U.S.</b>	<b>Liters</b>
Cooling system	3 gal.	11.4
Fuel tank	19.5 gal.	73.8
Engine lubrication, including filter	6 qt.	5.7
Transmission and hydraulic system	10 gal.	37.9

**Dimensions:**


Height to top of hood	. . . . . 4 ft. 7 in. (1.40 m)
Overall height to top of muffler	. . . . . 6 ft. 7 in. (2.01 m)
Overall height to top of canopy	. . . . . 7 ft. 2 in. (2.18 m)
Overall width w/60 in. tread width	. . . . . 6 ft. 3 in. (1.90 m)
Overall length	. . . . . 15 ft. 1.5 in. (4.61 m)
Overall length w/3-point hitch	. . . . . 16 ft. 2.5 in. (4.94 m)
Wheelbase	. . . . . 74.4 in. (1.89 m)
Ground clearance (under front axle)	. . . . . 1 ft. 5 in. (430 mm)
Ground clearance, min.	. . . . . 11 in. (280 mm)

**Additional Standard Equipment:**

- Oil pressure indicator light
- Alternator charge indicator light
- Coolant temperature gauge
- Fuel gauge
- Speed-hour meter
- Horn
- Key switch safety start
- Cushioned seat
- Vertical muffler w/rain cap
- Transistorized voltage regulator
- Fenders
- Antifreeze
- Two-position disk rear wheels
- 3/4 yard loader bucket
- Air cleaner restriction indicator
- Cigar lighter
- Cold weather starting aid

**SAE Operating Weight** . . . . . 6150 lb. (2 790 kg)

**DIMENSIONS**

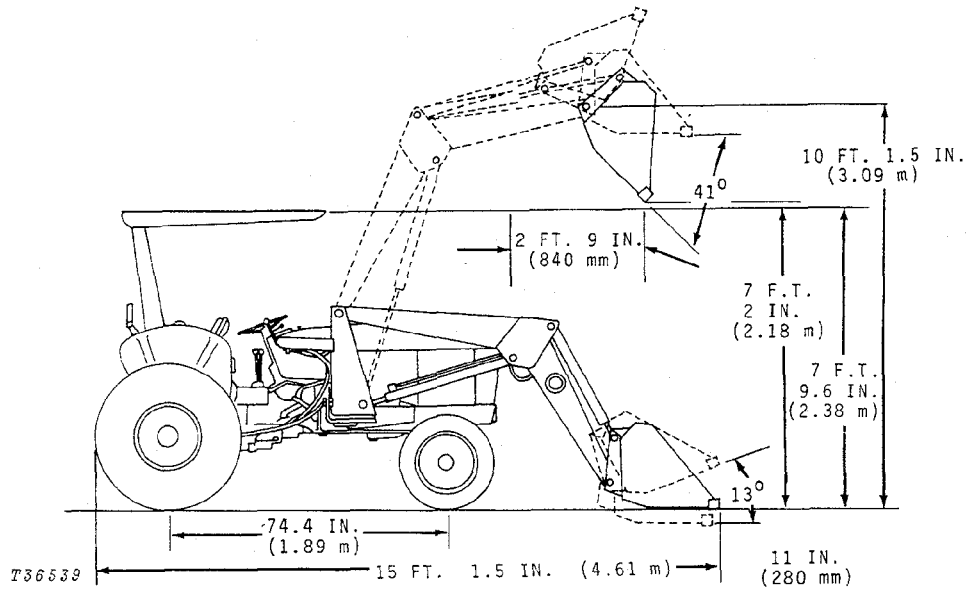

**Special Equipment:**

- Batteries (2); reserve capacity 220 minutes
- Deluxe seat
- Differential lock
- Fixed front axle
- Foot throttle
- Front grille guard
- Hydraulic direction reverser
- Lights
- Mid PTO (1000 rpm "live," w/rear PTO)
- Muffler extension (vertical muffler)
- Parking brake
- Power steering
- Rear muffler
- Rear PTO (continuous "live" or independent 540 rpm)
- Remove hydraulic cylinder
- Single or dual remote-cylinder control w/quick-connect couplers
- ROPS and seat belt, w/ or w/o canopy
- Swinging drawbar
- 3-inch seat belt
- 3-point hitch (Category 1 or 2 w/sway blocks and regular or short links)
- Toolbox

**LOADER SPECIFICATIONS**

Buckets:	Nominal Heaped Capacity	Width
	3/4 cu. yd. (0.57 m <sup>3</sup> )	73.8 in. (1.88 m)

**Operating Information:**

Breakout force .....	4000 lb. (17.92 kN) (1814 kg)
Lifting capacity, full height .....	2500 lb. (1134 kg)
Raising time to full height .....	5.1 sec.
Bucket dump time .....	2.9 sec.
Lowering time (power) .....	3.0 sec.
Rollback time .....	2.6 sec.
Float-down time .....	6.1 sec.
Recommended rear ballast .....	2000 lb. (910 kg)



## Group 10 PREDELIVERY, DELIVERY, AND AFTER-SALE SERVICES

### TEMPORARY UNIT STORAGE

After receiving your unit from the factory and before putting the machine into temporary storage, perform the following checks and services.

For long term storage (over 30 days) information, consult your JD302 operator's manual.


1. Check battery electrolyte level and charge the battery, if necessary.
2. Check engine coolant level. Maintain midway between the radiator core and filler neck.
3. Fill the fuel tank.
4. Check crankcase oil level. Oil must be between marks on dipstick after machine has been shut down for 10 minutes.
5. Relieve hydraulic pressure by stopping engine, lowering bucket and operating control levers and steering wheel until system fails to respond.
6. Reduce shipping pressure of all tires to the inflation pressure listed on page 10-10-2.

### PREDELIVERY SERVICE

Because of the shipping factors involved, plus extra finishing touches that are necessary to promote customer satisfaction, proper predelivery service is of prime importance to the dealer and the customer.

Use the following list when preparing a unit for delivery to the customer.

### 1. Air Cleaner

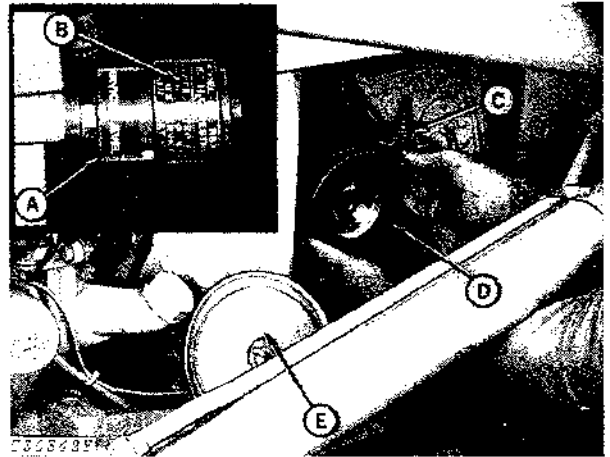

A—Restriction Indicator  
B—Red Signal  
C—Wing Nut

D—Element  
E—Cover

Fig. 1—Air Cleaner

Check air filter restriction indicator (A). If red signal can be fully seen, remove element (D) and clean. Install a new element if necessary.

Element checked

Yes No

### 2. Radiator

Check engine coolant level.

**CAUTION:** Do not remove radiator filler cap unless the engine is cool. Then loosen the cap slowly to the stop to relieve pressure before removing the cap.

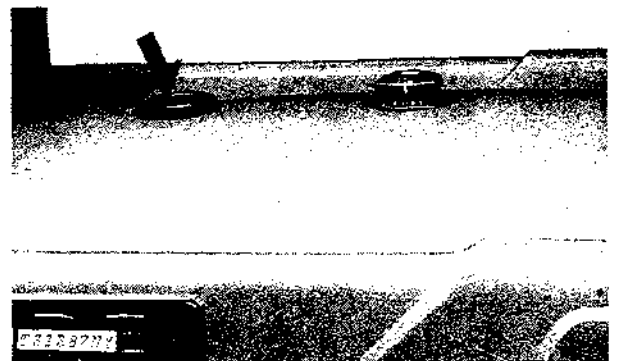


Fig. 2—Radiator Filler Cap



Maintain coolant level midway between the radiator core and the filler neck. If needed add clean soft water for warm weather, or a solution of 50% clean water and 50% ethylene glycol (permanent type antifreeze with approved rust inhibitor) for cold weather.

Check cooling system for loose connections and leaks.

Coolant level checked Yes No

#### 4. Tire Pressure

Check tire pressure with an accurate gauge having 1 psi (0.07 bar) graduations.

Inflate tires according to the chart below.

#### FRONT TIRE INFLATION

Tire Size	Type	PR	Inflation Pressure		
			With Towed or Rear-Mounted Equipment	With Light Front-Mounted Equipment	With Heavy Front-Mounted Equipment
6.50-16	I-1	6	36 psi (2.5 bar)	40 psi (2.8 bar)	48 psi (3.3 bar)
7.50/8.00-16	F-3	6	28 psi (1.9 bar)	32 psi (2.2 bar)	36 psi (2.5 bar)
27x9.50-15	I-1	6	35 psi (2.4 bar)	40 psi (2.8 bar)	Do not use
27x9.50-15	I-1	10	55 psi (3.8 bar)	60 psi (4.1 bar)	65 psi (4.5 bar)
11L-15	F-3	8	40 psi (2.8 bar)	40 psi (2.8 bar)	40 psi (2.8 bar)

#### REAR TIRE INFLATION

Tire Size	PR	Inflation Pressure		
		With Little Ballast or No Rear-Mounted Equipment	With Moderate Ballast or Light Rear-Mounted Equipment	With Maximum Ballast or Heavy Rear-Mounted Equipment
13.6-28	4	14 psi (1.0 bar)	14 psi (1.0 bar)	Do not use
14.9-24	6	14 psi (1.0 bar)	16 psi (1.1 bar)	18 psi (1.2 bar)
16.9-24	6	18 psi (1.2 bar)	20 psi (1.4 bar)	22 psi (1.5 bar)
17.5L-24	8	24 psi (1.7 bar)	24 psi (1.7 bar)	24 psi (1.7 bar)
18.4-16A	6	14 psi (1.0 bar)	14 psi (1.0 bar)	Do not use

Tire pressure checked Yes No

#### 3. Battery


Check battery electrolyte level. If distilled water is not available, use clean soft water. Avoid use of hard water. Remove foreign material from top of battery and coat terminals with petroleum jelly. Check vent holes in battery caps.

**IMPORTANT: Never add water to battery in freezing weather unless engine will be run 2 or 3 hours.**

Punch date code on battery.

Battery checked Yes No

### 5. Crankcase Oil Level

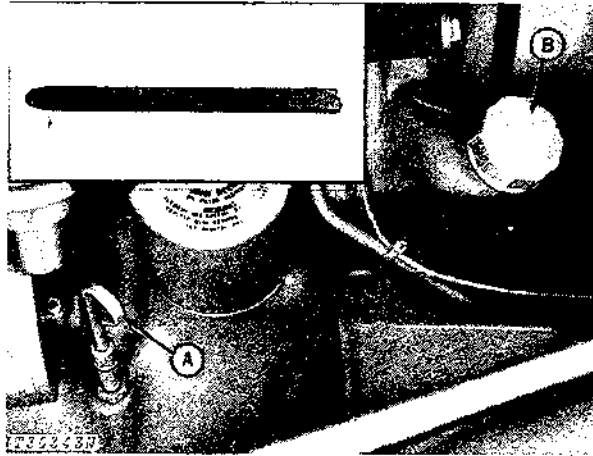

A—Dipstick B—Oil Filler Cap

Fig. 3-Crankcase Oil Level

Check crankcase oil level with machine on level ground. Allow a minimum of 10 minutes for the oil to drain down before checking. If oil level is at or below bottom mark on dipstick, add oil specified on page 10-15-1 to bring oil level to between marks on dipstick. Do not operate engine with oil level below the bottom mark.

Crankcase oil level checked Yes No  
 Oil added qts. (L)

### 6. Transmission Oil Level

Check transmission-hydraulic oil level.



Fig. 4-Transmission-Hydraulic System Dipstick Resting On Top Threads



Fig. 5-Transmission-Hydraulic System Filler Cap

Run engine two to three minutes to fill oil circuits. Check oil level with machine on level ground, engine running at slow idle, rockshaft and any equipment lowered, reverser lever (if equipped) locked in neutral, parking brake engaged (if equipped), range shift lever in park, and clutch engaged. Remove dipstick and wipe off oil. Insert dipstick with cap resting on threads of tube (not screwed in place). If oil level is down to bottom mark on dipstick, add oil. Remove filler cap on rockshaft housing and add oil specified on page 10-15-1 to bring oil level to top mark on dipstick.

Oil Level checked Yes No  
 Oil added qts. (L)

### 7. Fuel Tank

Fill fuel tank with correct fuel. Check action of fuel gauge.


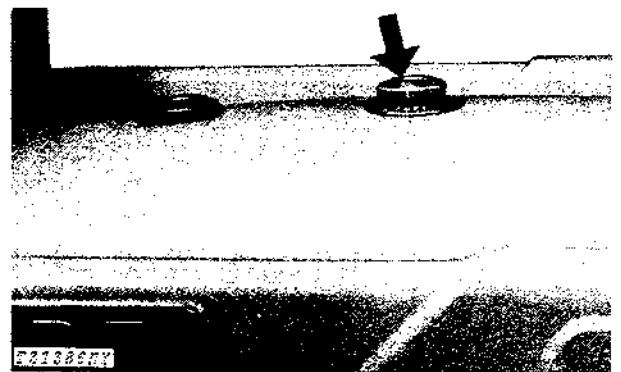


Fig. 6-Fuel Tank Filler Cap

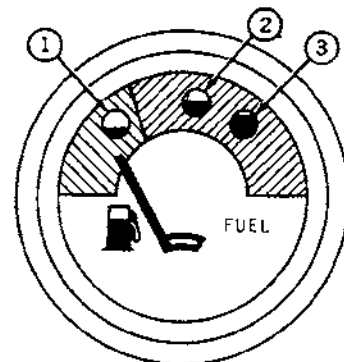

T31392


1—Empty Tank 2—Half Full Tank 3—Full Tank

Fig. 7-Fuel Gauge

Fuel tank filled Yes No  
 Fuel gauge checked Yes No

### 8. Grease Fittings


All grease fittings were lubricated and checked before the unit left the factory. However, to insure customer satisfaction, check each fitting shown. Lubricate, if necessary, with John Deere Multi-Purpose Grease or an equivalent.

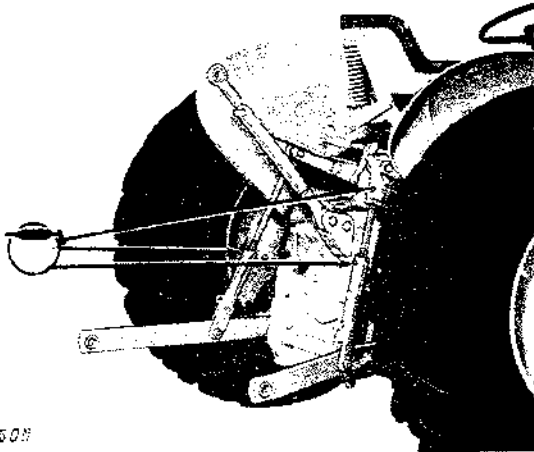

T221450Y

Fig. 8-3-Point Hitch (3 points)


Lubrication required Yes No

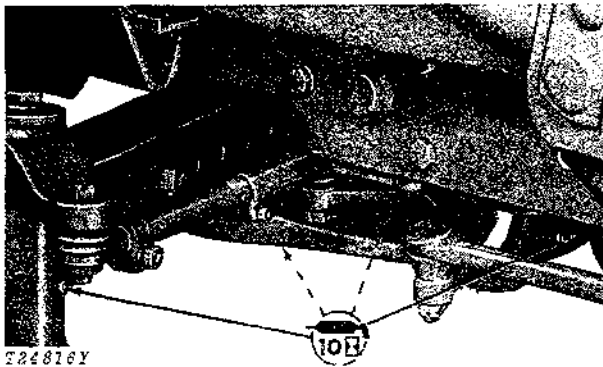

T24816Y

Fig. 9-Front Axle Pivot Points (4 points)


Lubrication required Yes No

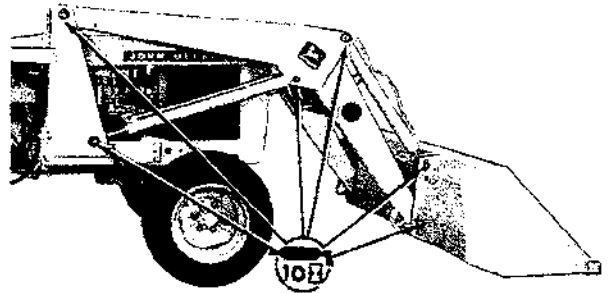

T32550Y

Fig. 10-Loader Pivot Points (12 points)

Lubrication required Yes No

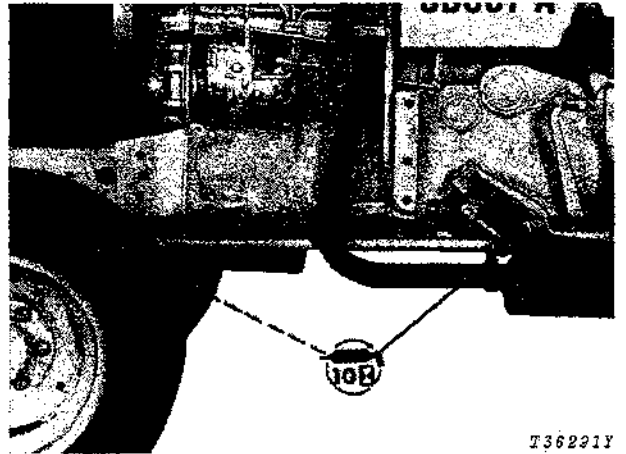

T36221Y

Fig. 11-Drag Links (2 points)

Lubrication required Yes No

### 9. Air Intake Hoses

Check clamps on hoses connecting air cleaner and engine. Tighten hose clamps where necessary. Inspect hoses for cracks.

Intake hoses checked Yes No

### 10. Alternator - Fan Belt Tension

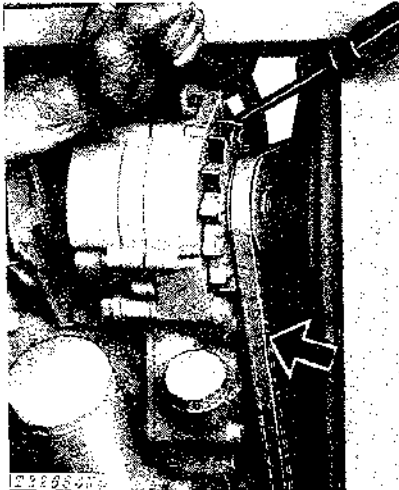


Fig. 12-Alternator - Fan Belt Tension

Check alternator-fan belt tension. Loosen the alternator bracket and adjusting cap screws. Apply outward force to the FRONT alternator frame until 20 lb (9 kg) force on the belt midway between the pulleys will deflect the belt 3/4 inch (19 mm). If a tension gauge is used, strand tension must be 90 lb (41 kg).

**IMPORTANT:** Do not pry on the rear of the alternator housing.

Belt tension checked Yes No

### 11. Engine Speeds

Check engine speeds.

Slow idle - 825 rpm  
Fast idle - 2650 rpm hand throttle  
2800 rpm foot throttle

If adjustment is needed, see page 10-10-18.

Engine speeds checked Yes No

### 12. Fuel Filter



Fig. 13-Fuel Filter

Check fuel filter for sediment. Drain if necessary.

Fuel filter checked Yes No