




Service Manual

331, 331E, 334 Compact Excavator

331 S/N AAC511001 & Above
S/N A9K511001 & Above
331E S/N A9K911001 & Above
334 S/N A9K711001 & Above

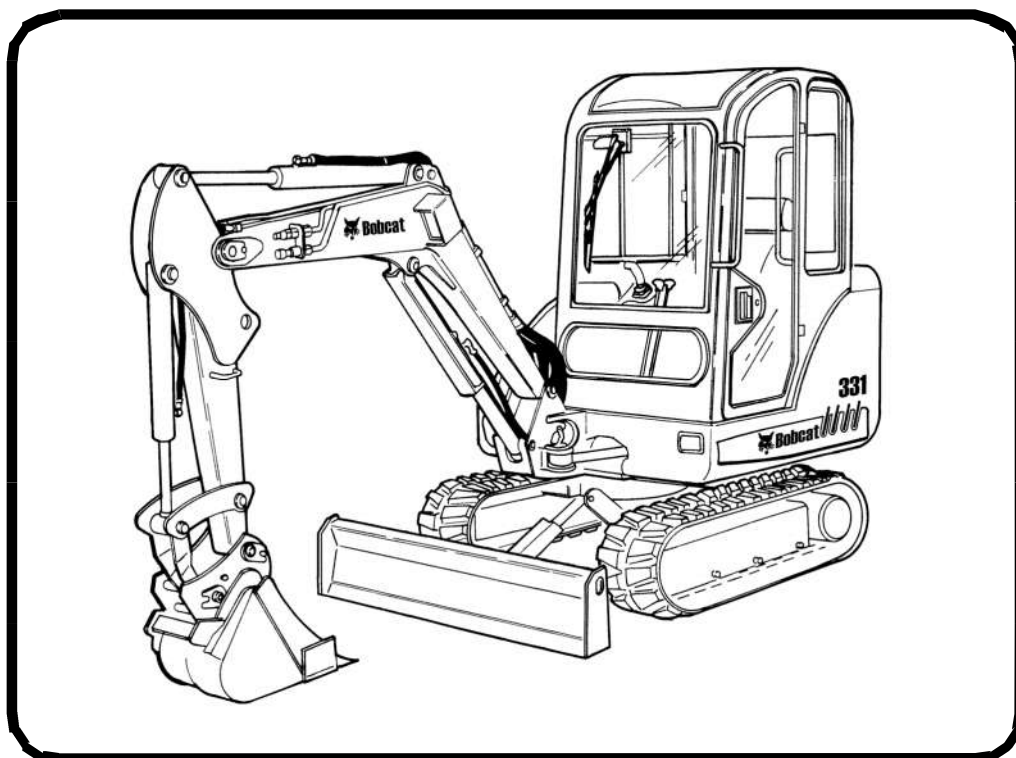

MAINTENANCE SAFETY




WARNING

Instructions are necessary before operating or servicing machine. Read and understand the Operation & Maintenance Manual, Operator's Handbook and signs (decals) on machine. Follow warnings and instructions in the manuals when making repairs, adjustments or servicing. Check for correct function after adjustments, repairs or service. Untrained operators and failure to follow instructions can cause injury or death.

W-2003-0807




Safety Alert Symbol: This symbol with a warning statement, means: "Warning, be alert! Your safety is involved!" Carefully read the message that follows.

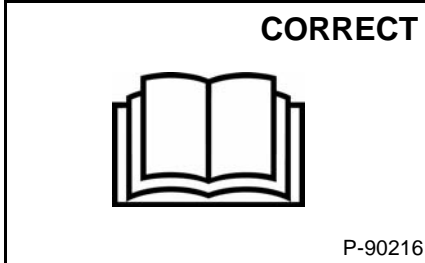


P-90216

- ⚠ Never service the Bobcat Excavator without instructions.

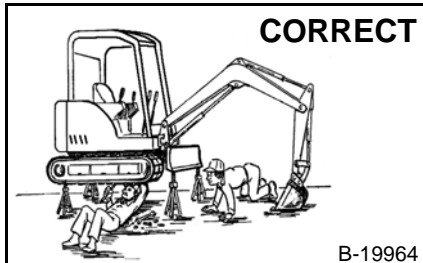


B-19964

- ⚠ Use the correct procedure to lift and support the excavator.

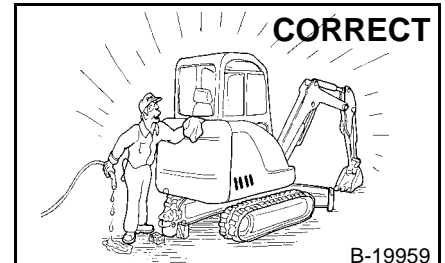


B-19959

- ⚠ Cleaning and maintenance are required daily.

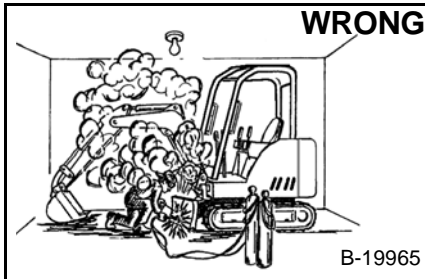


B-19965

- ⚠ Have good ventilation when welding or grinding painted parts.
- ⚠ Wear dust mask when grinding painted parts. Toxic dust and gas can be produced.

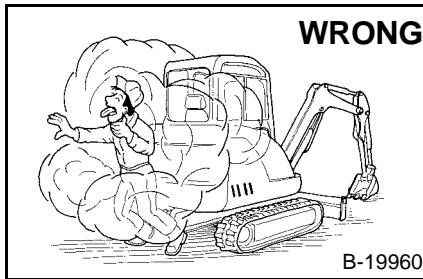


B-19960

- ⚠ Vent exhaust to outside when engine must be run for service.
- ⚠ Exhaust system must be tightly sealed. Exhaust fumes can kill without warning.

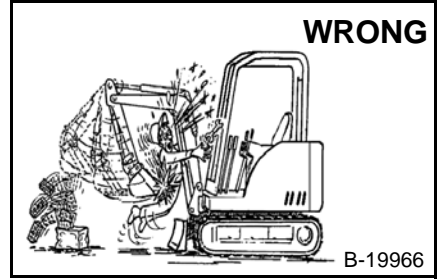


B-19966

- ⚠ Always lower the bucket and blade to the ground before doing any maintenance.
- ⚠ Never modify equipment or add attachments not approved by Bobcat Company.

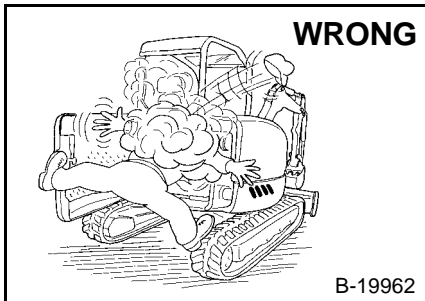


B-19962

- ⚠ Stop, cool and clean engine of flammable materials before checking fluids.
- ⚠ Never service or adjust machine with the engine running unless instructed to do so in the manual.
- ⚠ Avoid contact with leaking hydraulic fluid or diesel fuel under pressure. It can penetrate the skin or eyes.
- ⚠ Never fill fuel tank with engine running, while smoking, or when near open flame.

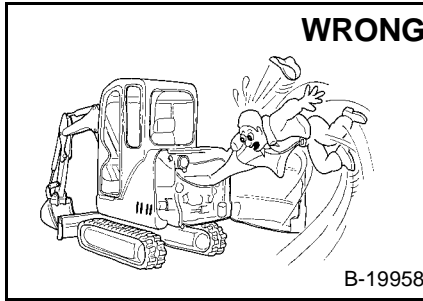

B-19958

- ⚠ Keep body, jewelry and clothing away from moving parts, electrical contact, hot parts and exhaust.
- ⚠ Wear eye protection to guard from battery acid, compressed springs, fluids under pressure and flying debris when engines are running or tools are used. Use eye protections approved for type of welding.
- ⚠ Keep tailgate closed except for service. Close and latch tailgate before operating the excavator.

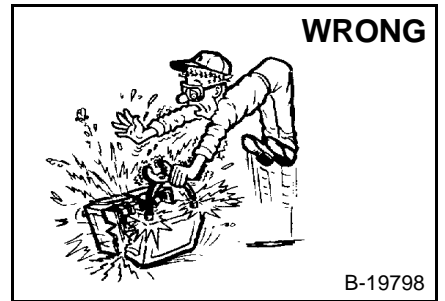

B-19798

- ⚠ Lead-acid batteries produce flammable and explosive gases.
- ⚠ Keep arcs, sparks, flames and lighted tobacco away from batteries.
- ⚠ Batteries contain acid which burns eyes or skin on contact.
- ⚠ Wear protective clothing. If acid contacts body, flush well with water. For eye contact flush well and get immediate medical attention.

Maintenance procedures which are given in the Operation & Maintenance Manual can be performed by the owner/operator without any specific technical training. Maintenance procedures which are **not** in the Operation & Maintenance Manual must be performed **ONLY BY QUALIFIED BOBCAT SERVICE PERSONNEL**. Always use genuine Bobcat replacement parts. The Service Safety Training Course is available from your Bobcat dealer.

MSW28-0409



Bobcat®

ALPHABETICAL INDEX

AIR CLEANER	60-01	FUEL LEVEL SENDER	50-01
AIR CLEANER SERVICE	10-01	FUEL SYSTEM.....	10-01
AIR CONDITIONING SERVICE.....	70-01	FUEL TANK	40-01
AIR CONDITIONING SYSTEM FLOW	70-01		
ALTERNATOR	50-01	GENERAL AIR CONDITIONING SERVICE	
ARM CYLINDER	20-01	GUIDELINES	70-01
BASIC TROUBLESHOOTING	70-01	HEATER COIL	70-01
BATTERY	50-01	HEATER A/C FAN	70-01
BLADE	30-01	HEATER AIR FILTER	
BLADE CONTROL.....	40-01	(WITH CAB OPTION ONLY)	10-01
BLADE CYLINDER	20-01	HEATER VALVE	70-01
BOOM	40-01	HORN	40-01
BOOM CYLINDER.....	20-01	HYDRAULIC CONTROL VALVE	20-01
BOOM SWING CYLINDER.....	20-01	HYDRAULIC CONNECTION SPECS	SPEC-01
BOOM SWING LOCK VALVE	20-01	HYDRAULIC FLUID SPECIFICATIONS.....	SPEC-01
BUCKET	40-01	HYDRAULIC FILTER MOUNT.....	20-01
BUCKET CYLINDER	20-01	HYDRAULIC PUMP	20-01
		HYDRAULIC PUMP START UP	20-01
CAB.....	40-01	HYDRAULIC RESERVOIR.....	20-01
CASE DRAIN FILTER	20-01	HYDRAULIC SYSTEM	10-01
CLAMP	40-01	HYDRAULIC SYSTEM INFORMATION	20-01
CLAMP CYLINDER	20-01	HYDRAULIC X-CHANGE VALVE	20-01
COMPONENTS	70-01	LEFT CONTROL LEVER (JOYSTICK)	20-01
COMPRESSOR	70-01	LEFT CONSOLE	40-01
CONDENSOR	70-01	LIFTING AND BLOCKING THE EXCAVATOR	10-01
CONVERSIONS	SPEC-01	LIFTING THE EXCAVATOR	10-01
CONTROL PATTERN SELECTOR VALVE	20-01	LIGHTS.....	50-01
CROSS PORT RELIEF VALVES	20-01	LUBRICATION OF THE HYDRAULIC	
		EXCAVATOR	10-01
DIAGNOSTICS SERVICE CODES.....	50-01		
DIRECT TO TANK VALVE	20-01	MAGNETIC LOCKOUT SENSOR	50-01
DELUXE INSTRUMENT PANEL SETUP.....	50-01	MAIN RELIEF VALVE	20-01
		MANIFOLD ASSEMBLY/ACCUMULATOR	20-01
ELECTRICAL SYSTEM INFORMATION	50-01		
ENGINE	60-01	OIL COOLER.....	20-01
ENGINE ACCESSORY DRIVE BELT	10-01	OPERATOR CAB (ROPS/TOPS)	10-01
ENGINE COMPONENTS AND TESTING	60-01		
ENGINE COOLING SYSTEM.....	10-01	PORT RELIEF VALVES.....	20-01
ENGINE FLYWHEEL	60-01	PRESSURE REDUCING VALVE.....	20-01
ENGINE LUBRICATION SYSTEM.....	10-01	PRESSURE RELIEF VALVE	70-01
ENGINE SPECIFICATIONS.....	SPEC-01	PRESSURE SWITCH	70-01
ENGINE SPEED CONTROL	40-01		
EXTENDIBLE ARM	40-01	RADIATOR	60-01
EXTENDIBLE ARM CYLINDER	20-01	RECEIVER/DRIER	70-01
EVAPORATOR.....	70-01	RECONDITIONING THE ENGINE	60-01
EVAPORATOR/HEATER UNIT	70-01	REGULAR MAINTENANCE	70-01
EXPANSION VALVE	70-01	RIGHT CONTROL LEVER (JOYSTICK)	20-01
EXTENDIBLE ARM CYLINDER	20-01	RIGHT CONSOLE.....	40-01
		RIGHT PEDAL AND LINKAGE	40-01
FLOORMAT AND FLOOR PANELS	40-01	RIGHT SIDE COVER	10-01, 40-01
FUEL, COOLANT AND LUBRICANTS	SPEC-01	ROPS CANOPY.....	40-01

Continued On Next Page

ALPHABETICAL INDEX (CONT'D)

SAFETY	70-01
SEAT AND MOUNT	40-01
SEAT BELT	10-01
SERVICE SCHEDULE	10-01
SPARK ARRESTOR MUFFLER	10-01, 60-01
SPECIFICATIONS	SPEC-01
STANDARD AND LONG ARM	40-01
STARTER	50-01
SWING CIRCLE GEAR	30-01
SWING FRAME	40-01
SWING MOTOR	20-01
SWING MOTOR DRIVE CARRIER.....	20-01
SWIVEL JOINT	20-01
SYSTEM CHARGING AND RECLAMATION.....	70-01
SYSTEM TROUBLESHOOTING CHART	70-01
TAILGATE	10-01, 40-01
TEMPERATURE/PRESSURE	70-01
THERMOSTAT	70-01
TORQUE SPECIFICATIONS	SPEC-01
TRACK DAMAGE IDENTIFICATION.....	30-01
TRACK FRAME	30-01
TRACK IDLER	30-01
TRACK ROLLER.....	30-01
TRACKS	30-01
TRANSPORTING THE EXCAVATOR.....	10-01
TRAVEL CONTROLS	40-01
TRAVEL CONTROL VALVE	20-01
TRAVEL MOTOR.....	10-01, 20-01
TROUBLESHOOTING.....	60-01
TWO SPEED SWITCH	50-01
UPPERSTRUCTURE	40-01
UPPERSTRUCTURE SLEW LOCK	10-01
X-CHANGE	40-01
X-CHANGE (HYDRAULIC).....	40-01

CONTENTS

FOREWORD.....	II
SAFETY INSTRUCTIONS	IV
FIRE PREVENTION	VI
SERIAL NUMBER LOCATIONS	VIII
DELIVERY REPORT.....	IX
BOBCAT EXCAVATOR IDENTIFICATION	X
SAFETY & MAINTENANCE	10-01
HYDRAULIC SYSTEM	20-01
UNDERCARRIAGE.....	30-01
UPPERSTRUCTURE & SWING SECTION	40-01
ELECTRICAL SYSTEM & ANALYSIS.....	50-01
ENGINE SERVICE	60-01
HEATING, VENTILATION, AIR CONDITIONING	70-01
SPECIFICATIONS.....	SPEC-01

**SAFETY &
MAINTENANCE**

**HYDRAULIC
SYSTEM**

UNDERCARRIAGE

**UPPERSTRUCTURE
& SWING
SECTION**

**ELECTRICAL
SYSTEM &
ANALYSIS**

**ENGINE
SERVICE**

**HEATING,
VENTILATION,
AIR CONDITIONING**

SPECIFICATIONS

FOREWORD


This manual is for the Bobcat excavator mechanic. It provides necessary servicing and adjustment procedures for the Bobcat excavator and its component parts and systems. Refer to the Operation & Maintenance Manual for operating instructions, starting procedure, daily checks, etc.

A general inspection of the following items must be made after the excavator has had service or repair:


1. Check that the ROPS/TOPS/FOPS is in good condition and is not modified.




9. Safety treads must be in good condition.




2. Check that ROPS/TOPS mounting hardware is tightened and is Bobcat approved.




10. Check for correct function of indicator lamps.



3. The seat belt must be correctly installed, functional and in good condition.




11. Check hydraulic fluid level, engine oil level and fuel supply.




4. Machine signs (decals) must be legible and in the correct location.




12. Inspect for fuel, oil or hydraulic fluid leaks.



5. Travel levers, control levers and foot pedals must return to neutral. Check that the pedal locks are in working order.




13. Lubricate the excavator.




6. Check for correct function of the work lights.




14. Check the condition of the battery and cables.




7. Enclosure door latches must open and close freely.




15. Inspect the air cleaner for damage or leaks. Check the condition of the element.



8. Attachment locking pins must function correctly and be in good condition.




16. Check the electrical charging system.




FW EXC-0509 SM

17. Check tracks for wear and tension. Use only approved tracks.



18. Inspect for loose or broken parts or connections.




19. Check for any field modification not completed.




20. Operate the machine and check all functions.



21. Check the control console interlocks for correct function.




22. Inspect the X-Change™ for wear or damage. Repair or replace damaged parts.



23. Check function or condition of all equipped options and accessories (examples: special applications kit, motion alarm, etc.).



24. Recommend to the owner that all necessary corrections be made before the machine is returned to service.



**CALIFORNIA
PROPOSITION 65 WARNING**

Diesel engine exhaust and some of its constituents are known to the state of California to cause cancer, birth defects and other reproductive harm.

SAFETY INSTRUCTIONS



Safety Alert Symbol

This symbol with a warning statement means: “Warning, be alert! Your safety is involved!” Carefully read the message that follows.



WARNING

Instructions are necessary before operating or servicing machine. Read and understand the Operation & Maintenance Manual, Operator’s Handbook and signs (decals) on machine. Follow warnings and instructions in the manuals when making repairs, adjustments or servicing. Check for correct function after adjustments, repairs or service. Untrained operators and failure to follow instructions can cause injury or death.

W-2003-0903

IMPORTANT

This notice identifies procedures which must be followed to avoid damage to the machine.

I-2019-0284



DANGER

The signal word DANGER on the machine and in the manuals indicates a hazardous situation which, if not avoided, will result in death or serious injury.

D-1002-1107



WARNING

The signal word WARNING on the machine and in the manuals indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.

W-2044-1107

The following publications provide information on the safe use and maintenance of the Bobcat machine and attachments:

- The Delivery Report is used to assure that complete instructions have been given to the new owner and that the machine is in safe operating condition.
- The Operation & Maintenance Manual delivered with the machine or attachment contains operating information as well as routine maintenance and service procedures. It is a part of the machine and can be stored in a container provided on the machine. Replacement Operation & Maintenance Manuals can be ordered from your Bobcat dealer.
- Machine signs (decals) instruct on the safe operation and care of your Bobcat machine or attachment. The signs and their locations are shown in the Operation & Maintenance Manual. Replacement signs are available from your Bobcat dealer.
- An Operator’s Handbook fastened to the operator cab. It’s brief instructions are convenient to the operator. The handbook is available from your dealer in an English edition or one of many other languages. See your Bobcat dealer for more information on translated versions.
- The AEM Safety Manual delivered with the machine gives general safety information.
- The Service Manual and Parts Manual are available from your dealer for use by mechanics to do shop-type service and repair work.
- The Compact Excavator Operator Training Course is available through your local dealer or at www.training.bobcat.com or www.bobcat.com. This course is intended to provide rules and practices of correct operation of the Bobcat excavator. The course is available in English and Spanish versions.
- Service Safety Training Courses are available from your Bobcat dealer or at www.training.bobcat.com or www.bobcat.com. They provide information for safe and correct service procedures.
- The Bobcat compact excavator Safety Video is available from your Bobcat dealer or at www.training.bobcat.com or www.bobcat.com.

SI EXC-0308 SM

SAFETY INSTRUCTIONS (CONT'D)

The dealer and owner / operator review the recommended uses of the product when delivered. If the owner / operator will be using the machine for a different application(s) he or she must ask the dealer for recommendations on the new use.



Cutting or drilling concrete containing sand or rock containing quartz may result in exposure to silica dust. Do not exceed Permissible Exposure Limits (PEL) to silica dust as determined by OSHA or other job site Rules and Regulations. Use a respirator, water spray or other means to control dust. Silica dust can cause lung disease and is known to the state of California to cause cancer.

Call Before You Dig
Dial 811 (USA Only)
1-888-258-0808 (USA & Canada)

When you call, you will be directed to a location in your state / province, or city for information about buried lines (telephone, cable TV, water, sewer, gas, etc.).

FIRE PREVENTION



Maintenance

The machine and some attachments have components that are at high temperatures under normal operating conditions. The primary source of high temperatures is the engine and exhaust system. The electrical system, if damaged or incorrectly maintained, can be a source of arcs or sparks.

Flammable debris (leaves, straw, etc.) must be removed regularly. If flammable debris is allowed to accumulate, it can cause a fire hazard. Clean often to avoid this accumulation. Flammable debris in the engine compartment is a potential fire hazard.

The operator's area, engine compartment and engine cooling system must be inspected every day and cleaned if necessary to prevent fire hazards and overheating.

All fuels, most lubricants and some coolants mixtures are flammable. Flammable fluids that are leaking or spilled onto hot surfaces or onto electrical components can cause a fire.

Operation

Do not use the machine where exhaust, arcs, sparks or hot components can contact flammable material, explosive dust or gases.

Electrical



Check all electrical wiring and connections for damage. Keep the battery terminals clean and tight. Repair or replace any damaged part or wires that are loose or frayed.

Battery gas can explode and cause serious injury. Use the procedure in the Operation & Maintenance Manual for connecting the battery and for jump starting. Do not jump start or charge a frozen or damaged battery. Keep any open flames or sparks away from batteries. Do not smoke in battery charging area.

Hydraulic System

Check hydraulic tubes, hoses and fittings for damage and leakage. Never use open flame or bare skin to check for leaks. Hydraulic tubes and hoses must be properly routed and have adequate support and secure clamps. Tighten or replace any parts that show leakage.

Always clean fluid spills. Do not use gasoline or diesel fuel for cleaning parts. Use commercial nonflammable solvents.

Fueling



Stop the engine and let it cool before adding fuel. No smoking! Do not refuel a machine near open flames or sparks. Fill the fuel tank outdoors.

Starting

Do not use ether or starting fluids on any engine that has glow plugs. These starting aids can cause explosion and injure you or bystanders.

Use the procedure in the Operation & Maintenance Manual for connecting the battery and for jump starting.

Spark Arrestor Exhaust System

The spark arrestor exhaust system is designed to control the emission of hot particles from the engine and exhaust system, but the muffler and the exhaust gases are still hot.

Check the spark arrestor exhaust system regularly to make sure it is maintained and working properly. Use the procedure in the Operation & Maintenance Manual for cleaning the spark arrestor muffler (if equipped).

Dear

**Thanks very much for your visiting and
patience.**

Want to get more information,

Please click here, Go back to the page.

**After your payment, you will have instant access to
your download.**

The Download Link will also be sent to your e-mail.

You will get the complete manual

Have any questions

please write to me

admin@servicemanualperfect.com