

**2440 AND 2640
TRACTORS
(S/N -340999)**




**TECHNICAL MANUAL
2440 AND 2640 TRACTORS
(S/N -340999)**

TM1142 (01MAR81) English

**JOHN DEERE TRACTOR WORKS
TM1142 (01MAR81)**

LITHO IN THE U.S.A.
ENGLISH



**2440 AND 2640
TRACTORS**
(Serial No. -340999)
**TECHNICAL MANUAL
TM-1142 (Sep-75)**

All information, illustrations and specifications contained in this technical manual are based on the latest information available at the time of publication. The right is reserved to make changes at any time without notice.

Copyright© 1975
DEERE & COMPANY
Moline, Illinois
All rights reserved

Litho in U.S.A.

GENERAL 10

ENGINE 20

FUEL SYSTEM 30

ELECTRICAL SYSTEM 40

POWER TRAIN 50

STEERING AND BRAKES 60

HYDRAULIC SYSTEM 70

MISCELLANEOUS 80

**Thanks very much for your reading,
Want to get more information,
Please click here, Then get the complete
manual**


JustClickHere 

NOTE:

**If there is no response to click on the link above,
please download the PDF document first, and then
click on it.**

**Have any questions please write to me:
admin@servicemanualperfect.com**

INTRODUCTION

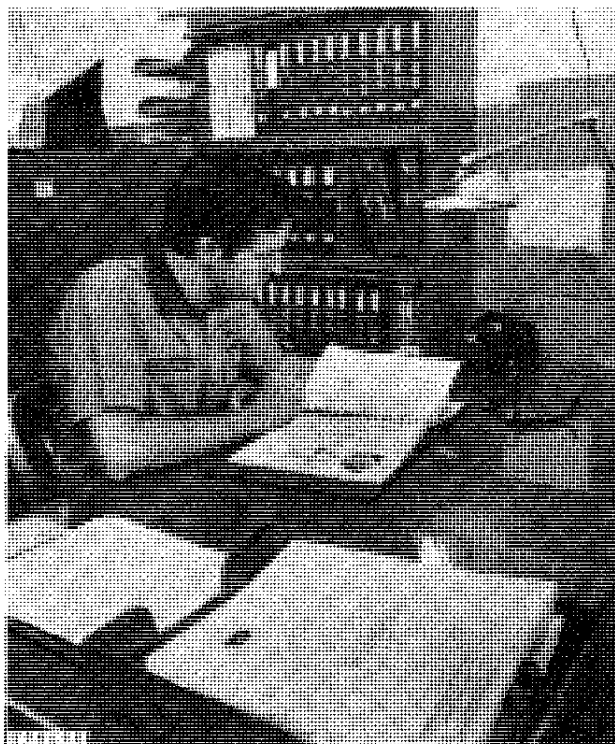

Use FOS Manuals for Reference

This technical manual is part of a twin concept of service:

- **FOS Manuals—for reference**
- **Technical Manuals—for actual service**

The two kinds of manuals work as a team to give you both the general background and technical details of shop service.

Fundamentals of Service (FOS) Manuals cover basic theory of operation, *fundamentals* of trouble shooting, *general* maintenance, and *basic* types of failures and their causes. FOS Manuals are for training new personnel and for reference by experienced technicians.

Technical Manuals are *concise* service guides for a *specific* machine. Technical Manuals are on-the-job guides containing only the vital information needed by an experienced technician.



When a service person should refer to a FOS Manual for more information, a FOS symbol like the one at the left is used in the TM to identify the reference.




Use Technical Manuals for Actual Service

Some features of this technical manual:

- *Table of contents at front of manual*
- *Exploded views showing parts relationship*
- *Photos showing service techniques*
- *Specifications grouped for easy reference*

This technical manual was planned and written for you—an experienced technician. Keep it in a permanent binder in the shop where it is handy. Refer to it whenever in doubt about correct service procedures or specifications.

Using the technical manual as a guide will reduce error and costly delay. It will also assure you the best in finished service work.

 This safety alert symbol identifies important safety messages in this manual. When you see this symbol, be alert to the possibility of personal injury and carefully read the message that follows.

Section 10 GENERAL

CONTENTS OF THIS SECTION

	Page		Page
GROUP 5 - GENERAL TRACTOR SPECIFICATIONS (2440)	5-1	GROUP 25 - SEPARATION (2440)	
GROUP 7 - GENERAL TRACTOR SPECIFICATIONS (2640)	7-1	Separating Tractor Front End From Engine	25-1
GROUP 10 - PREDELIVERY, DELIVERY, AND AFTER-SALE SERVICES		Removing Engine	25-2
Predelivery Service	10-1	Separating Engine From Clutch Housing	25-3
Delivery Service	10-4	Separating Clutch Housing From Transmission Case	25-5
After-Sale Inspection	10-4	Removing Final Drive Assembly	25-6
GROUP 15 - TUNE-UP		GROUP 27 - SEPARATION (2640)	
Preliminary Engine Testing	15-1	Separating Tractor Front End From Engine	27-1
Engine Tune-Up	15-1	Removing Engine	27-2
Tractor Tune-Up	15-3	Separating Engine From Clutch Housing	27-3
GROUP 20 - LUBRICATION		Separating Clutch Housing From Transmission Case	27-5
Lubrication Chart	20-1	Removing Final Drive Assembly	27-6
Engine Lubricating Oils	20-2	GROUP 30 - SPECIFICATIONS AND SPECIAL TOOLS	
Transmission Hydraulic Oils	20-2	Specifications	30-1
Greases	20-2	Special Tools	30-1
Storing Lubricants	20-2	Torque Chart	30-2

Group 5

GENERAL TRACTOR SPECIFICATIONS (2440)

ENGINE

Maximum PTO horsepower*	60.65 (45.23 kW)
Number of cylinders	4
Bore and stroke	4.02 in. (102 mm) x 4.33 in. (110 mm)
Displacement	219 in. ³ (3590 cm ³)
Compression ratio	16.8 to 1
Firing Order	1-3-4-2
Intake valve clearance	0.014-in. (0.35 mm)
Exhaust valve clearance	0.018-in. (0.46 mm)
Slow idle	800 rpm
Fast idle	2650 rpm

*Official test at 2500 engine rpm (650 or 1210 PTO rpm)

ELECTRICAL SYSTEM

Battery dry voltage	12 volts
Battery specific gravity at full charge (corrected to 80°F [27°C])	1.260
Battery terminal grounded	negative

CAPACITIES

Fuel tank	19-1/2 gals. (73.8 L)
Cooling system	12 qts. (11.4 L)
Crankcase (including filter)	6 qts. (5.7 L)
Transmission-hydraulic system	10 gals. (38 L)
Belt pulley	2-1/2 pts. (0.3 L)

CLUTCH	Single or dual stage, spring-loaded, dry disk, foot-operated.
--------	---

TRANSMISSION

Type Collar shift
 Gear selections 8 forward and 4 reverse
 Shifting 4 speeds each in high, low,
 and reverse ranges. Park
 lock included.

HI-LO SHIFT

Hydraulic wet clutches, no clutching required.
 Shifting from high to low decreases ground speed
 21.4 percent and increases pull power up to 27 per-
 cent in any of the transmission speeds.

REVERSER

Hydraulic wet clutches, no clutching required. Pro-
 vides reverse speeds for gear selections 1 through 4
 which are 16% faster than corresponding forward
 speeds.

BRAKES Hydraulically actuated, wet-
 disk type.

DIFFERENTIAL AND FINAL DRIVES

Type Planetary reduction final
 drives with spiral bevel gear
 drive differential.
 Differential lock Hand or foot-operated me-
 chanical lock, spring-loaded
 out of engagement.

POWER TAKE-OFF

Type Continuous-running or inde-
 pendent types available in
 540 and/or 1000 rpm op-
 tions.

HYDRAULIC SYSTEM

Type Closed center, constant pressure.
 Actuates power steering and implement control.
 Standby oil pressure 2250 psi (15.5 mPa)

STEERING

TYPE Hydraulically actuated, with
 manual provision in case of
 hydraulic failure.

FRONT TIRES (Standard Equipment)* 6.00-16

REAR TIRES (Standard Equipment)* 16.9-28

DIMENSIONS

Over-all height to top of muffler . 81.2 in. (206 cm)
 Over-all height to top of hood ... 55.7 in. (141 cm)
 Over-all width, min. 69.5 in. (177 cm)
 Over-all length
 (with 3-point hitch) 139.5 in. (354 cm)
 Wheelbase (straight axle) 87.8 (218 cm)
 Shipping weight (approx.) .. 4800 lbs. (2 182 kg)

**Additional tire sizes available.*

GROUND SPEEDS
Given in MPH (km/h) with 16.9-28
Rear Tires and 2500 Engine RPM

Gear	Collar Shift Transmission		Hi-Lo Shift Transmission		Ground Speed at Rated PTO SPEED (2100 RPM)					
					"Lo"		"Hi"			
1st	1.53	(2.46)	1.20	(1.93)	1.53	(2.46)	1.01	(1.62)	1.28	(2.06)
2nd	2.18	(3.51)	1.72	(2.77)	2.18	(3.51)	1.44	(2.32)	1.83	(2.95)
3rd	3.24	(5.21)	2.55	(4.10)	3.24	(5.21)	2.14	(3.44)	2.72	(4.38)
4th	4.53	(7.28)	3.56	(5.72)	4.53	(7.28)	2.99	(4.81)	3.80	(6.12)
5th	6.00	(9.65)	4.71	(7.57)	6.00	(9.65)	3.96	(6.37)	5.04	(8.10)
6th	8.57	(13.78)	6.73	(10.82)	8.57	(13.78)	5.66	(9.09)	7.20	(11.57)
7th	12.71	(20.44)	9.99	(16.06)	12.71	(20.44)	8.39	(13.50)	10.68	(17.17)
8th	17.78	(28.59)	13.97	(22.46)	17.78	(28.59)	11.73	(18.86)	14.93	(24.01)
R1	1.78	(2.86)	1.40	(2.25)	1.78	(2.86)	1.17	(1.88)	1.49	(2.40)
R2	2.54	(4.08)	1.99	(3.20)	2.54	(4.08)	1.67	(2.69)	2.13	(3.43)
R3	3.77	(6.06)	2.96	(4.76)	3.77	(6.06)	2.48	(4.00)	3.16	(5.09)
R4	5.26	(8.46)	4.14	(6.66)	5.26	(8.46)	3.47	(5.59)	4.42	(7.11)

Group 7

10

GENERAL TRACTOR SPECIFICATIONS (2640)

ENGINE

Maximum PTO HORSEPOWER* 70.0 (52.2 kW)
Nuner of cylinders 4
Bore and stroke, inches (cm) 4.19 x 5.00
(10.65 x 12.70)
Displacement - cubic inches
(cubic centimeters) 276 (4416)
Compression ratio 16.2 to 1
Firing order 1-3-4-2
Intake valve clearance 0.014-in. (0.36 mm)
Exhaust valve clearance 0.018-in. (0.46 mm)
Slow idle 800 rpm
Fast idle 2650 rpm
Transport speed (foot throttle) 2800 rpm

ELECTRICAL SYSTEM

Battery dry voltage 12 volts
Battery specific gravity at full charge
(corrected to 80°F [27°C]) 1.260
Battery terminal grounded negative

CAPACITIES (U.S. Standard Measures)

Fuel tank 19-1/2 gals. (73.8 L)
Cooling system 12 qts. (11.4 L)
Crankcase (including filter) 9 qts. (8.5 L)
Transmission-hydraulic system 10 gals. (38 L)
Belt pulley 2-1/2 pts. (0.3 L)

CLUTCH Single or dual stage,
spring-loaded, dry
disk, foot-operated.

TRANSMISSION

Type Collar Shift
Gear selections 8 forward and 4 reverse
Shifting 4 speeds each in high, low,
and reverse ranges. Park
lock included.

HI-LO SHIFT

Hydraulic wet clutches, no clutching required.
Shifting from high to low decreases ground speed
21.4 percent and increases pull power up to 27 per-
cent in any of the transmission speeds.

*Factory observed at 2500 engine rpm (650 or 1210
PTO rpm).

REVERSER

Hydraulic wet clutches, no clutching required.
Provides reverse speeds for gear selections 1
through 4 which are 16% faster than corresponding
forward speeds.

BRAKES Hydraulically actuated, wet-
disk type.

DIFFERENTIAL AND FINAL DRIVES

Type Planetary reduction final
drives with spiral bevel gear
drive differential.

Differential lock Hand or foot-operated me-
chanical lock, spring-loaded
out of engagement.

POWER TAKE-OFF

Type Continuous-running or inde-
pendent types available in
540 or 540/1000 rpm op-
tions.

HYDRAULIC SYSTEM

Type Closed center, constant pressure.
Actuates power steering and implement control.
Standby oil pressure 2250 psi (15.5 mPa)

STEERING

TYPE Hydraulically actuated, with
manual provision in case of
hydraulic failure.

FRONT TIRES (Standard Equipment)* 6.00-16

REAR TIRES (Standard Equipment)* 16.9-28

DIMENSIONS

Over-all height to top of muffler . 81.2 in. (206 cm)
Over-all height to top of hood . 55.7 in. (141.5 cm)
Over-all width, min. 69.5 in. (176.5 cm)
Over-all length
(with 3-point hitch) 139.5 in. (354 cm)
Wheelbase (straight axle) 87.8 in. (21.8 m)
Shipping weight (approx.) ... 5100 lbs. (2313 kg)

*Additional tire sizes available.

GROUND SPEEDS
 Given in MPH (Km/h) With 16.9-28
 Rear Tires and 2500 Engine RPM

Gear	Collar Shift Transmission		Hi-Lo Shift Transmission		Ground Speed at Rated PTO SPEED (2100 RPM)					
			"Lo"		"Hi"		"Lo"		"Hi"	
1st	1.56	(2.50)	1.23	(1.98)	1.56	(2.50)	1.03	(1.66)	1.31	(2.10)
2nd	2.23	(3.58)	1.75	(2.81)	2.23	(3.58)	1.47	(2.36)	1.87	(3.00)
3rd	3.30	(5.30)	2.60	(4.17)	3.30	(5.30)	2.18	(3.50)	2.78	(4.45)
4th	4.62	(7.41)	3.63	(5.83)	4.62	(7.41)	3.05	(4.89)	3.88	(6.23)
5th	5.49	(8.82)	4.32	(6.93)	5.49	(8.82)	3.63	(5.82)	4.61	(7.41)
6th	7.85	(12.61)	6.17	(9.91)	7.85	(12.61)	5.18	(8.32)	6.60	(10.59)
7th	11.64	(18.67)	9.16	(14.70)	11.64	(18.67)	7.69	(12.35)	9.77	(15.69)
8th	16.28	(26.14)	12.79	(20.52)	16.28	(26.14)	10.74	(17.24)	13.68	(21.96)
R1	1.81	(2.91)	1.42	(2.28)	1.81	(2.91)				
R2	2.59	(4.15)	2.03	(3.26)	2.59	(4.15)				
R3	3.84	(6.16)	3.02	(4.84)	3.84	(6.16)				
R4	5.37	(8.62)	4.22	(6.77)	5.37	(8.62)				

Group 10

PREDELIVERY, DELIVERY, AND AFTER-SALE SERVICES

PREDELIVERY SERVICE

Because of the shipping factors involved, plus extra finishing touches that are necessary to promote customer satisfaction, proper predelivery service is of prime importance to the dealer.

A tag pointing out the factory-recommended procedure for predelivery service is attached to each new tractor before it leaves the factory.

After completing the factory-recommended dealer checks and services listed on the predelivery tag, remove the tag from the tractor and file it with the shop order for the job. The tag will certify that the tractor has received the proper predelivery service when that portion of the customer's John Deere Delivery Receipt is completed.

Temporary Tractor Storage

Service	Specification	Reference
Check radiator for coolant loss and antifreeze protection	Midway between core and filler neck	
Remove and store batteries	Store at room temperature	
Reduce shipping pressure of tires		Operator's manual
Cover tractor and tires for protection and cleanliness		

Before Delivering Tractor

Electrical System

Remove resistor and connect wiring lead (red) to alternator output terminal. Do not attempt to polarize alternator		Section 40, Group 10
Charge batteries. Check electrolyte level and specific gravity		FOS-20 Manual
Check battery terminal connections		Section 40, Group 5
Check alternator belt tension	3/4-inch (1.9 cm) deflection, 20 lb. (104 N) force	Operator's manual
Check light operation and adjustment. Remove flasher if required by local government regulations		Operator's manual

Service Specification Reference

Before Delivering Tractor—Continued

Cooling System

- Inspect radiator for coolant loss Midway between core and filler neck.....
- Check antifreeze protection

Tires and Wheels

- Adjust pressure of tires Operator's manual
- Check front wheel hub bolts, rear wheel rim clamp nuts, and rear wheel cap screws for tightness Front hub bolts-100 ft-lbs (135 Nm) torque
 Rear hub bolts-300 ft-lbs (407 Nm) torque
 Rim clamp nuts-170 ft-lbs (230 Nm) torque
 Rear wheel-to-flanged axle—130 ft-lbs (176 Nm) torque Operator's manual

Lubrication

- Check crankcase oil level To upper marks on dipstick Operator's manual
- Check transmission-hydraulic system oil level To top of "SAFE" range on dipstick. Hy-GARD Oil Operator's manual
- Lubricate grease fittings John Deere Multi-purpose Lubricant Operator's manual
- Check belt pulley oil level (if so equipped) Operator's manual

Engine

- Check air intake system—air cleaner and hose connections Operator's manual
- Drain sediment from fuel filter Operator's manual
- Fill fuel tank and start engine 19-1/2 U.S. gallons (73.8 liters) Operator's manual
- Check operation of starter, alternator, flashers, gauges, and indicator lights Operator's manual
- Check engine timing TDC Operator's manual
- Check speed control and fuel shut-off linkages for free operation and adjustment Section 30, Group 20

Service Specification Reference

Before Delivering Tractor—Continued

Check engine speeds Slow idle, 800 rpm
 High idle, 2650 rpm
 Foot throttle, 2800 rpm..... Section 30, Group 20

Operation

Check transmission clutch free travel
 (tractors without reverser)..... Approximately 1-inch (2.54 cm) free
 pedal travel Operator's manual

Check clutch wear adjustment (tractors
 with reverser)..... 5-1/4 in. (13.34 cm) from engine
 flange..... Operator's manual

Shift transmission through all speeds Operator's manual

Check power takeoff operation Operator's manual

Check differential lock operation..... Operator's manual

Check steering operation Operator's manual

Check brakes..... Bleed brakes if spongy,
 check for excessive pedal travel,
 and even position..... Operator's manual

Check hydraulic system operation:
 Rockshaft, and remote cylinder Operator's manual

Check 3-point hitch operation Operator's manual

Check negative stop screw adjustment
 Tractors without independent PTO 1/4 turn..... Section 70, Group 30
 Tractors with Independent PTO 1/3 turn..... Section 70, Group 30

Check operation of reverser, or Hi-Lo
 Shift Operator's manual

Check seat operation..... Operator's manual

General

Check Roll-Gard Mounting bolts for
 correct torque..... 300 ft-lbs (407 Nm)..... Section 10, Group 30

Check front axle-to-knee bolts for
 correct torque..... 300 ft-lbs (407 Nm)..... Section 80, Group 5

10 Before Delivering Tractor—Continued

Service	Specifications	Source
Tighten accessible nuts and cap screws		
Clean tractor and touch up paint.....		
Remove covering from SCV emblem		

DELIVERY SERVICE

A thorough discussion of the operation and service of a new tractor at the time of delivery helps to assure complete customer satisfaction. Proper delivery should be an important phase of a dealer's program. A portion of the John Deere Delivery Receipt emphasizes the importance of proper delivery service.

It is a well-known fact that many complaints have arisen simply because the owner was not shown how to operate and service the new tractor properly. Enough time should be devoted, at the customer's convenience, to introducing the new tractor to the owner and explaining how to operate and service it.

The following procedure is recommended before the service technician and owner complete the delivery acknowledgments portion of the delivery receipt.

Using the tractor operator's manual as a guide, be sure that the owner understands these points thoroughly:

1. Controls and Instruments.
2. How to start and stop the engine.
3. The importance of the break-in period.
4. How to use liquid or cast-iron ballast.
5. all functions of the hydraulic system.
6. Using the power takeoff and belt pulley.
7. The importance of safety.
8. The importance of lubrication and periodic services

After explaining and demonstrating the above features, have the owner sign the delivery receipt and give the operator's manual to the owner.

AFTER-SALE INSPECTION

The purchaser of a new John Deere tractor is entitled to a free inspection within the warranty period after the equipment has been "run in." The terms of this after-sale inspection are outlined on the back of the John Deere Delivery Receipt.

The purpose of this inspection is to make sure that the customer is receiving satisfactory performance from the tractor. At the same time, the inspection should reveal whether or not the tractor is being operated, lubricated, and serviced properly.

If the recommended after-sale service inspection is followed, the dealer can eliminate a needless volume of service work by preventing minor irregularities from developing into serious problems later on. This will promote strong dealer-customer relations and present the dealer an opportunity to answer questions that may have arisen during the first few days of operation. During the inspection service, the dealer has the further opportunity of promoting the possible sale of other new equipment.

The following inspection program is recommended within the first 100 hours of tractor operation.

Inspection Procedure

Service	Specification	Reference
Cooling System		
Check radiator coolant level	Midway between core and filler neck	

Inspection Procedure—Continued

Service	Specification	Reference
Clean external surface of radiator core		
Check hoses and connections for leaks		
Fuel System		
Remove water and foreign matter from filter sediment bowl		Operator's manual
Bleed fuel system		Operator's manual
Tighten loose connections and check entire system for leaks. Correct if necessary		
Check air cleaner element and unloading valve. Clean element if necessary		Operator's manual
Electrical System		
Check specific gravity of battery(s)	Full charge - 1.260 at 80°F (27°C) ..	Operator's manual
Check level of battery electrolyte	To bottom of filler neck in each cell	Operator's manual
Check belt tension	3/4-inch (19.1 mm) deflection with a 20 lb. (104 N) force	Operator's manual
Start engine and check operation of starter, lights, and indicator lamps		Operator's manual
Lubrication		
Check crankcase oil level	To upper marks on dipstick	Operator's manual
Check transmission-hydraulic system oil level	In "SAFE" range on dipstick. Use John Deere Hy-GARD	Operator's manual
Engine		
Check valve clearance (static)	Intake: 0.014 in. (0.35 mm) Exhaust: 0.018 in. (0.46 mm)	Operator's manual

10 Inspection Procedure—Continued

Service	Specification	Reference
Check engine speed (under load), and horsepower	Specification	Group 15 of this Section.

Operation

Check transmission clutch free travel (tractors without reverser)	Approximately 1-inch (2.54 cm) free pedal travel	Operator's manual
Check clutch wear adjustment (tractors with reverser)	5-1/4 in. (13.34 cm) from pedal to rear of engine flange	Operator's manual
Shift transmission through all speeds		Operator's manual
Check Reverser, Hi-Lo operation		Operator's manual
Check Power Take-Off operation		Section 50, Groups 35, 40 and 42
Check differential lock operation		Operator's manual
Check rockshaft and remote cylinder operation		Section 70, Group 30
Check negative stop screw adjustment		
Tractors without Independent PTO	1/4 turn	Section 70, Group 30
Tractors with Independent PTO	1/3 turn	Section 70, Group 30
Check steering system operation	Smooth, without excessive freeplay	Section 70, Group 20
Check brakes	Bleed brakes if spongy, check for excessive pedal travel, and even position	Section 70, Group 25

Nuts and Cap Screws

Tighten accessible nuts and cap screws that require adjustment		
--	--	--

Group 15 TUNE-UP

GENERAL INFORMATION

Before tuning up a tractor, determine whether a tune-up will restore operating efficiency. When there is doubt, the following preliminary tests will help to determine if the engine can be tuned-up.

If the condition is satisfactory, proceed with the tune-up. Choose from the following procedures only those necessary to restore the unit.

Preliminary Engine Testing

Operation	Specification	Section-Group Reference
Dynamometer Test (at 2500 engine rpm, full load—650 or 1210 PTO rpm)	Compare with previous recorded output; compare with output after tune-up	FOS 30 Manual, Chapter 12
Compression Test	300 psi (2067 kPa) at full cranking speed	FOS 30 Manual
Engine Coolant Check Test	No air bubbles or oil film in radiator	FOS 30 Manual, Chapter 12

Engine Tune-Up

Operation	Specification	Section-Group Reference
Air Intake System		
Service air cleaner and check system for leaks		FOS 30 Manual, Chapter 12
Check system for restrictions using water manometer		
Normal reading with clean filter element (inches of water)	3-12 inches (8.89 cm)	FOS 30 Manual, Chapter 12
Maximum permitted reading	25 in. (63.5 cm) at 2500 rpm (full load)	FOS 30 Manual, Chapter 12
Exhaust System		
Check system for leaks		FOS 30 Manual, Chapter 12
Check muffler and exhaust pipe for restrictions		FOS 30 Manual, Chapter 12

10 Engine Tune-Up—Continued

Operation	Specification	Section-Group Reference	
		(2440)	(2640)
Crankcase Ventilating System			
Check system for restrictions		FOS 30 Manual, Chapter 12	
Cooling System			
Clean grille screen, radiator core, and oil cooler core		20-35	20-35
Clean and flush system; check thermostat opening temperature, if necessary		20-35	20-35
Check pressure cap	6.25 to 7.50 psi (43 to 52 kPa) release pressure	20-35	20-35
Cylinder Head and Valves			
Torque cylinder head cap screws	110 ft-lbs (149 Nm) in sequence	20-10	20-12
Set valve clearance	Intake-0.014 inch (0.36 mm) Exhaust-0.018 inch (0.46 mm)	20-10	20-12
Fuel System			
Check fuel tank for water or other foreign material			
Check fuel pump pressure	3-1/2 to 4-1/2 psi (24 to 31 kPa) ...	30-15	30-15
Change filter		30-15	30-15
Injection Pump:			
Service and check timing	TDC	30-15	30-15
	4° advance at 1100 rpm (2440) and 1200 rpm (2640) (no load)	30-15	30-15
Adjust speed control linkage	Foot throttle - 2800 rpm Hand throttle High idle - 2650 rpm Slow idle - 800 rpm	30-20	30-20
Lubrication System			
Check engine oil pressure	45 to 65 psi (317 to 448 kPa) at high idle	20-30	20-32
Charging System			
Check battery specific gravity	1.240 to 1.260	40-10	40-10
Check battery water consumption and electrolyte level		40-10	40-10
Clean battery, cables, and box		40-10	40-10
Check alternator belt tension	20 lb. (104 N) with 3/4 in. (19.1 mm) belt deflection	40-10	40-10
Check alternator output	25 amps at 13 to 15 volts (2052 engine rpm, 3000 alternator rpm) ..	40-10	40-10
Check alternator regulated voltage	13.8 to 14.3 volts (operating)	40-10	40-10
Starting System			
Check neutral start switch operation			
Check battery voltage when starting	Min. 9 volts (cranking)	40-15	40-15
Check starter current draw	Approx. 400 amps	40-15	40-15
Check operation of alternator and oil pressure indicator lights		40-25	40-25

Final Engine Test

Operation	Specification	Section-Group Reference
Dynamometer	Compare with previous recorded output. Record for future use.	FOS 30 Manual, Chapter 12

Tractor Tune-Up

Operation	Specification	Section-Group Reference	
		(2440)	(2640)
Adjust transmission clutch pedal free travel			
Tractors without reverser	1 inch (2.54 cm)	50-5	50-5
Tractors with reverser	5-1/4 inches (13.34 cm) from rear of engine flange	50-5	50-5
Check transmission shifting		50-20	50-20
Check transmission for proper operation without excessive noise		50-20	50-20
Check Hi-Lo reverser operation		50-10&15	50-10&15
Check power take off for proper operation		50-35&40	50-35&42
Check differential lock operation		50-25	50-25
Check brake pedal travel and position	Bleed brakes if spongy	70-25	70-25
Check front wheel bearing adjustment and lubrication	35 ft-lbs (47 Nm) torque; back off to nearest hole		
Check front wheel toe-in	1/8 to 3/8 in. (3.2 to 9.5 mm)		
Check tire inflation	See operator's manual		
Transmission pump	6 gpm (0.38 l/s) at 2500 rpm	70-15	70-15
Main hydraulic pump	2200 to 2300 psi (15.2 to 15.8 mPa) standby; 13 gpm (0.82 l/s) or 23 gpm (1.45 l/s)	70-15	70-15
Pressure control valve	1700 to 1800 psi (11.7 to 12.4 mPa) at 1900 engine rpm	70-10	70-10
Rockshaft lift cycle time (60 degrees rotation)	1.5 to 1.6 seconds at 2100 rpm	70-30	70-30
Check selective control valve and remove cylinder cycle time	Remote cylinder (2.5 x 8 in. [6.35 x 14.35 cm]) extends in 1.5 to 2.0 sec. ..	70-35	70-35

Hydraulic system pressures and flow rates are for conditions specified in Section 70 (tractor at operating temperature, transmission-hydraulic oil at correct temperature, proper test equipment, correct test sequence, etc.)

