


963



Service Manual

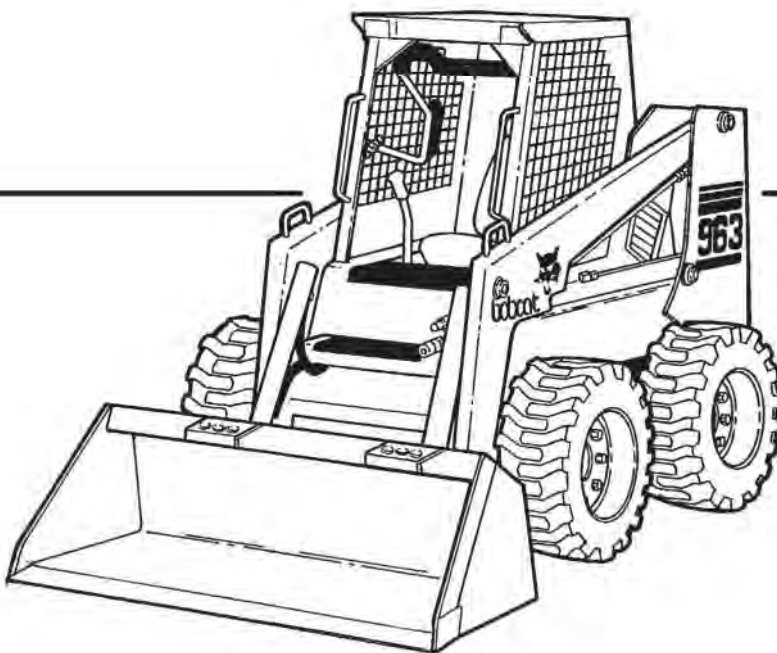

EQUIPPED WITH
BOBCAT INTERLOCK
CONTROL SYSTEM (BICS™)
1 of 500

**MELROE
INGERSOLL-RAND**

6724545 (11-97)

Printed in U.S.A.



© Melroe Company 1997

MAINTENANCE SAFETY



WARNING

Instructions are necessary before operating or servicing machine. Read and understand the Operation & Maintenance Manual, Operator's Handbook and signs (decals) on machine. Follow warnings and instructions in the manuals when making repairs, adjustments or servicing. Check for correct function after adjustments, repairs or service. Untrained operators and failure to follow instructions can cause injury or death.

W-2003-0903



Safety Alert Symbol: This symbol with a warning statement, means: "Warning, be alert! Your safety is involved!" Carefully read the message that follows.


CORRECT



B-10731a

- Never service the Bobcat Skid-Steer Loader without instructions.


CORRECT



B-12365

- Use the correct procedure to lift or lower operator cab.


CORRECT

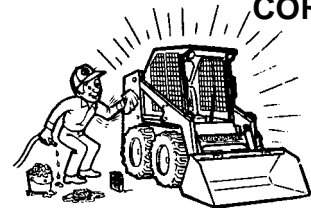

B-7469

- Cleaning and maintenance are required daily.


WRONG

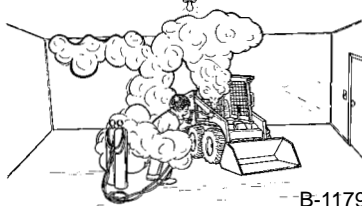

B-11799

- Have good ventilation when welding or grinding painted parts.
- Wear dust mask when grinding painted parts. Toxic dust and gas can be produced.
- Avoid exhaust fume leaks which can kill without warning. Exhaust system must be tightly sealed.


WRONG



B-15231

- Disconnecting or loosening any hydraulic tubeline, hose, fitting, component or a part failure can cause lift arms to drop. Do not go under lift arms when raised unless supported by an approved lift arm support device. Replace it if damaged.


WRONG

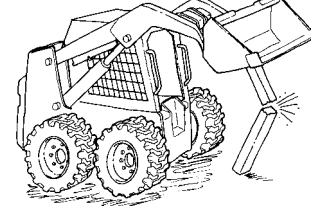

B-15280

- Never work on loader with lift arms up unless lift arms are held by an approved lift arm support device. Replace if damaged.
- Never modify equipment or add attachments not approved by Bobcat Company.


WRONG



B-6590

- Stop, cool and clean engine of flammable materials before checking fluids.
- Never service or adjust loader with the engine running unless instructed to do so in the manual.
- Avoid contact with leaking hydraulic fluid or diesel fuel under pressure. It can penetrate the skin or eyes.
- Never fill fuel tank with engine running, while smoking or when near open flame.

WRONG



B-6580

- Keep body, jewelry and clothing away from moving parts, electrical contact, hot parts and exhaust.
- Wear eye protection to guard from battery acid, compressed springs, fluids under pressure and flying debris when engines are running or tools are used. Use eye protection approved for type of welding.
- Keep rear door closed except for service. Close and latch door before operating the loader.

WRONG



B-6589

- Lead-acid batteries produce flammable and explosive gases.
- Keep arcs, sparks, flames and lighted tobacco away from batteries.
- Batteries contain acid which burns eyes or skin on contact. Wear protective clothing. If acid contacts body, flush well with water. For eye contact flush well and get immediate medical attention.

Maintenance procedures which are given in the Operation & Maintenance Manual can be performed by the owner/operator without any specific technical training. Maintenance procedures which are **not** in the Operation & Maintenance Manual must be performed **ONLY BY QUALIFIED BOBCAT SERVICE PERSONNEL**. Always use genuine Bobcat replacement parts. The Service Safety Training Course is available from your Bobcat dealer.



Bobcat®

ALPHABETICAL INDEX

ACTUATORS	10-1	ELECTRICAL/HYDRAULIC CONTROL REF.	8-1
ACTUATOR VOLTAGE TEST	10-1	ELECTRICAL SYSTEM INFORMATION	6-1
A.H.C. COMPONENTS	10-1	ENGINE	7-1
A.H.C./PWM CONTROLLER	10-1	ENGINE BLOCK	7-1
A.H.C. HANDLE	10-1	ENGINE COOLER	7-1
A.H.C. STEERING LEVER	10-1	ENGINE COOLING SYSTEM	1-1
AIR CLEANER HOUSING	7-1	ENGINE LUBRICATION SYSTEM	1-1
AIR CLEANER SERVICE	1-1	ENGINE MUFFLER	7-1
ALTERNATOR	6-1	ENGINE MOUNTING BRACKET	7-1
ALTERNATOR BELT	1-1	ENGINE OIL COOLER	7-1
AXLE SEAL	4-1	ENGINE SPEED CONTROL	7-1
AXLE, BEARINGS AND SPROCKET	4-1	ENGINE SPECIFICATIONS	9-1
		EXHAUST MANIFOLD	7-1
BATTERY	6-1	FAN DRIVE TENSION PULLEY	7-1
BICS™	8-1, 10-1	FAN GEARBOX	1-1 & 7-1
BICS™ SYSTEM CONTROLLER	8-1	FAN GEARBOX/BLOWER HOUSING	7-1
BICS™ VALVE	2-1, 10-1	FINAL DRIVE TRANSMISSION (CHAINCASE)	1-1
BLOWER FAN	7-1	FLYWHEEL	7-1
BOB-TACH	5-1	FRONT CHAINCASE COVER	4-1
BOSS DIAGNOSTIC TOOL	8-1	FRONT FUEL TANK	5-1
BOSS INSTRUMENT PANEL	8-1	FRONT LIGHTS	6-1
BOSS UNIT	8-1	FRONT SIDE PANEL	2-1
BRAKE/TWO SPEED BLOCK	4-1	FUEL INJECTOR NOZZLE	7-1
BUCKET POSITION VALVE	2-1	FUEL INJECTION PUMP	7-1
		FUEL LIFT PUMP	7-1
		FUEL SYSTEM	1-1
CAMSHAFT AND TAPPETS	7-1	HANDLE CONTROL UNIT	10-1
CHAINCASE FLUID	4-1	HANDLE CONTROL UNIT TEST	10-1
COOLANT RECOVERY TANK	7-1	HYDRAULIC CONTROL VALVE	2-1, 10-1
COOLING SYSTEM	7-1	HYDRAULIC CONNECTION SPECIFICATONS	9-1
CONTROL PANEL	3-1	HYDRAULIC CYLINDER	2-1
CONTROL PEDALS	2-1	HYDRAULIC/HYDROSTATIC FILTER	2-1
CONTROL PEDALS MOUNTING PANEL	2-1	HYDRAULIC/HYDROSTATIC FLUID SPEC.	9-1
CRANKSHAFT AND BEARINGS	7-1	HYDRAULIC FLUID RESERVOIR	2-1
CYLINDER HEAD	7-1	HYDRAULIC PUMP	2-1
		HYDRAULIC SYSTEM INFORMATION	2-1
DECIMAL & MILLIMETER EQUIVALENTS	9-1	HYDRAULIC/HYDROSTATIC SYSTEM	1-1
DRIVE BELT	3-1	HYDROSTATIC CONTROLLER	3-1
DRIVE BELT IDLER PULLEY	3-1	HYDROSTATIC MOTOR	3-1
DRIVE BELT SHIELD	3-1	HYDROSTATIC MOTOR COVER	3-1
DRIVE BELT TENSIONER PULLEY	3-1	HYDROSTATIC PUMP	3-1
DRIVE CHAINS	4-1	HYDROSTATIC SYSTEM INFORMATION	3-1
		INTAKE MAINIFOLD	7-1
		LIFT ARMS	5-1
		LIFT ARM BY-PASS CONTROL VALVE	2-1
		LIFT ARM SUPPORT DEVICE	1-1
		LIFT CYLINDER(S)	2-1
		LIFTING AND BLOCKING THE LOADER	1-1
		LOADER SPECIFICATIONS	9-1
		LOADER TORQUE	9-1
		LUBRICATING THE LOADER	1-1
		LUBRICATION SYSTEM	7-1
		MAIN RELIEF VALVE	2-1
		MONITOR SERVICE CODES	8-1

A.H.C.—ADVANCED HAND CONTROL SYSTEM
 BICS—BOBCAT INTERLOCK CONTROL SYSTEM
 BOSS—BOBCAT OPERATION SENSING SYSTEM
 PWM—PULSE WITH MODULATION

Cont'd On Next Page

ALPHABETICAL INDEX (Cont'd)

OIL COOLER	3-1
OPERATION SENSING SYSTEM UNIT	8-1
OPERATOR CAB	1-1 & 5-1
OPERATOR CAB GAS CYLINDER	5-1
OPERATOR SEAT	5-1
PARKING BRAKE	4-1
PARKING BRAKE PEDAL	4-1
PEDAL INTERLOCK LINKAGE	2-1
PISTONS AND CONNECTING RODS	7-1
PWM CONTROL HANDLE	8-1
PWM ELECTRIC SOLENOID	8-1
PWM MODULE	8-1
PWM TROUBLESHOOTING	8-1
RADIATOR	7-1
REAR CHAINCASE COVER	4-1
REAR DOOR	5-1
REAR FUEL TANK	5-1
REAR GRILL	5-1
REDUCTION GEARCASE	4-1
RELAY SWITCHES	6-1
REMOTE START SWITCH	1-1
ROCKER SHAFT	7-1
RPM SENSOR	8-1
SEAT BAR	5-1
SEAT BAR RESTRAINT SYSTEM	1-1
SEAT BAR SENSOR	8-1
SEAT SENSOR	8-1
SENDER AND SENSOR	8-1
SERVICE CODES	8-1
SERVICE SCHEDULE	1-1
STANDARD INSTRUMENT PANEL	6-1
STARTER	6-1
STEERING LEVERS	3-1
STEERING LINKAGE	3-1
SWITCH HANDLE	10-1
SYSTEM ANALYSIS	8-1
TILT CYLINDER(S)	2-1
TILT JUNCTION BLOCK	2-1
TIMING CASE AND DRIVE ASSEMBLY	7-1
TIRE MAINTENANCE	1-1
TOWING THE LOADER	1-1
TRACTION LOCK	8-1
TRANSPORTING THE LOADER	1-1
TRUBLESHOOTING	2-1, 3-1, 6-1, 7-1 & 8-1
TRUBLESHOOTING (A.H.C.)	10-1
TURBOCHARGER	7-1
VALVE CLEARANCE	7-1
VALVE, VALVE GUIDE AND SPRINGS	7-1
U.S. TO METRIC CONVERSION	9-1

CONTENTS

FOREWORD	ii
SAFETY INSTRUCTIONS	v
SERIAL NUMBER LOCATIONS	vii
DELIVERY REPORT	vii
BOBCAT LOADER IDENTIFICATION	viii
PREVENTIVE MAINTENANCE	1-1
HYDRAULIC SYSTEM	2-1
HYDROSTATIC SYSTEM	3-1
DRIVE SYSTEM	4-1
MAIN FRAME	5-1
ELECTRICAL SYSTEM	6-1
ENGINE SERVICE	7-1
SYSTEM ANALYSIS	8-1
SPECIFICATIONS	9-1
ADVANCED HAND CONTROL SYSTEM	10-1

CALIFORNIA PROPOSITION 65 WARNING

Diesel engine exhaust and some of its constituents are known to the State of California to cause cancer, birth defects and other reproductive harm.

**PREVENTIVE
MAINTENANCE**

**HYDRAULIC
SYSTEM**

**HYDROSTATIC
SYSTEM**

**DRIVE
SYSTEM**

**MAIN
FRAME**

**ELECTRICAL
SYSTEM**

**ENGINE
SERVICE**

**SYSTEMS
ANALYSIS**

SPECIFICATIONS


**ADVANCED
HAND CONTROL
SYSTEM**

FOREWORD


This manual is for the Bobcat loader mechanic. It provides necessary servicing and adjustment procedures for the Bobcat loader and its component parts and systems. Refer to the Operation & Maintenance Manual for operating instructions, starting procedure, daily checks, etc.

A general inspection of the following items must be made after the loader has had service or repair:


1. Check that the ROPS/FOPS (Including sidescreens) is in good condition and is not modified.




2. Check that ROPS mounting hardware is tightened and is Melroe approved.




3. The seat belt must be correctly installed, functional and in good condition.



4. The seat bar and pedal interlocks must be correctly adjusted, clean and lubricated.




5. Check lift arm support device, replace if damaged.



6. Machine signs must be legible and in the correct location.



7. Steering levers and foot pedals must return to neutral.




8. Check for correct function of the work lights.




9. The parking brake must function correctly.




10. Enclosure door latches must open and close freely.




11. Bob-Tach wedges and linkages must function correctly and be in good condition.




12. Safety treads must in good condition.




13. Check for correct function of indicator lamps (Optional on some models).



14. Check hydraulic fluid level, engine oil level and fuel supply.




15. Inspect for fuel, oil or hydraulic fluid leaks.




16. Lubricate the loader.




17. Check the condition of the battery and cables.




18. Inspect the air cleaner for damage or leaks. Check the condition of the element.




19. Check the electrical charging system.




20. Check tires for wear and pressure.



21. Inspect for loose or broken parts or connections.




22. Operate the loader and check all functions.




23. Check for any field modification not completed.



24. Check for correct function of the Bobcat Interlock Control System (BICS™) before the machine is returned to the customer.



Recommend to the owner that all necessary corrections be made before the machine is returned to service.





SAFETY INSTRUCTIONS

WARNING

Instructions are necessary before operating or servicing machine. Read and understand the Operation & Maintenance Manual, Handbook and signs (decals) on machine. Follow warnings and instructions in the manuals when making repairs, adjustments or servicing. Check for correct function after adjustments, repairs or service. Untrained operators and failure to follow instructions can cause injury or death.

W-2003-0299

The following publications provide information on the safe use and maintenance of the loader and attachments:

- The Delivery Report is used to assure that complete instructions have been given to the new owner and that the machine is in safe operating condition.
- The Operation & Maintenance Manual delivered with the loader gives operating information as well as routine maintenance and service procedures. It is a part of the loader and must stay with the machine when it is sold. Replacement Operation & Maintenance Manuals can be ordered from your Bobcat loader dealer.
- The loader has machine signs (decals) which instruct on the safe operation and care. The signs and their locations are shown in the Operation & Maintenance Manual. Replacement signs are available from your Bobcat loader dealer.
- The loader has a plastic Operator's Handbook fastened to the operator cab. Its brief instructions are convenient to the operator. The Handbook is available from your dealer in an English edition or one of many other languages. See your Bobcat dealer for more information on translated versions.
- The EMI Safety Manual (available in Spanish) delivered with the loader gives general safety information.
- The Service Manual and Parts Manual are available from your dealer for use by mechanics to do shop-type service and repair work.
- The Skid-Steer Loader Operator Training Course is available through your local dealer. This course is intended to provide rules and practices for correct operation of the Bobcat loader. The course is available in English and Spanish version.
- The Service Safety Training Course is available from your Bobcat dealer. This course provides information for safe and correct service procedures for Bobcat Skid-Steer loaders.
- The Bobcat Skid-Steer Loader Safety Video is available from your Bobcat Dealer.

WARNING

Warnings on the machine and in the manuals are for your safety. Failure to obey warnings can cause injury or death.

W-2044-1285

IMPORTANT

This notice identifies procedures which must be followed to avoid damage to the machine.

I-2019-0284



Safety Alert Symbol: This symbol with a warning statement, means: "Warning, be alert! Your safety is involved!" Carefully read the message that follows.

FIRE PREVENTION

The loader has several components that are at high temperature under normal operating conditions. The primary source of high temperatures is the engine and exhaust system. The electrical system, if damaged or incorrectly maintained, can be a source of arcs or sparks.

Flammable debris (leaves, straw, etc.) must be removed regularly. If flammable debris is allowed to accumulate, it will increase the fire hazard. The loader must be cleaned as often as necessary to avoid this accumulation. Flammable debris in the engine compartment is a fire hazard when the loader is parked with a hot engine.

The exhaust system is designed to control the emission of hot particles from the engine and exhaust system, but the muffler and the exhaust gases are still hot.

- Do not use the Bobcat loader where exhaust, arcs, sparks or hot components can contact flammable material, explosive dust or gases.
- The engine compartment and engine cooling system must be inspected every day and cleaned if necessary to prevent fire hazard and overheating.
- Check all electrical wiring and connections for damage. Keep the battery terminals clean and tight. Repair or replace any damaged part.
- Check fuel and hydraulic tubes, hoses and fittings for damage and leakage. Never use open flame or bare skin to check for leaks. Tighten or replace any parts that show leakage. Always clean fluid spills. Do not use gasoline or diesel fuel for cleaning parts. Use commercial nonflammable solvents.
- Do not use ether or starting fluids on this engine. It has a glow plug. These starting aids can cause explosion and injure you or bystanders.
- Always clean the loader and disconnect the battery before doing any welding. Cover rubber hoses, battery and all other flammable parts. Keep a fire extinguisher near the loader when welding. Have good ventilation when grinding or welding painted parts. Wear dust mask when grinding painted parts. Toxic dust or gas can be produced.
- Stop the engine and let it cool before adding fuel. No smoking!
- Use the procedure in the Operation & Maintenance Manual for connecting the battery.
- Use the procedure in the Operation & Maintenance Manual for cleaning the spark arrestor muffler.
- Know where fire extinguishers and first aid kits are located and how to use them.

A fire extinguisher is available from your local dealer. The fire extinguisher can be installed in the location shown **[A]**.




SERIAL NUMBER LOCATIONS

Always use the serial number of the loader when requesting service information or when ordering parts. Early or later models (identification made by serial number) may use different parts, or it may be necessary to use a different procedure in doing a specific service operation.

LOADER SERIAL NUMBER

The loader serial number plate is located on the inside of the left upright, above the grill **[A]**.



Explanation of loader Serial Number:

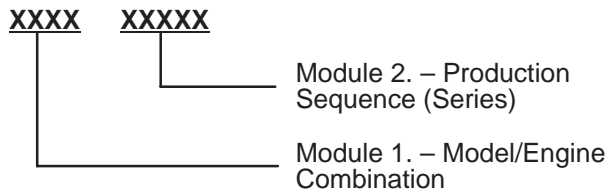

1. The four digit Model/Engine Combination Module number identifies the model number and engine combination.
2. The five digit Production Sequence Number identifies the order which the loader is produced.

ENGINE SERIAL NUMBER

The serial number is on the engine block just above the fuel injection pump **[B]**.

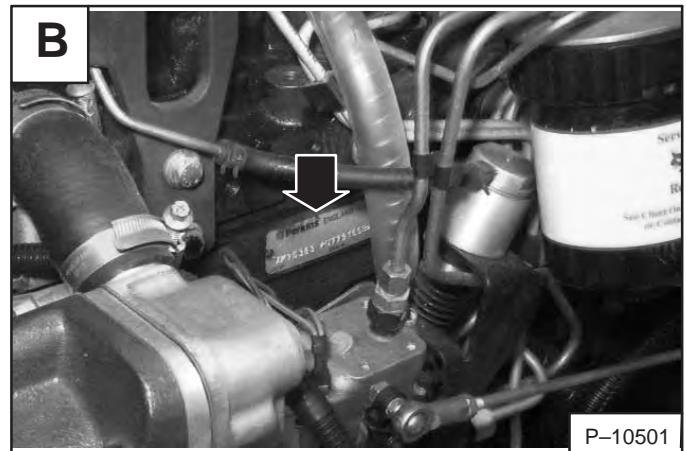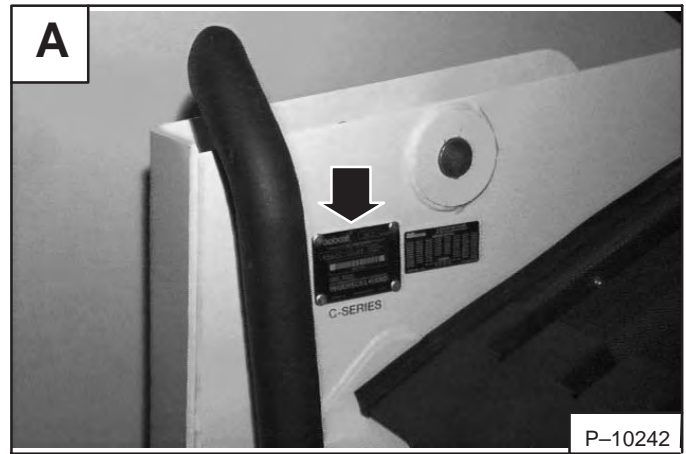

DELIVERY REPORT



The Delivery Report must be filled out by the dealer and signed by the owner or operator when the Bobcat loader is delivered. An explanation of the form must be given to the owner. Make sure it is filled out completely **[C]**.

C

DELIVERY REPORT

WARNING

963 BOBCAT LOADER IDENTIFICATION

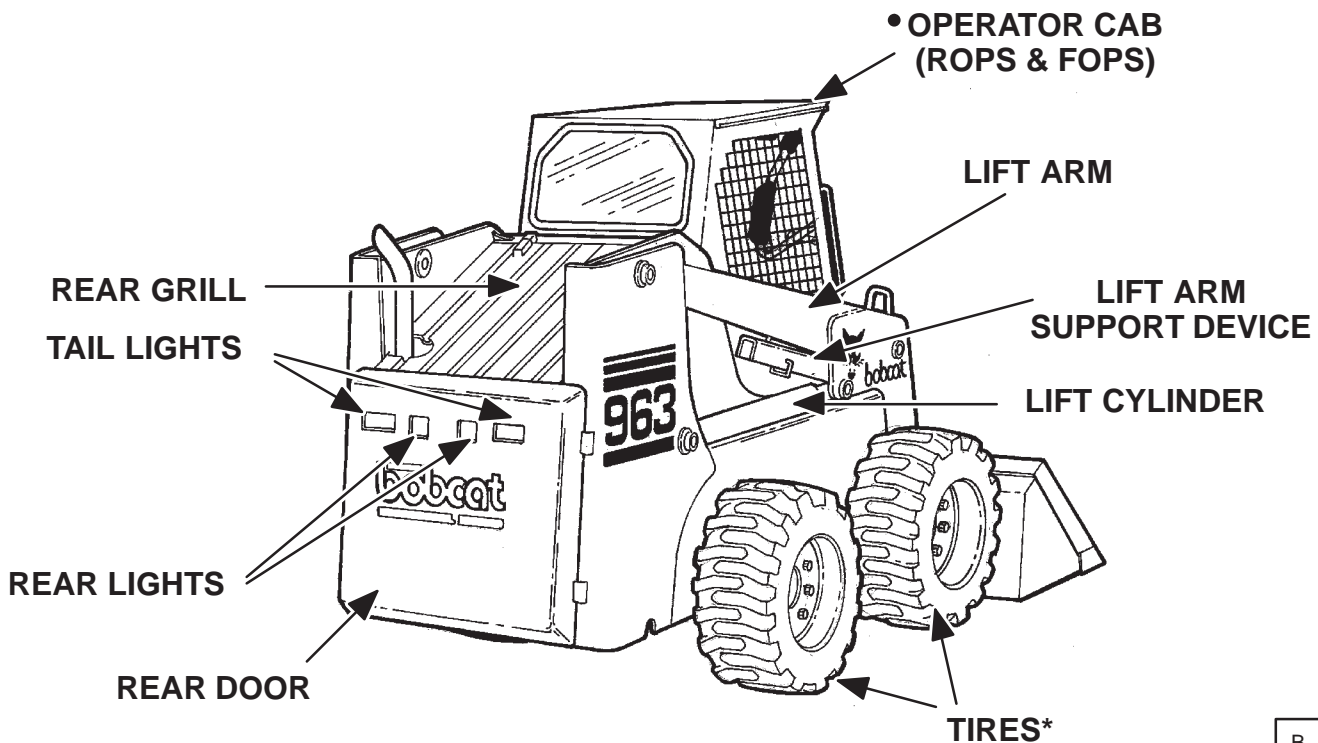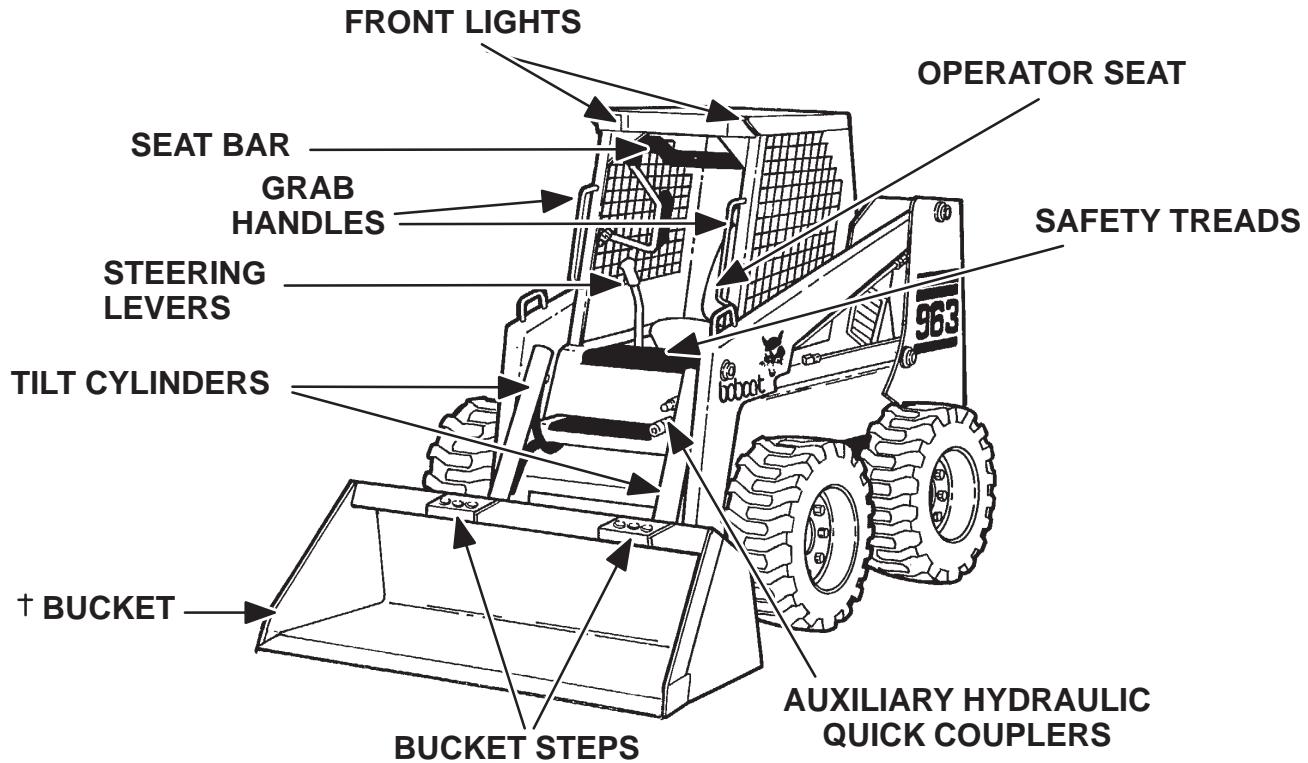

B-15004
B-15005

* TIRES – Flotation tires (optional) are shown. The Bobcat loader is factory equipped with standard tires.

† BUCKET – Several different buckets and other attachments are available for the Bobcat loader.

• ROPS, FOPS – Roll Over Protective Structure, Falling Object Protective Structure, per SAE J1040 and ISO 3471, and Falling Object Protective Structure per SAE J1043 and ISO 3449, Level I. Level II is available. The Bobcat loader is base-equipped with a standard operator cab as shown. Extra insulated cab is available as an option (Reduced noise level).

PREVENTIVE MAINTENANCE

PREVENTIVE MAINTENANCE

	Page Number
AIR CLEANER SERVICE	
Replacing Filter Elements	1-13
ALTERNATOR BELT	
Adjusting The Alternator Belt	1-20
BOB-TACH	
Inspection And Maintenance	1-28
ENGINE COOLING SYSTEM	
Cleaning The Cooling System	1-18
Checking The Coolant Level	1-18
Replacing The Coolant	1-19
ENGINE LUBRICATION SYSTEM	
Checking Engine Oil	1-17
Replacing The Oil and Filter	1-17
FAN GEAR BOX	
Checking And Maintaining	1-25
FINAL DRIVE TRANSMISSION (CHAINCASE)	
Checking And Adding Oil	1-25
FUEL SYSTEM	
Filling The Fuel Tank	1-15
Fuel Filters	1-16
Fuel Specifications	1-15
Removing Air From The Fuel System	1-16
HYDRAULIC/HYDROSTATIC SYSTEM	
Checking And Adding Fluid	1-21
Hydraulic/Hydrostatic Filter Replacement	1-21
Replacing The Hydraulic Fluid	1-22
LIFT ARM SUPPORT DEVICE	
Disengaging The Lift Arm Support Device	1-8
Engaging The Lift Arm Support Device	1-7
LIFTING AND BLOCKING THE LOADER	
Procedure	1-4
LUBRICATING THE LOADER	
Procedure	1-26
OPERATOR CAB	
Description	1-9
Emergency Exit	1-11
Lowering The Operator Cab	1-10
Raising The Operator Cab	1-9
REMOTE START SWITCH	
Procedure	1-29

Continued On Next Page

PREVENTIVE MAINTENANCE (Cont'd)

	Page Number
SEAT BAR RESTRAINT SYSTEM	
Description	1-12
Inspecting The Seat Bar	1-12
Maintaining The Seat Bar	1-12
SERVICE SCHEDULE	
Chart	1-3
SPARK ARRESTOR MUFFLER	
Cleaning Procedure	1-23
TIRE MAINTENANCE	
Tire Mounting	1-24
Tire Rotation	1-24
Wheel Nuts	1-24
TOWING THE LOADER	
Procedure	1-6
TRANSPORTING THE LOADER	
Procedure	1-5

SERVICE SCHEDULE

Chart

Maintenance work must be done at regular intervals. Failure to do so will result in excessive wear and early failures. The service schedule is a guide for correct maintenance of the Bobcat loader.



WARNING

Instructions are necessary before operating or servicing machine. Read and understand Operation & Maintenance Manual, Handbook and signs (decals) on machine. Follow warnings and instructions in the manuals when making repairs, adjustments or servicing. Check for correct function after adjustments, repairs or service. Untrained operators and failure to follow instructions can cause injury or death.

W-2003-0199

SERVICE SCHEDULE		HOURS					
ITEM	SERVICE REQUIRED	8-10	50	100	250	500	1000
Engine Oil	Check the oil level and add oil as needed. Do not overfill.						
Air Filter	Check condition indicator. Service only when required.						
Engine Air System	Check for leaks and damaged components.						
Engine Cooling System	Clean debris from oil cooler, radiator and grill. Check coolant level cold in recovery tank. Add premixed coolant as needed.						
Primary Fuel Filter	Remove trapped water.						
Lift Arms, Cylinders, Bob-Tach Pivot Pins & Wedges	Lubricate with multi-purpose lithium based grease (14 places).						
Seat Belt, Seat Bar and Pedal Interlocks	Check the condition of seat belt. Check the seat bar and pedal interlocks for correct operation. Clean dirt and debris from moving parts.						
Bobcat Interlock Control System (BICS™)	Check BICS™ functions. Clean dirt, debris or objects from under or behind seat as required.						
Tires	Check for damaged tires and correct air pressure.						
Safety Signs & Safety Tread	Check for damaged signs (decals) and safety tread. Replace any signs or safety treads that are damaged or worn.						
Operator Cab	Check the fastening bolts, washers and nuts. Check the condition of cab. Remove debris from the pedal area through the clean-out holes.						
Hydraulic Fluid, Hoses and Tubelines	Check fluid level and add as needed. Check for damage and leaks. Repair and replace as needed.						
Final Drive Transmission (Chaincase)	Check oil level and add as needed.						
Control Pedals & Steering	Check for correct operation. Repair or adjust as needed.						
Wheel Nuts	<input type="checkbox"/> Check for loose wheel nuts and tighten to 320–350 ft.-lbs. (434–475 Nm) torque.						
Spark Arrestor Muffler	Clean the spark chamber.						
Battery	Check battery for damage, hold down, cables, connections and electrolyte level. Add distilled water as needed.						
Steering Shaft	Grease two fittings on the steering cross-shaft.						
Engine/Hydro. Drive Belt	* Check belt tension.						
Alternator Belt	Check tension and adjust as needed.						
Fan Drive Gearbox	Check gear lubrication level.						
Engine Oil and Filter	† Replace oil and filter. Use CD or better grade oil and Melroe filter.						
Fuel Filters	Replace filter elements.						
Hydraulic Reservoir Breather Cap	Replace the reservoir breather cap.						
Hyd./Hydro. Filter	• Replace the filter element.						
Hydraulic Reservoir	Replace the fluid.						
Final Drive Transmission	Replace the oil in the chaincase.						
Bobcat Interlock Control System (BICS™)	Check lift arm by-pass control.						

☐ Check wheel nut torque every 8 hours for the first 24 hours.

• Also replace hydraulic/hydrostatic filter element when the transmission warning light comes ON.

■ Or every 12 months.

* Check every 8 hours for the first 40 hours of operation.

† First oil and filter change must occur at 50 hours.

Dear

**Thanks very much for your visiting and
patience.**

Want to get more information,

Please click here, Go back to the page.

**After your payment, you will have instant access to
your download.**

The Download Link will also be sent to your e-mail.

You will get the complete manual

Have any questions

please write to me

admin@servicemanualperfect.com