

1150G Crawlers Service Manual Table of Contents

Description	Section No.	Form No.
General	Tab 1	
Standard Torque Specifications	1001	8-71601
Fluid and Lubricant Specifications	1002	7-62591
Loctite Product Chart		8-98901
Engines	Tab 2	
Engine Removal and Installation	2001	7-64740
Engine Stall Tests	2002	7-62601
Specification Details	2401	8-26064
Cylinder Head and Valve Train	2415	8-26074
Cylinder Block	2425	8-26085
Lubrication System	2445	8-26093
Cooling System	2455	8-26104
Turbocharger	2465	8-26111
Turbocharger Failure Analysis	2565	9-78235
Fuel System	Tab 3	
Fuel System and Filters	3410	8-26132
Fuel Injectors	3413	8-26153
Injection Pump - Bosch	3412	8-26144
Electrical	Tab 4	
Electrical Schematics and Troubleshooting	4002	7-62610
Batteries	4003	8-12351
Instrument Panel and Gauges	4004	7-65460
Alternator	4005	7-65620
Starter and Starter Solenoid	4006	7-48331
Tracks	Tab 5	
Undercarriage Fundamentals	5001	8-99831
Inspection of Track System Components	5501	7-65510
Case Lubricated Track	5504	7-48561
Sealed Track	5505	7-65560
Track Frame and Suspension	5507	7-65540
Idler, Track Adjuster and Recoil Housing	5508	7-65610
Sprocket	5509	8-10911
Carrier Roller	5510	8-14571
Track Roller	5511	8-14581

CASE CORPORATION
700 State Street
Racine, WI 53404 U.S.A.

CASE CANADA CORPORATION
3350 South Service Road
Burlington, ON L7N 3M6 CANADA

Rac 7-63720

© 1996 Case Corporation
Printed in U.S.A.
March, 1996

Description	Section No.	Form No.
Power Train	Tab 6	
Transmission Removal and Installation	6001	7-64760
Specifications, Schematics and Troubleshooting	6002	7-62621
Charging Pump	6005	9-67862
Transmission Control Valve	6007	7-65860
Torque Converter and Torque Converter Housing	6010	7-65600
Transmission	6016	7-64770
Final Drive	6017	7-63760
Brakes	Tab 7	
Removal and Installation of Brake Valve and Removing Air From the Brake System	7001	8-19081
Brake Valve	7002	7-48581
Brakes	7003	7-64780
Hydraulics	Tab 8	
Specifications, Troubleshooting and Schematics	8002	7-62630
Cleaning the Hydraulic System	8003	8-14711
Dozer Control Valve	8007	7-63820
Cylinders	8008	7-64800
Mounted Equipment	Tab 9	
Pedals and Levers	9001	7-62641
Air Conditioning Troubleshooting	9002	7-64810
Air Conditioning Gauges and Testing	9003	7-64820
Air Conditioning System Service	9004	7-64830
Air Conditioner System Component Servicing	9005	7-64840
Dozer Blade	9020	7-64850
Ripper	9030	7-65450
ROPS Cab and Canopy	9061	7-48521
Suspension Seat	9063	7-48531

Section 1001

STANDARD TORQUE SPECIFICATIONS

CASE CORPORATION
700 State Street
Racine, WI 53404 U.S.A.

CASE CANADA CORPORATION
3350 South Service Road
Burlington, ON L7N 3M6 CANADA

Rac 8-71601

© 1994 Case Corporation
Printed in U.S.A.
Issued November, 1991

TABLE OF CONTENTS

TORQUE SPECIFICATIONS - DECIMAL HARDWARE	2
TORQUE SPECIFICATIONS - METRIC HARDWARE	3
TORQUE SPECIFICATIONS - STEEL HYDRAULIC FITTINGS	4
TORQUE SPECIFICATIONS - STEEL HYDRAULIC FITTINGS	5

TORQUE SPECIFICATIONS - DECIMAL HARDWARE

Use the torques in this chart when special torques are not given. These torques apply to fasteners with both UNC and UNF threads as received from suppliers dry, or when lubricated with engine oil. Not applicable if special graphities, Molydisulfide greases, or other extreme pressure lubricants are used.

Grade 5 Bolts, Nuts, and Studs		
		
Size	Pound-Inches	Newton metres
1/4 inch	108 to 132	12 to 15
5/16 inch	204 to 252	23 to 28
3/8 inch	420 to 504	48 to 57
Size	Pound-Feet	Newton metres
7/16 inch	54 to 64	73 to 87
1/2 inch	80 to 96	109 to 130
9/16 inch	110 to 132	149 to 179
5/8 inch	150 to 180	203 to 244
3/4 inch	270 to 324	366 to 439
7/8 inch	400 to 480	542 to 651
1.0 inch	580 to 696	787 to 944
1-1/8 inch	800 to 880	1085 to 1193
1-1/4 inch	1120 to 1240	1519 to 1681
1-3/8 inch	1460 to 1680	1980 to 2278
1-1/2 inch	1940 to 2200	2631 to 2983

Grade 8 Bolts, Nuts, and Studs		
		
Size	Pound-Inches	Newton metres
1/4 inch	144 to 180	16 to 20
5/16 inch	288 to 348	33 to 39
3/8 inch	540 to 648	61 to 73
Size	Pound-Feet	Newton metres
7/16 inch	70 to 84	95 to 114
1/2 inch	110 to 132	149 to 179
9/16 inch	160 to 192	217 to 260
5/8 inch	220 to 264	298 to 358
3/4 inch	380 to 456	515 to 618
7/8 inch	600 to 720	814 to 976
1.0 inch	900 to 1080	1220 to 1465
1-1/8 inch	1280 to 1440	1736 to 1953
1-1/4 inch	1820 to 2000	2468 to 2712
1-3/8 inch	2380 to 2720	3227 to 3688
1-1/2 inch	3160 to 3560	4285 to 4827
NOTE: Use thick nuts with Grade 8 bolts.		

**Thanks very much for your reading,
Want to get more information,
Please click here, Then get the complete
manual**

JustClickHere 

NOTE:

**If there is no response to click on the link above,
please download the PDF document first, and then
click on it.**

**Have any questions please write to me:
admin@servicemanualperfect.com**

TORQUE SPECIFICATIONS - METRIC HARDWARE

Use the following torques when specifications are not given.

These values apply to fasteners with coarse threads as received from supplier, plated or unplated, or when lubricated with engine oil. These values do not apply if graphite or Molydisulfide grease or oil is used.

Grade 8.8 Bolts, Nuts, and Studs		
		
Size	Pound-Inches	Newton metres
M4	24 to 36	3 to 4
M5	60 to 72	7 to 8
M6	96 to 108	11 to 12
M8	228 to 276	26 to 31
M10	456 to 540	52 to 61
Size	Pound-Feet	Newton metres
M12	66 to 79	90 to 107
M14	106 to 127	144 to 172
M16	160 to 200	217 to 271
M20	320 to 380	434 to 515
M24	500 to 600	675 to 815
M30	920 to 1100	1250 to 1500
M36	1600 to 1950	2175 to 2600

Grade 10.9 Bolts, Nuts, and Studs		
		
Size	Pound-Inches	Newton metres
M4	36 to 48	4 to 5
M5	84 to 96	9 to 11
M6	132 to 156	15 to 18
M8	324 to 384	37 to 43
Size	Pound-Feet	Newton metres
M10	54 to 64	73 to 87
M12	93 to 112	125 to 150
M14	149 to 179	200 to 245
M16	230 to 280	310 to 380
M20	450 to 540	610 to 730
M24	780 to 940	1050 to 1275
M30	1470 to 1770	2000 to 2400
M36	2580 to 3090	3500 to 4200

Grade 12.9 Bolts, Nuts, and Studs



Usually the torque values specified for grade 10.9 fasteners can be used satisfactorily on grade 12.9 fasteners.

TORQUE SPECIFICATIONS - STEEL HYDRAULIC FITTINGS

Tube OD Hose ID	Thread Size	Pound- Inches	Newton metres
37 Degree Flare Fitting			
1/4 inch 6.4 mm	7/16-20	72 to 144	8 to 16
5/16 inch 7.9 mm	1/2-20	96 to 192	11 to 22
3/8 inch 9.5 mm	9/16-18	120 to 300	14 to 34
1/2 inch 12.7 mm	3/4-16	180 to 504	20 to 57
5/8 inch 15.9 mm	7/8-14	300 to 696	34 to 79
Tube OD Hose ID	Thread Size	Pound- Inches	Newton metres
3/4 inch 19.0 mm	1-1/16-12	40 to 80	54 to 108
7/8 inch 22.2 mm	1-3/16-12	60 to 100	81 to 135
1.0 inch 25.4 mm	1-5/16-12	75 to 117	102 to 158
1-1/4 inch 31.8 mm	1-5/8-12	125 to 165	169 to 223
1-1/2 inch 38.1 mm	1-7/8-12	210 to 250	285 to 338

Tube OD Hose ID	Thread Size	Pound- Inches	Newton metres
Straight Threads with O-ring			
1/4 inch 6.4 mm	7/16-20	144 to 228	16 to 26
5/16 inch 7.9 mm	1/2-20	192 to 300	22 to 34
3/8 inch 9.5 mm	9/16-18	300 to 480	34 to 54
1/2 inch 12.7 mm	3/4-16	540 to 804	57 to 91
Tube OD Hose ID	Thread Size	Pound- Inches	Newton metres
5/8 inch 15.9 mm	7/8-14	58 to 92	79 to 124
3/4 inch 19.0 mm	1-1/16-12	80 to 128	108 to 174
7/8 inch 22.2 mm	1-3/16-12	100 to 160	136 to 216
1.0 inch 25.4 mm	1-5/16-12	117 to 187	159 to 253
1-1/4 inch 31.8 mm	1-5/8-12	165 to 264	224 to 357
1-1/2 inch 38.1 mm	1-7/8-12	250 to 400	339 to 542

Split Flange Mounting Bolts		
Size	Pound- Inches	Newton metres
5/16-18	180 to 240	20 to 27
3/8-16	240 to 300	27 to 34
7/16-14	420 to 540	47 to 61
Size	Pound- Feet	Newton metres
1/2-13	55 to 65	74 to 88
5/8-11	140 to 150	190 to 203

TORQUE SPECIFICATIONS - STEEL HYDRAULIC FITTINGS

Nom. SAE Dash Size	Tube OD	Thread Size	Pound- Inches	Newton metres	Thread Size	Pound- Inches	Newton metres
O-ring Face Seal End					O-ring Boss End Fitting or Lock Nut		
-4	1/4 inch 6.4 mm	9/16-18	120 to 144	14 to 16	7/16-20	204 to 240	23 to 27
-6	3/8 inch 9.5 mm	11/16-16	216 to 240	24 to 27	9/16-18	300 to 360	34 to 41
-8	1/2 inch 12.7 mm	13/16-16	384 to 480	43 to 54	3/4-16	540 to 600	61 to 68
					Thread Size	Pound- Inches	Newton metres
-10	5/8 inch 15.9 mm	1-14	552 to 672	62 to 76	7/8-14	60 to 65	81 to 88
Nom. SAE Dash Size	Tube OD	Thread Size	Pound- Inches	Newton metres	1-1/16-12	85 to 90	115 to 122
					1-3/16-12	95 to 100	129 to 136
-12	3/4 inch 19.0 mm	1-3/16-12	65 to 80	90 to 110	1-5/16-12	115 to 125	156 to 169
-14	7/8 inch 22.2 mm	1-3/16-12	65 to 80	90 to 110	1-5/8-12	150 to 160	203 to 217
-16	1.0 inch 25.4 mm	1-7/16-12	92 to 105	125 to 140	1-7/8-12	190 to 200	258 to 271
-20	1-1/4 inch 31.8 mm	1-11/16-12	125 to 140	170 to 190			
-24	1-1/2 inch 38.1 mm	2-12	150 to 180	200 to 254			

NOTE: Case Corporation reserves the right to make improvements in design or changes in specifications at any time without incurring any obligation to install them on units previously sold.

Section 1002

FLUIDS AND LUBRICANTS 1150G Crawler

CASE CORPORATION
700 State Street
Racine, WI 53404 U.S.A.

CASE CANADA CORPORATION
3350 South Service Road
Burlington, ON L7N 3M6 CANADA

Rac 7-62591

© 1996 Case Corporation
Printed in U.S.A.
February, 1995 (Revised March, 1996)

TABLE OF CONTENTS

CAPACITIES AND LUBRICANTS	2
ENGINE LUBRICATION	3
Engine Oil Selection	3
Oil Viscosity / Temperature Ranges	3
MAINTENANCE SCHEDULE	4
MAINTENANCE LOCATIONS	5

CAPACITIES AND LUBRICANTS

Engine Oil	
Capacity with filter change	16 U.S. quarts (15.1 litres)
Type of Oil	See Engine Oil Selection on Page 3
Engine Cooling System	
Capacity without heater	26 U.S. quarts (24.6 litres)
Capacity with cab heater	29 U.S. quarts (27.4 litres)
Type of Coolant	Ethylene Glycol and water mixed for lowest ambient temperature at least 50/50 mix
Fuel Tank	
Capacity	56 U.S. gallons (212 litres)
Type of Fuel	No. 2 Diesel Fuel
Hydraulic System	
Capacity - reservoir refill with filter change	17 U.S. gallons (64.4 litres)
System Capacity	22.5 U.S. gallons (85.3 litres)
Type of Oil	Case TCH Fluid
Transmission and Torque Converter	
Capacity - sump refill with filter change	14 U.S. gallons (53.0 litres)
Capacity - sump refill only	13.25 U.S. gallons (50.2 litres)
System Capacity	15 U.S. gallons (56.8 litres)
Type of Oil	Case TCH Fluid
Final Drives	
Capacity (each side)	8 U.S. quarts (7.6 litres)
Type of Oil	Case 135H EP Gear Lube
Air Conditioning Refrigerant	3.52 pounds (1.6 kg) HFC-134A

ENGINE LUBRICATION Engine Oil Selection

Case No. 1 Engine Oil is recommended for use in your Crawler Engine. Case Engine Oil will lubricate your engine correctly under all operating conditions.

If Case No. 1 Multi-Viscosity or Single Viscosity Engine Oil is not available, use only oil meeting API engine oil service category CE.

NOTE: Do not put Performance Additives or other oil additive products in the engine crankcase. The oil change intervals given in this manual are according to tests with Case Lubricants.




292L91



A27273

See the chart below for recommended viscosity at ambient air temperature ranges.

Oil Viscosity / Temperature Ranges

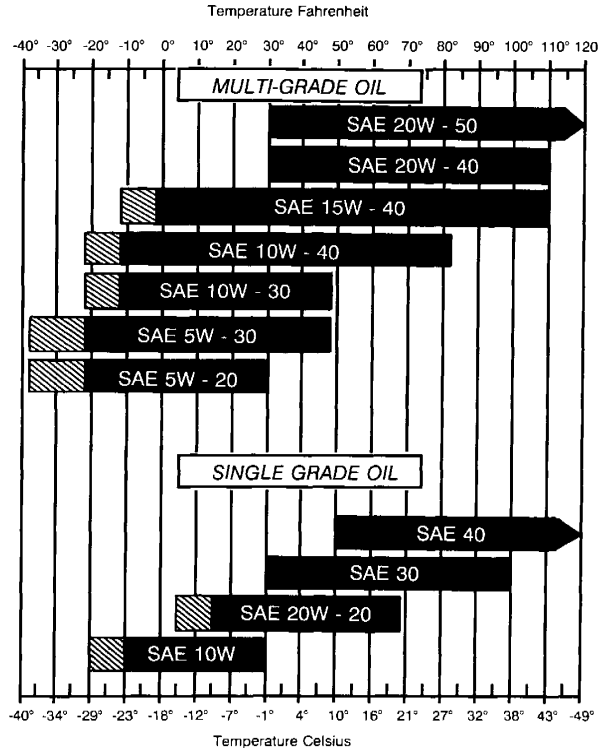

1036L0



NOTE: Use of an engine oil pan heater or an engine coolant heater is required when operating temperatures are in the crosshatch area.

MAINTENANCE SCHEDULE

----- AS REQUIRED -----

- 3. CHECK THE FAN DRIVE BELT FOR WEAR REPLACE AS REQUIRED
- 28. SERVICE THE AIR CLEANER ELEMENT IF RED BAND IN RESTRICTION
INDICATOR IS IN FULL VIEW SEE OPERATORS MANUAL
- 5. CHECK TRACK TENSION AND ADJUST AS REQUIRED - SEE NOTE 1 SEE OPERATORS MANUAL
- 31. CHECK TRACK SHOE BOLT TORQUE SEE OPERATORS MANUAL
- 21. CLEAN THE FUEL TANK FILLER SCREEN CLEAN WITH SOLVENT
- 23. DRAIN WATER AND SEDIMENT FROM FUEL TANK SEE OPERATORS MANUAL
- 28. CLEAN THE PRECLEANER DUST BOWL SEE OPERATORS MANUAL
- 17. REPLACE THE TRANSMISSION FLUID FILTER IF THE WARNING LAMP
FOR THE TRANSMISSION FLUID FILTER ILLUMINATES USE CASE FILTER
- 32. CHECK COOLANT RESERVOIR FLUID LEVEL IF THE WARNING LAMP
FOR THE COOLANT LEVEL ILLUMINATES - SEE NOTE 2 ETHYLENE GLYCOL AND WATER

----- EVERY 10 HOURS OF OPERATION OR EACH DAY - WHICHEVER OCCURS FIRST -----

- 30. CHECK ENGINE OIL LEVEL SEE PAGE 3 THIS SECTION
- 18. CHECK TRANSMISSION OIL LEVEL CASE TCH FLUID
- 16. CHECK HYDRAULIC RESERVOIR OIL LEVEL CASE TCH FLUID

----- EVERY 50 HOURS OF OPERATION -----

- 28. CHECK AIR CLEANER DUST VALVE AND COVER WING NUT SEE OPERATORS MANUAL
- 29. DRAIN WATER AND SEDIMENT FROM FIRST STAGE FUEL FILTER SEE OPERATORS MANUAL
- LUBRICATE EQUIPMENT PIVOT POINTS (NOT SHOWN) SEE OPERATORS MANUAL
- 27. LUBRICATE EQUALIZER ARM CENTER PIVOT MOLYDISULFIDE GREASE
- 6. LUBRICATE EQUALIZER ARM OUTER PIVOTS MOLYDISULFIDE GREASE

----- EVERY 250 HOURS OF OPERATION -----

- 30. CHANGE ENGINE OIL - 16 QUARTS (15 LITRES) SEE PAGE 3 THIS SECTION
- 4. REPLACE ENGINE OIL FILTER USE CASE FILTER
- 11. CHECK FINAL DRIVE OIL LEVEL (EACH SIDE) CASE 135-H EP GEAR LUBE
- CHECK CONDITION OF AIR CONDITIONING DRIVE BELT (NOT SHOWN) SEE OPERATORS MANUAL
- 20. CHECK BATTERY FLUID LEVEL CLEAN OR DISTILLED WATER
- 1. CHECK RADIATOR FLUID LEVEL (COOLANT COLD) - SEE NOTE 2 ETHYLENE GLYCOL AND WATER

----- EVERY 500 HOURS OF OPERATION -----

- 29. REPLACE FUEL FILTERS USE CASE FILTERS
- 14. REPLACE HYDRAULIC FLUID FILTER USE CASE FILTER
- 9. LUBRICATE PIVOT SHAFT HOUSING SEE OPERATORS MANUAL
- INSPECT ROPS CAB OR ROPS CANOPY AND SEAT (NOT SHOWN) SEE OPERATORS MANUAL

----- EVERY 1000 HOURS OF OPERATION -----

- 17. REPLACE TRANSMISSION FLUID FILTER USE CASE FILTERS
- 26. CHECK BRAKE WEAR SEE OPERATORS MANUAL
- 19. CLEAN TRANSMISSION DIPSTICK BREATHER CLEAN WITH SOLVENT
- 22. CHANGE TRANSMISSION FLUID CASE TCH FLUID
- 25. CLEAN TRANSMISSION SUCTION SCREEN CLEAN WITH SOLVENT
- 12. CLEAN HYDRAULIC FLUID RESERVOIR BREATHER CLEAN WITH SOLVENT
- 13. CHANGE HYDRAULIC FLUID CASE TCH FLUID
- 15. CLEAN HYDRAULIC FLUID SCREEN CLEAN WITH SOLVENT
- 11. CHANGE FINAL DRIVE OIL CASE 135-H EP GEAR LUBE
- 33. CHECK ENGINE VALVE CLEARANCES SEE SERVICE MANUAL - SECTION 2401
- 21. CLEAN BREATHER IN THE FUEL TANK CAP CLEAN WITH SOLVENT
- 7. LUBRICATE DRIVE SHAFT SPLINE MOLYDISULFIDE GREASE


----- EVERY 2000 HOURS OF OPERATION OR EACH YEAR - WHICHEVER OCCURS FIRST -----

- 28. REPLACE BOTH AIR CLEANER ELEMENTS EACH YEAR SEE OPERATORS MANUAL
- 2. DRAIN, FLUSH AND REFILL THE COOLING SYSTEM - SEE NOTE 2 SEE OPERATORS MANUAL
- WITH HEATER - 29 QUARTS (27.4 LITRES)
- WITHOUT HEATER - 26 QUARTS (24.6 LITRES)

NOTE 1: For increased track life, always keep the track tension correct. Adjust the tracks for 1.5 to 2 inches (38 to 51 mm) of track sag. See the operators manual for correct procedure.

NOTE 2: Use a 50/50 mixture of Ethylene Glycol and Water in the cooling system, when adding coolant. If the ambient temperature is lower than -34°F (-37°C), adjust the mixture.

MAINTENANCE LOCATIONS

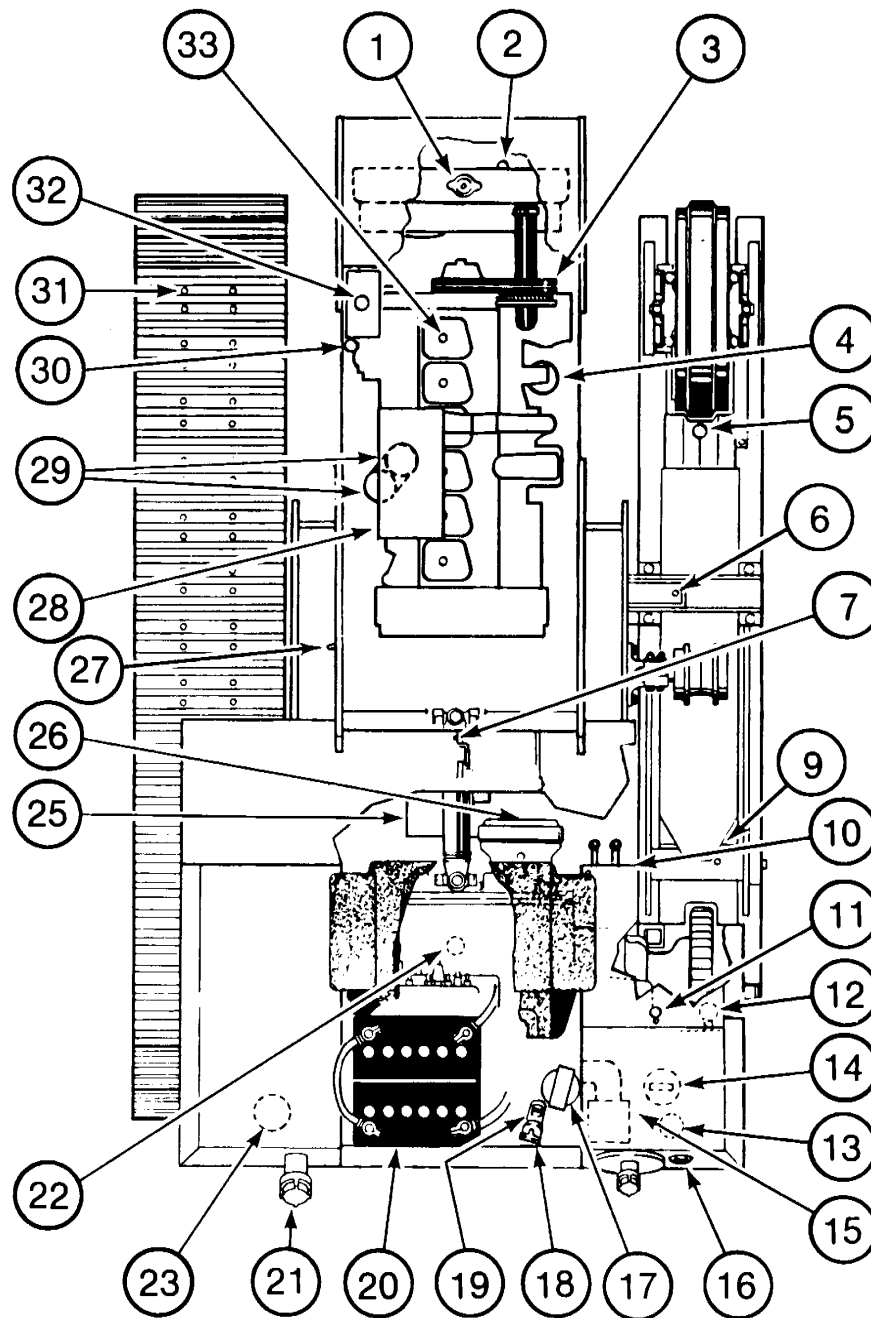

648L94

IF YOU OPERATE THE MACHINE IN SEVERE CONDITIONS, LUBRICATE AND SERVICE THE MACHINE MORE FREQUENTLY. IT IS RECOMMENDED THAT YOU SEE YOUR CASE DEALER FOR INFORMATION ON THE SYSTEMGARD LUBRICATION ANALYSIS PROGRAM.

SEE YOUR OPERATORS MANUAL FOR MAINTENANCE OF SAFETY RELATED ITEMS AND FOR DETAILED INFORMATION OF THE SERVICE ITEMS ON THIS CHART. OPERATORS MANUALS, SERVICE MANUALS, PARTS CATALOGS AND MAINTENANCE DECALS ARE AVAILABLE FOR THIS MACHINE FROM YOUR CASE DEALER.

NOTE: Case Corporation reserves the right to make improvements in design or changes in specifications at any time without incurring any obligation to install them on units previously sold.

LOCTITE PRODUCT CHART

Product	Color	Similar Products	Gap (In Inches)	Strength (Steel/Steel)	Working Temperature Range-Fahrenheit	Fixture/Full Cure (Steel/Steel) Time	Primer	Description
#3	Dark Brown					24 hr	N/A	Form a Gasket (works with oil, fuel or grease) Pliable
80	Yellow					Fast	N/A	Weatherstrip Adhesive
123	Clear					N/A	N/A	Parts Cleaner Fluid
220	Blue	290	0.003	57/143 in lbs	-65 to +250	6 min/24 hrs	747	Wicking Threadlocker
221	Purple	222	0.005	75/44 in lbs	-65 to +300	2 min/24 hrs	747	Low Strength Threadlocker
222	Purple		0.005	53/30 in lbs	-65 to +300	20 min/24 hrs	764	Low Strength Threadlocker (Small Screws)
225	Brown	222	0.010	45/25 in lbs	-65 to +300	7 min/24 hrs	747	Low Strength Threadlocker
242	Blue		0.005	80/50 in lbs	-65 to +300	10 min/24 hrs	764	Medium Strength Threadlocker
262	Red	271	0.005	160/190 in lbs	-65 to +300	5 min/24 hrs	747	High Strength Threadlocker
270	Green	271	0.007	160/320 in lbs	-65 to +300	3 min/24 hrs	747	High Strength Threadlocker
271	Red	262	0.007	160/320 in lbs	-65 to +300	10 min/24 hrs	764	High Strength Threadlocker
272	Red	620	0.007	180/220 in lbs	-65 to +450	30 min/24 hrs	764	High Temperature, High Strength
275	Green	277	0.010	210/300 in lbs	-65 to +300	3 min/24 hrs	747	High Strength Threadlocker
277	Red		0.010	225/300 in lbs	-65 to +300	60 min/24 hrs	764	High Strength Threadlocker
290	Green		0.003	85/350 in lbs	-65 to +300	6 min/24 hrs	764	Wicking Threadlocker
*404	Clear	495	0.006	3200 psi	-65 to +180	30 sec/24 hrs	NA	Instant Adhesive
*406	Clear		0.004	3200 psi	-65 to +180	15 sec/24 hrs	N/A	Surface Insensitive Adhesive
*409	Clear	454	0.008	2500 psi	-65 to +180	50 sec/24 hrs	N/A	Gel Instant Adhesive
*414	Clear		0.006	2500 psi	-65 to +180	30 sec/24 hr	N/A	Instant Adhesive
*415	Clear	454	0.010	2500 psi	-65 to +180	50 sec/24 hrs	N/A	Gap Filling Instant Adhesive (Metals)
*416	Clear	454	0.010	2500 psi	-65 to +180	50 sec/24 hrs	N/A	Gap Filling Instant Adhesive (Plastics)
*420	Clear		0.002	2500 psi	-65 to +180	15 sec/24 hrs	N/A	Wicking Instant Adhesive
*422	Clear	454	0.020	2800 psi	-65 to +180	60 sec/24 hrs	N/A	Gap Filling Instant Adhesive
*430	Clear		0.005	2500 psi	-65 to +180	20 sec/24 hrs	N/A	Metal Bonding Adhesive
*445	White/Black		0.250	2000 psi	-65 to +180	5 min/24 hrs	N/A	Fast Setting 2 Part Epoxy
*454	Clear		0.010	3200 psi	-65 to +180	15 sec/24 hrs	N/A	Surface Insensitive Gen Instant Adhesive
*495	Clear		0.004	2500 psi	-65 to +180	20 sec/24 hrs	N/A	General Purpose Instant Adhesive
*496	Clear		0.005	2500 psi	-65 to +180	20 sec/24 hrs	N/A	Metal Bonding Adhesive
504	Brt Orange	515	0.030	750 psi	-65 to +300	90 min/24 hrs	None	Rigid Gasket Eliminator
509	Light Blue		0.020	750 psi	-65 to +320	6 hr/72 hrs	764	Flange Sealant
510	Red		0.020	1000 psi	-65 to +400	30 min/24 hrs	764	High Temperature, Gasket Eliminator
515	Purple		0.010	750 psi	-65 to +300	1 hr/24 hrs	764	Gasket Eliminator 515

Rac 8-98902 * Products 404-496 (except for #445) are all instant adhesives (super glues) they differ mostly in viscosity

Printed in U.S.A.

LOCTITE PRODUCT CHART

Product	Color	Similar Products	Gap (In Inches)	Strength (Steel/Steel)	Working Temperature Range-Fahrenheit	Fixture/Full Cure (Steel/Steel) Time	Primer	Description
518	Red	515	0.030	500psi	-65 to +300	1hr/24 hrs	764	Gasket Eliminator 518 for Aluminum
542	Brown	569	N/A	132/92 in lbs	-65 to +300	2 hr/24 hrs	747	Hydraulic Sealant
545	Purple		N/A	25/20 in lbs	-65 to +300	4 hr/24 hrs	747	Low Strength Pneumatic/Hydraulic Sealant
549	Orange	504	0.020	2500 psi	-65 to +300	2 hr/24 hrs	747	Instant Seal Plastic Gasket
554	Red	277	0.015	240/240 in lbs	-65 to +300	2 to 4 hrs/24 hrs	764	Refrigerant Sealant
567	White	592	N/A	500 psi	-65 to +400	4 hrs/24 hrs	764	Pipe Sealant for Stainless Steel
568	Orange	277	0.015	2500 psi	-65 to +300	12 hrs/24 hrs	764	Plastic Gasket
569	Brown	545	0.010	40/25 in lbs	-65 to +300	1 hr/24 hrs	764	Hydraulic Sealant
570	Brown	592	N/A	25/40 in lbs	-65 to +300	6 hrs/72 hrs	764	Steam Sealant
571	Brown	592	0.015	40/20 in lbs	-65 to +300	2 to 4 hrs/24 hrs	764	Pipe Sealant
572	White	578.575	N/A	80/27 in lbs	-65 to +300	24 hrs/72 hrs	None	Gasketing
592	White		0.020	500 psi	-65 to +400	4 hrs/72 hrs	736	Pipe Sealant with Teflon
593	Black		0.250	400 psi	-95 to +400	30 min/24 hrs	N/A	RTV Silicone
601	Green	609	0.005	3000 psi	-65 to +300	10 min/24 hrs	764	Current PIN #609
609	Green		0.005	3000 psi	-65 to +300	10 min/24 hrs	764	General Purpose Retaining Compound
620	Green	640	0.015	3000 psi	-65 to +450	30 min/24 hrs	747	High Temperature Retaining Compound
635	Green	680	0.010	4000 psi	-65 to +300	1 hr/24 hrs	747	High Strength Retaining Compound
638	Green	680	0.015	4100 psi	-65 to +300	10 min/24 hrs	747	High Strength Retaining Compound
640	Green	620	0.007	3000 psi	-65 to +400	1 hr/24 hrs	747	High Temperature Retaining Compound
660	Silver		0.020	3000 psi	-65 to +300	20 min/24 hrs	764	Quick Metal
675	Green	609	0.005	3000 psi	-65 to +300	20 min/24 hrs	747	General Purpose Retaining Compound
680	Green	635	0.015	4000 psi	-65 to +300	10 min/24 hrs	747	High Strength Retaining Compound
706	Clear	755	N/A	N/A	N/A	N/A	N/A	Cleaning Solvent
707	Amber		N/A	N/A	N/A	N/A	N/A	Activator for Structural Adhesives
736	Amber		N/A	N/A	N/A	N/A	N/A	Primer NF
738	Amber		N/A	N/A	N/A	N/A	N/A	Depend Activator
747	Yellow	N/A	N/A	N/A	N/A	N/A	N/A	Primer T
751	Clear		N/A	N/A	N/A	N/A	N/A	Activator for Structural Adhesives
755	Clear		N/A	N/A	N/A	N/A	N/A	Cleaning Solvent
764	Green		N/A	N/A	N/A	N/A	N/A	Primer N
767	Silver		N/A	N/A	-65 to +1600	N/A	N/A	Anti-Seize Lubricant

Section

2001

ENGINE AND RADIATOR REMOVAL AND INSTALLATION

1150G Crawler

CASE CORPORATION
700 State Street
Racine, WI 53404 U.S.A.

CASE CANADA CORPORATION
3350 South Service Road
Burlington, ON L7N 3M6 CANADA

Rac 7-64740

© 1996 Case Corporation
Printed in U.S.A.
March, 1996

TABLE OF CONTENTS

ENGINE REMOVAL 3

ENGINE INSTALLATION 13


RADIATOR REMOVAL 23

RADIATOR INSTALLATION 29

NOTE: The Case Corporation reserves the right to make improvements in design or changes in specifications at any time without incurring any obligation to install them on units previously sold.


ENGINE REMOVAL

STEP 1

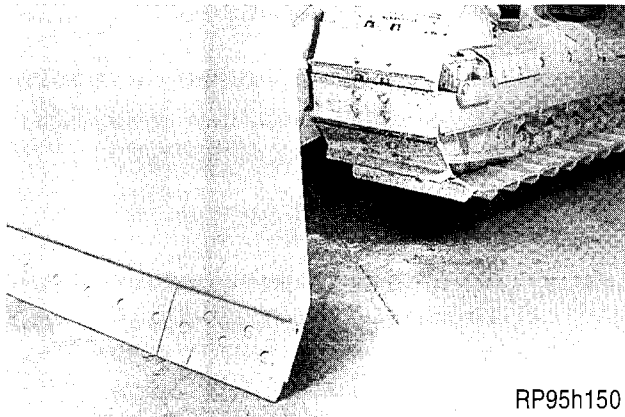


Place the crawler on blocks at least 8 inches high to allow the C-Frame to drop below the bolts mounting the radiator shroud. Alternate Method is to remove the dozer blade and C-Frame as an assembly.

STEP 2

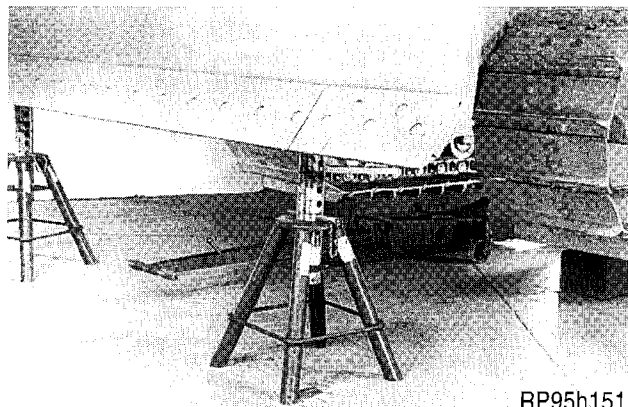


Raise and block the dozer blade up. Use a floor jack to support the undercarriage guards and remove the guards from under the engine and torque converter.

STEP 3

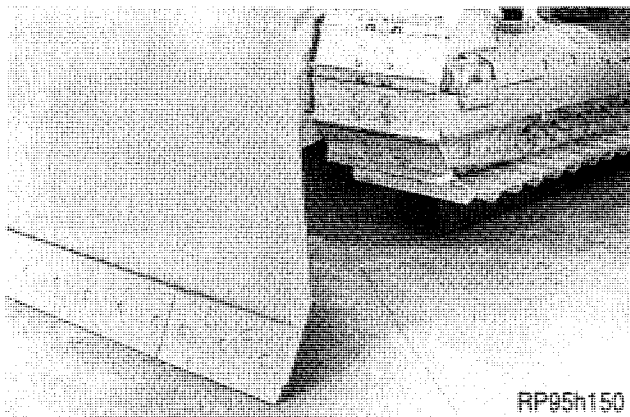

Remove the blocking from under the dozer blade and lower dozer blade to the floor.

STEP 4

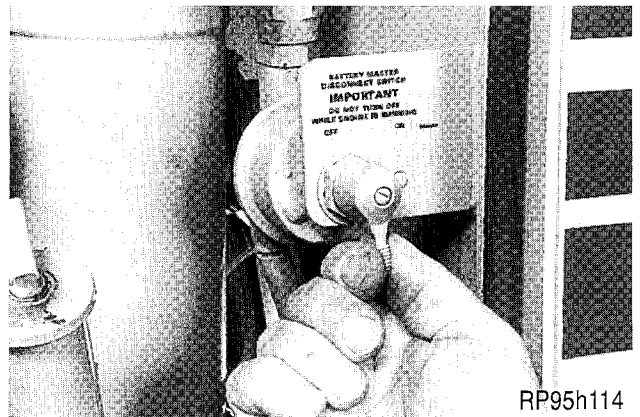

Turn the master disconnect switch for the battery to the OFF position.

STEP 5


Obtain three clean 5 gallon (20 liter) containers. Remove the drain plug in the bottom of the transmission housing and drain the transmission fluid into the clean containers, approximately 14 U.S. gallons (53.0 liters). Store the transmission fluid in a safe and clean area if the fluid is to be reused.



WARNING: When handling lubricants (oil, grease, etc.) and other chemical products, always follow the instructions for their proper use. Use proper containers to collect the fluid. Dispose of fluids and filters in a way that will protect the environment and in accordance with the laws. DO NOT smoke or use an open flame during the servicing procedure. Use eye protection.


SM475

STEP 6

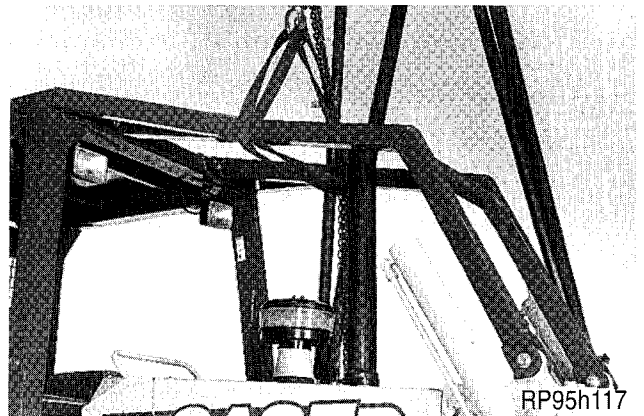


Attach a sling and overhead hoist to the brush guard assembly.

STEP 7

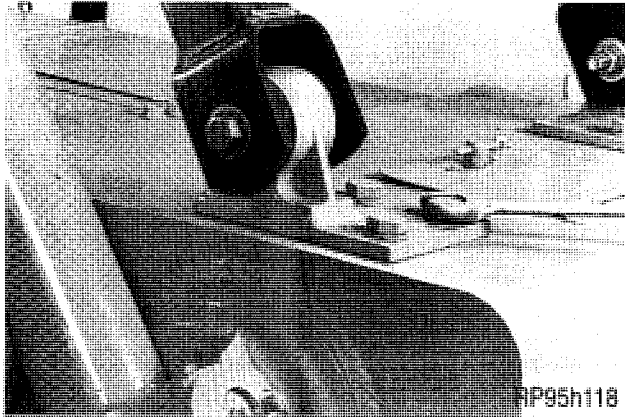

Remove the bolts, nuts and washers holding the right and left hand mounting bases for the brush guard.

STEP 8

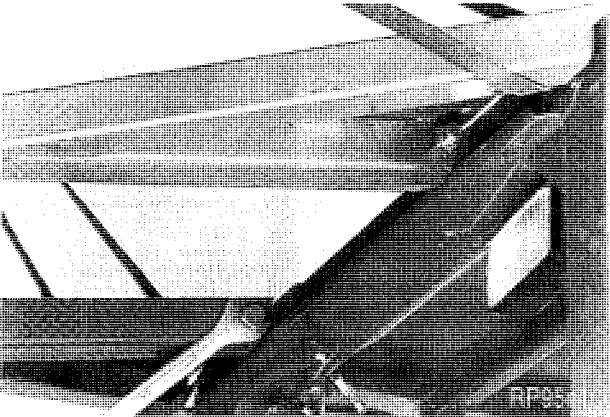


Remove the bolts, nuts and washers fastening the brush guard to the ROPS canopy and remove the brush guard.

STEP 9




Remove the right and left hand side screens for the engine compartment.

STEP 10

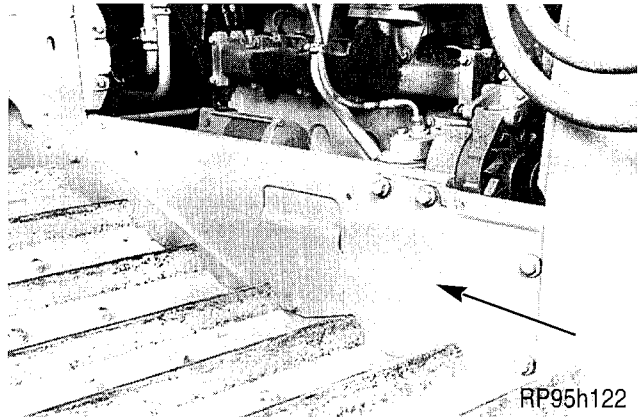


Remove the right and left hand lower side shields for the engine compartment.

STEP 11

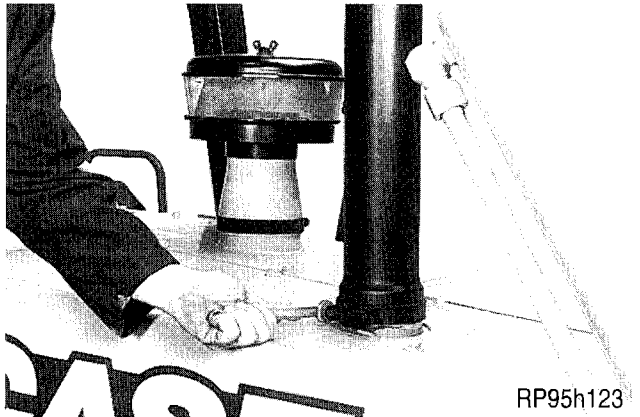

Loosen the clamp holding the exhaust pipe and remove the exhaust pipe.


STEP 12

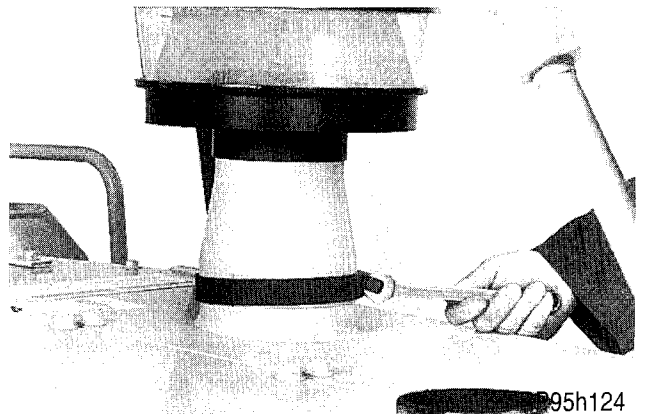


Loosen the clamp holding the inlet stack and precleaner for the air intake and remove the inlet stack.

STEP 13


Only loosen the lower cap screws on each side and remove the cap screws from the top side of the hood. Remove the right and left hand hood sections.

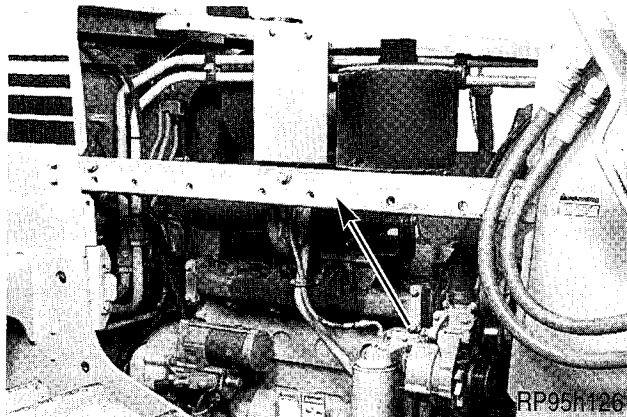STEP 14


Remove RH side shield to hood mounting bracket.

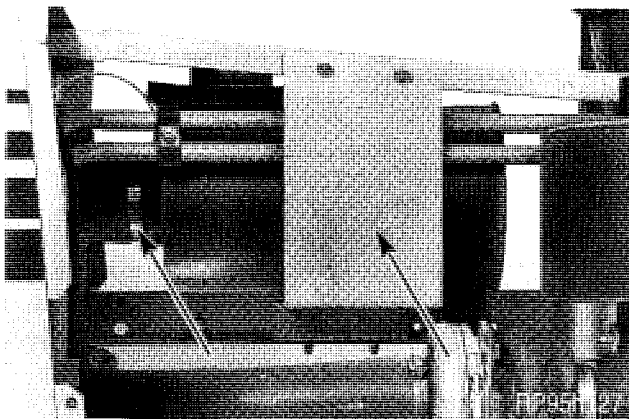STEP 15


Loosen the hose clamp for the air cleaner outlet and remove the hose. Remove the mounting bracket and air cleaner as an assembly.

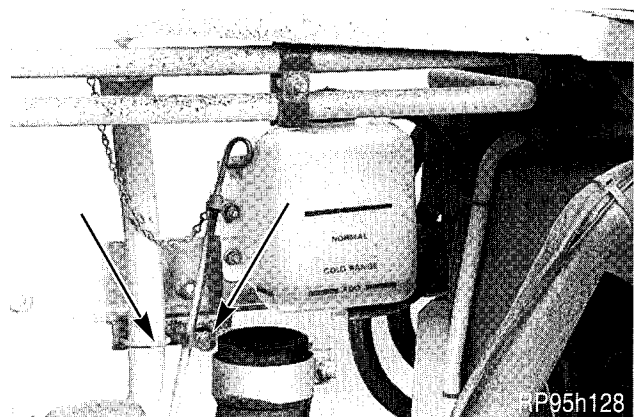STEP 16

Loosen and remove the U-bolt for the oil filler tube and the bolt in the clamp for the dipstick.

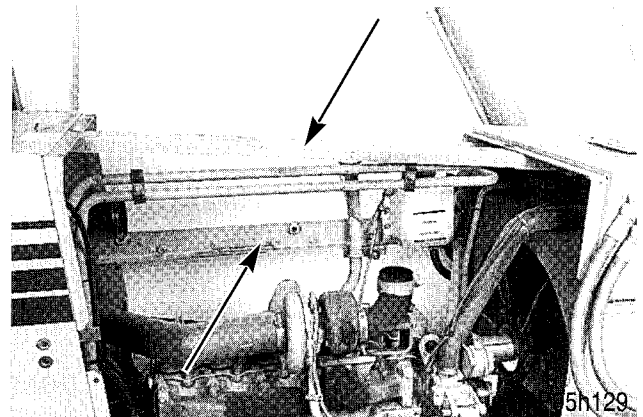STEP 17

Remove the LH side shield to hood mounting bracket and the radiator surge tank as an assembly. Remove the center mounting bracket for the hood.

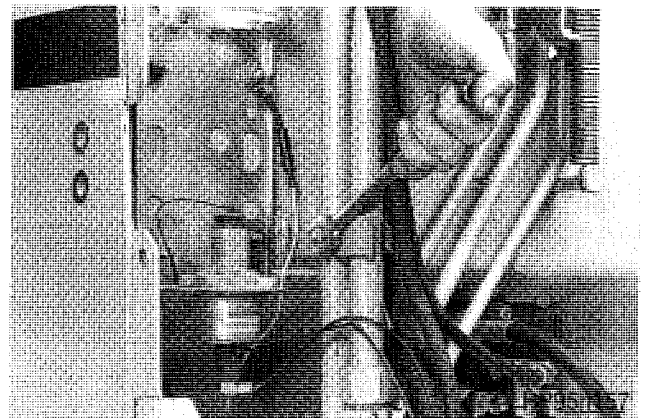STEP 18

Remove the bolt, nut and clamp for the hydraulic tubes to the lift cylinders.