

2050M Tier 2 Crawler Dozer

*PIN NCDC25000 and above; PIN NDDC25000 and above;
PIN NEDC20000 and above; PIN NFDC20000 and above*

SERVICE MANUAL

Part number 47907873

2nd edition English

October 2015

Replaces part number 47645620





SERVICE MANUAL

2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NCDC25000 -] , 2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NDDC25000 -] , 2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NEDC20000 -] , 2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NFDC20000 -] , 2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NCDC25000 -] , 2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NDDC25000 -] , 2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NEDC20000 -] , 2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NFDC20000 -] , 2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NCDC25000 -] , 2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NDDC25000 -] , 2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NEDC20000 -] , 2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NFDC20000 -] , 2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NCDC25000 -] , 2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NDDC25000 -] , 2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NEDC20000 -] , 2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NFDC20000 -] , 2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NCDC25000 -] , 2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NDDC25000 -] , 2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NEDC20000 -] , 2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NFDC20000 -] , 2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NCDC25000 -] , 2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NDDC25000 -] , 2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NEDC20000 -] , 2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NFDC20000 -]

Link Product / Engine

Product	Market Product	Engine
2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NCDC25000 -]	Middle East Africa	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NCDC25000 -]	Latin America	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NCDC25000 -]	Asia Pacific	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NCDC25000 -]	Australia New Zealand	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NDDC25000 -]	Asia Pacific	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NDDC25000 -]	Australia New Zealand	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NDDC25000 -]	Latin America	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NDDC25000 -]	Middle East Africa	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NEDC20000 -]	Latin America	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NEDC20000 -]	Australia New Zealand	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NEDC20000 -]	Asia Pacific	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NEDC20000 -]	Middle East Africa	F4HFA613N*E002

Product	Market Product	Engine
2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NFDC20000 -]	Latin America	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NFDC20000 -]	Middle East Africa	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NFDC20000 -]	Australia New Zealand	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Long Track (LT) - Non-regulated [NFDC20000 -]	Asia Pacific	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NCDC25000 -]	Asia Pacific	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NCDC25000 -]	Australia New Zealand	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NCDC25000 -]	Latin America	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NCDC25000 -]	Middle East Africa	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NDDC25000 -]	Australia New Zealand	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NDDC25000 -]	Middle East Africa	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NDDC25000 -]	Latin America	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NDDC25000 -]	Asia Pacific	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NDDC25000 -]	Asia Pacific	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NEDC20000 -]	Middle East Africa	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NEDC20000 -]	Australia New Zealand	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NEDC20000 -]	Latin America	F4HFA613N*E002

**Thanks very much for your reading,
Want to get more information,
Please click here, Then get the complete
manual**

JustClickHere 

NOTE:

**If there is no response to click on the link above,
please download the PDF document first, and then
click on it.**

**Have any questions please write to me:
admin@servicemanualperfect.com**

Product	Market Product	Engine
2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NFDC20000 -]	Asia Pacific	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NFDC20000 -]	Latin America	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NFDC20000 -]	Middle East Africa	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Long Track (LT) - Non-regulated [NFDC20000 -]	Australia New Zealand	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NCDC25000 -]	Australia New Zealand	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NCDC25000 -]	Middle East Africa	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NCDC25000 -]	Asia Pacific	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NCDC25000 -]	Latin America	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NDDC25000 -]	Asia Pacific	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NDDC25000 -]	Middle East Africa	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NDDC25000 -]	Latin America	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NDDC25000 -]	Australia New Zealand	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NEDC20000 -]	Latin America	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NEDC20000 -]	Asia Pacific	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NEDC20000 -]	Middle East Africa	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NEDC20000 -]	Australia New Zealand	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NFDC20000 -]	Middle East Africa	F4HFA613N*E002

Product	Market Product	Engine
2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NFDC20000 -]	Asia Pacific	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NFDC20000 -]	Latin America	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Extra Long Track (XLT) - Non-regulated [NFDC20000 -]	Australia New Zealand	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NCDC25000 -]	Middle East Africa	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NCDC25000 -]	Latin America	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NCDC25000 -]	Asia Pacific	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NCDC25000 -]	Australia New Zealand	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NDDC25000 -]	Asia Pacific	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NDDC25000 -]	Latin America	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NDDC25000 -]	Middle East Africa	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NDDC25000 -]	Australia New Zealand	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NEDC20000 -]	Middle East Africa	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NEDC20000 -]	Latin America	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NEDC20000 -]	Australia New Zealand	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NEDC20000 -]	Asia Pacific	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NFDC20000 -]	Middle East Africa	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NFDC20000 -]	Asia Pacific	F4HFA613N*E002

Product	Market Product	Engine
2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NFDC20000 -]	Latin America	F4HFA613N*E002
2050M Power Angle Tilt (PAT) Blade, Low Ground Pressure (LGP) - Non-regulated [NFDC20000 -]	Australia New Zealand	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NCDC25000 -]	Latin America	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NCDC25000 -]	Australia New Zealand	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NCDC25000 -]	Middle East Africa	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NCDC25000 -]	Asia Pacific	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NDDC25000 -]	Middle East Africa	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NDDC25000 -]	Australia New Zealand	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NDDC25000 -]	Asia Pacific	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NDDC25000 -]	Latin America	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NEDC20000 -]	Middle East Africa	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NEDC20000 -]	Latin America	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NEDC20000 -]	Australia New Zealand	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NEDC20000 -]	Asia Pacific	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NFDC20000 -]	Latin America	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NFDC20000 -]	Asia Pacific	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NFDC20000 -]	Australia New Zealand	F4HFA613N*E002

Product	Market Product	Engine
2050M Bulldozer (BD) Blade, Extra Long Track (XLT) - Non-regulated [NFDC20000 -]	Middle East Africa	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NCDC25000 -]	Middle East Africa	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NCDC25000 -]	Asia Pacific	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NCDC25000 -]	Latin America	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NCDC25000 -]	Australia New Zealand	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NDDC25000 -]	Asia Pacific	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NDDC25000 -]	Middle East Africa	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NDDC25000 -]	Latin America	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NDDC25000 -]	Australia New Zealand	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NEDC20000 -]	Asia Pacific	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NEDC20000 -]	Middle East Africa	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NEDC20000 -]	Latin America	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NEDC20000 -]	Australia New Zealand	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NFDC20000 -]	Asia Pacific	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NFDC20000 -]	Middle East Africa	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NFDC20000 -]	Latin America	F4HFA613N*E002
2050M Bulldozer (BD) Blade, Low Ground Pressure (LGP) - Non-regulated [NFDC20000 -]	Australia New Zealand	F4HFA613N*E002

Contents

INTRODUCTION

Engine.....	10
[10.001] Engine and crankcase	10.1
[10.216] Fuel tanks	10.2
[10.206] Fuel filters	10.3
[10.202] Air cleaners and lines	10.4
[10.250] Turbocharger and lines.....	10.5
[10.254] Intake and exhaust manifolds and muffler	10.6
[10.400] Engine cooling system	10.7
[10.414] Fan and drive	10.8
[10.310] Aftercooler.....	10.9
[10.304] Engine lubrication system.....	10.10
Hydrostatic drive.....	29
[29.218] Pump and motor components.....	29.1
Brakes and controls	33
[33.110] Parking brake or parking lock	33.1
[33.202] Hydraulic service brakes	33.2
Hydraulic systems.....	35
[35.300] Reservoir, cooler, and filters.....	35.1
[35.104] Fixed displacement pump	35.2
[35.106] Variable displacement pump	35.3
[35.105] Charge pump.....	35.4
[35.359] Main control valve.....	35.5
[35.741] Dozer blade cylinders	35.6
[35.525] Auxiliary hydraulic valves and lines	35.7
[35.752] Hydraulic fan drive cooling system.....	35.8

[35.000] Hydraulic systems	35.9
Frames and ballasting	39
[39.100] Frame	39.1
Tracks and track suspension	48
[48.130] Track frame and driving wheels	48.1
[48.100] Tracks	48.2
[48.134] Track tension units	48.3
[48.138] Track rollers	48.4
[48.140] Dropbox and final drive	48.5
Cab climate control	50
[50.100] Heating	50.1
[50.104] Ventilation	50.2
[50.200] Air conditioning	50.3
Electrical systems	55
[55.000] Electrical system	55.1
[55.011] Fuel tank system	55.2
[55.015] Engine control system	55.3
[55.030] Service brake electrical system	55.4
[55.050] Heating, Ventilation, and Air-Conditioning (HVAC) control system	55.5
[55.100] Harnesses and connectors	55.6
[55.201] Engine starting system	55.7
[55.202] Cold start aid	55.8
[55.301] Alternator	55.9
[55.302] Battery	55.10
[55.408] Warning indicators, alarms, and instruments	55.11
[55.512] Cab controls	55.12
[55.518] Wiper and washer system	55.13
[55.DTC] FAULT CODES	55.14

Dozer blade and arm..... 86

 [86.110] Dozer blade 86.1

 [86.124] Dozer pushbeams and struts 86.2

Tools 89

 [89.128] Ripper assembly 89.1

Platform, cab, bodywork, and decals 90

 [90.150] Cab 90.1

 [90.114] Operator protections 90.2

 [90.124] Pneumatically-adjusted operator seat..... 90.3

 [90.100] Engine hood and panels 90.4



INTRODUCTION

Contents

INTRODUCTION

Foreword - Important notice regarding equipment servicing (*)	3
Safety rules (*)	4
Safety rules - Personal safety (*)	5
Safety rules - Ecology and the environment (*)	12
Safety rules - Do not operate tag (*)	13
Basic instructions - Shop and assembly (*)	14
Torque - Minimum tightening torques for normal assembly (*)	16
Torque - Standard torque data for hydraulics (*)	19
Torque - Special torques (*)	21
Engine cooling system - Basic instructions (*)	23
Maintenance chart (*)	25
Basic instructions - Moving a disabled machine (*)	26
Hydraulic contamination (*)	35
Conversion factors (*)	36
Consumables - Loctite® product chart (*)	38
Engine lubrication system - Consumables (*)	44
Capacities (*)	45
Product identification (*)	48
Product identification - Machine orientation (*)	50

(*) See content for specific models

Foreword - Important notice regarding equipment servicing

2050M

ANZ --- APAC --- LA --- MEA

All repair and maintenance work listed in this manual must be carried out only by qualified dealership personnel, strictly complying with the instructions given, and using, whenever possible, the special tools.

Anyone who performs repair and maintenance operations without complying with the procedures provided herein shall be responsible for any subsequent damages.

The manufacturer and all the organizations of its distribution chain, including - without limitation - national, regional, or local dealers, reject any responsibility for damages caused by parts and/or components not approved by the manufacturer, including those used for the servicing or repair of the product manufactured or marketed by the manufacturer. In any case, no warranty is given or attributed on the product manufactured or marketed by the manufacturer in case of damages caused by parts and/or components not approved by the manufacturer.

The manufacturer reserves the right to make improvements in design and changes in specifications at any time without notice and without incurring any obligation to install them on units previously sold. Specifications, descriptions, and illustrative material herein are as accurate as known at time of publication but are subject to change without notice.

In case of questions, refer to your CASE CONSTRUCTION Sales and Service Networks.

Safety rules

2050M

ANZ --- APAC --- LA --- MEA


Personal safety





This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible death or injury.

Throughout this manual you will find the signal words DANGER, WARNING, and CAUTION followed by special instructions. These precautions are intended for the personal safety of you and those working with you.

Read and understand all the safety messages in this manual before you operate or service the machine.

 DANGER indicates a hazardous situation that, if not avoided, will result in death or serious injury.

 WARNING indicates a hazardous situation that, if not avoided, could result in death or serious injury.

 CAUTION indicates a hazardous situation that, if not avoided, could result in minor or moderate injury.

FAILURE TO FOLLOW DANGER, WARNING, AND CAUTION MESSAGES COULD RESULT IN DEATH OR SERIOUS INJURY.

Machine safety

NOTICE: Notice indicates a situation that, if not avoided, could result in machine or property damage.

Throughout this manual you will find the signal word Notice followed by special instructions to prevent machine or property damage. The word Notice is used to address practices not related to personal safety.

Information

NOTE: Note indicates additional information that clarifies steps, procedures, or other information in this manual.

Throughout this manual you will find the word Note followed by additional information about a step, procedure, or other information in the manual. The word Note is not intended to address personal safety or property damage.

Safety rules - Personal safety

2050M

ANZ --- APAC --- LA --- MEA

General safety rules

Use caution when you operate the machine on slopes. Raised equipment, full tanks and other loads will change the center of gravity of the machine. The machine can tip or roll over when near ditches and embankments or uneven surfaces.

Never permit anyone other than the operator to ride on the machine.

Never operate the machine under the influence of alcohol or drugs, or while you are otherwise impaired.

When digging or using ground-engaging attachments, be aware of buried cables. Contact local utilities to determine the locations of services.

Pay attention to overhead power lines and hanging obstacles. High voltage lines may require significant clearance for safety.

Hydraulic oil or diesel fuel leaking under pressure can penetrate the skin, causing serious injury or infection.

- DO NOT use your hand to check for leaks. Use a piece of cardboard or paper.
- Stop the engine, remove the key, and relieve the pressure before you connect or disconnect fluid lines.
- Make sure that all components are in good condition. Tighten all connections before you start the engine or pressurize the system.
- If hydraulic fluid or diesel fuel penetrates the skin, seek medical attention immediately.
- Continuous long term contact with hydraulic fluid may cause skin cancer. Avoid long term contact and wash the skin promptly with soap and water.

Keep clear of moving parts. Loose clothing, jewelry, watches, long hair, and other loose or hanging items can become entangled in moving parts.

Wear protective equipment when appropriate.

DO NOT attempt to remove material from any part of the machine while it is being operated or while components are in motion.

Make sure that all guards and shields are in good condition and properly installed before you operate the machine. Never operate the machine with shields removed. Always close access doors or panels before you operate the machine.

Dirty or slippery steps, ladders, walkways, and platforms can cause falls. Make sure these surfaces remain clean and clear of debris.

A person or pet within the operating area of a machine can be struck or crushed by the machine or its equipment. DO NOT allow anyone to enter the work area.

Raised equipment and/or loads can fall unexpectedly and crush persons underneath. Never allow anyone to enter the area underneath raised equipment during operation.

Never operate the engine in enclosed spaces as harmful exhaust gases may build up.

Before you start the machine, be sure that all controls are in neutral or park lock position.

Start the engine only from the operator's seat. If you bypass the safety start switch, the engine can start with the transmission in gear. Do not connect or short across terminals on the starter solenoid. Attach jumper cables as described in the manual. Starting in gear may cause death or serious injury.

Always keep windows, mirrors, and all lighting clean to provide the best possible visibility while you operate the machine.

Operate controls only when seated in the operator's seat, except for those controls expressly intended for use from other locations.

Before you leave the machine:

1. Park the machine on a firm, level surface.
2. Put all controls in neutral or park lock position.
3. Engage the parking brake. Use wheel chocks if required.
4. Lower all hydraulic equipment — Implements, header, etc.
5. Turn off the engine and remove the key.

When, due to exceptional circumstances, you would decide to keep the engine running after you leave the operator's station, then you must follow these precautions:

1. Bring the engine to low idle speed.
2. Disengage all drive systems.

3. **⚠ WARNING**

Some components may continue to run down after disengaging drive systems.

Make sure all drive systems are fully disengaged.

Failure to comply could result in death or serious injury.

W0113A

Shift the transmission into neutral.

4. Apply the parking brake.

⚠ General maintenance safety ⚠

Keep the area used for servicing the machine clean and dry. Clean up spilled fluids.

Service the machine on a firm, level surface.

Install guards and shields after you service the machine.

Close all access doors and install all panels after servicing the machine.

Do not attempt to clean, lubricate, clear obstructions, or make adjustments to the machine while it is in motion or while the engine is running.

Always make sure that working area is clear of tools, parts, other persons and pets before you start operating the machine.

Unsupported hydraulic cylinders can lose pressure and drop the equipment, causing a crushing hazard. Do not leave equipment in a raised position while parked or during service, unless the equipment is securely supported.

Jack or lift the machine only at jack or lift points indicated in this manual.

Incorrect towing procedures can cause accidents. When you tow a disabled machine follow the procedure in this manual. Use only rigid tow bars.

Stop the engine, remove the key, and relieve pressure before you connect or disconnect fluid lines.

Stop the engine and remove the key before you connect or disconnect electrical connections.

Scalding can result from incorrect removal of coolant caps. Cooling systems operate under pressure. Hot coolant can spray out if you remove a cap while the system is hot. Allow the system to cool before you remove the cap. When you remove the cap, turn it slowly to allow pressure to escape before you completely remove the cap.

Replace damaged or worn tubes, hoses, electrical wiring, etc.

The engine, transmission, exhaust components, and hydraulic lines may become hot during operation. Take care when you service such components. Allow surfaces to cool before you handle or disconnect hot components. Wear protective equipment when appropriate.

When welding, follow the instructions in the manual. Always disconnect the battery before you weld on the machine. Always wash your hands after you handle battery components.

Fire and explosion prevention

Fuel or oil that is leaked or spilled on hot surfaces or electrical components can cause a fire.

Crop materials, trash, debris, bird nests, or flammable material can ignite on hot surfaces.

Always have a fire extinguisher on or near the machine.

Make sure that the fire extinguisher(s) is maintained and serviced according to the manufacturer's instructions.

At least once each day and at the end of the day, remove all trash and debris from the machine especially around hot components such as the engine, transmission, exhaust, battery, etc. More frequent cleaning of your machine may be necessary depending on the operating environment and conditions.

At least once each day, remove debris accumulation around moving components such as bearings, pulleys, belts, gears, cleaning fans, etc. More frequent cleaning of your machine may be necessary depending on the operating environment and conditions.

Inspect the electrical system for loose connections and frayed insulation. Repair or replace loose or damaged parts.

Do not store oily rags or other flammable material on the machine.

Do not weld or flame cut any items that contain flammable material. Clean items thoroughly with non-flammable solvents before welding or flame-cutting.

Do not expose the machine to flames, burning brush, or explosives.

Promptly investigate any unusual smells or odors that may occur during operation of the machine.

General battery safety

Always wear eye protection when you work with batteries.

Do not create sparks or have open flame near a battery.

Ventilate the area when you charge a battery or use a battery in an enclosed area.

Disconnect the negative (-) terminal first and reconnect the negative (-) terminal last.

When you weld on the machine, disconnect both terminals of the battery.

Do not weld, grind, or smoke near a battery.

When you use auxiliary batteries or connect jumper cables to start the engine, use the procedure shown in the operator's manual. Do not short across terminals.

Follow the manufacturer's instructions when you store and handle batteries.

Battery post, terminals, and related accessories contain lead and lead compounds. Wash hands after handling. This is a California Proposition 65 warning.

Battery acid causes burns. Batteries contain sulfuric acid. Avoid contact with skin, eyes, or clothing. Antidote (external): Flush with water. Antidote (eyes): flush with water for 15 minutes and seek medical attention immediately. Antidote (internal): Drink large quantities of water or milk. Do not induce vomiting. Seek medical attention immediately.

Keep out of reach of children and other unauthorized persons.

⚠ Operator presence system ⚠

Your machine is equipped with an operator presence system to prevent the use of some features while the operator is not in the operator's seat.

Never disconnect or bypass the operator presence system.

If the operator presence system is inoperable, then it must be repaired.

⚠ Seat belts ⚠

Seat belts must be worn at all times.

Seat belt inspection and maintenance:


- Keep seat belts in good condition.
- Keep sharp edges and items that can cause damage away from the belts.
- Periodically check belts, buckles, retractors, tethers, slack take-up system, and mounting bolts for damage and wear.
- Replace all parts that have damage or wear.
- Replace belts that have cuts that can make the belt weak.
- Check that bolts are tight on the seat bracket or mounting.
- If the belt is attached to the seat, make sure that the seat or seat brackets are mounted securely.
- Keep seat belts clean and dry.
- Clean belts only with soap solution and warm water.
- Do not use bleach or dye on the belts because this can make the belts weak.

Pull the right-hand belt from the seat belt retractor. Fasten the metal belt end into the left-hand buckle.



RCIL10CWL037AAL 1

Press the red button on the left-hand seat belt mechanism to release the seat belt.

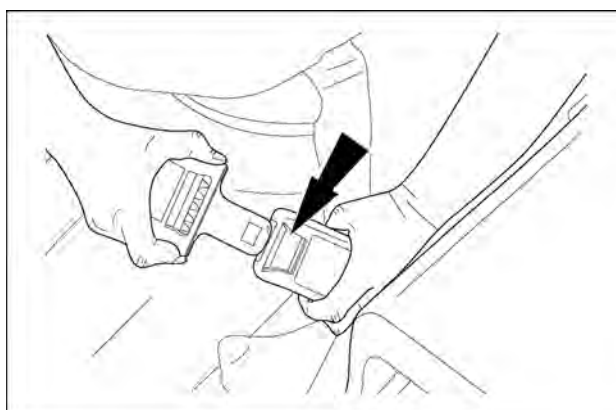

RCIL10CWL083FAL 2

Operator protective structure

Your machine is equipped with an operator protective structure, such as: a Roll Over Protective Structure (ROPS), Falling Objects Protective Structure (FOPS), or a cab with a ROPS. A ROPS may be a can frame or a two-posted or four-posted structure used for the protection of the operator to minimize the possibility of serious injury. The mounting structure and fasteners forming the mounting connection with the machine are part of the ROPS.

The protective structure is a special safety component of your machine.

DO NOT attach any device to the protective structure for pulling purposes. DO NOT drill holes to the protective structure.

The protective structure and interconnecting components are a certified system. Any damage, fire, corrosion, or modification will weaken the structure and reduce your protection. If this occurs, THE PROTECTIVE STRUCTURE MUST BE REPLACED so that it will provide the same protection as a new protective structure. Contact your dealer for protective structure inspection and replacement.

After an accident, fire, tip over, or roll over, the following MUST be performed by a qualified technician before returning the machine to field or job-site operations:

- The protective structure MUST BE REPLACED.
- The mounting or suspension for the protective structure, operator's seat and suspension, seat belts and mounting components, and wiring within the operator's protective system MUST be carefully inspected for damage.
- All damaged parts MUST BE REPLACED.

DO NOT WELD, DRILL HOLES, ATTEMPT TO STRAIGHTEN, OR REPAIR THE PROTECTIVE STRUCTURE. MODIFICATION IN ANY WAY CAN REDUCE THE STRUCTURAL INTEGRITY OF THE STRUCTURE, WHICH COULD CAUSE DEATH OR SERIOUS INJURY IN THE EVENT OF FIRE, TIP OVER, ROLL OVER, COLLISION, OR ACCIDENT.

Seat belts are part of your protective system and must be worn at all times. The operator must be held to the seat inside the frame in order for the protective system to work.

Air-conditioning system

The air-conditioning system is under high pressure. Do not disconnect any lines. The release of high pressure can cause serious injury.

The air-conditioning system contains gases that are harmful to the environment when released into the atmosphere. Do not attempt to service or repair the system.

Only trained service technicians can service, repair, or recharge the air-conditioning system.

Backup alarm system

Do not disconnect backup alarm system if so equipped.

Personal Protective Equipment (PPE)

Wear Personal Protective Equipment (PPE) such as hard hat, eye protection, heavy gloves, hearing protection, protective clothing, etc.

Do Not Operate tag

Before you start servicing the machine, attach a 'Do Not Operate' warning tag to the machine in an area that will be visible.

Hazardous chemicals

If you are exposed to or come in contact with hazardous chemicals you can be seriously injured. The fluids, lubricants, paints, adhesives, coolant, etc. required for the function of your machine can be hazardous. They may be attractive and harmful to domestic animals as well as humans.

Material Safety Data Sheets (MSDS) provide information about the chemical substances within a product, safe handling and storage procedures, first aid measures, and procedures to take in the event of a spill or accidental release. MSDS are available from your dealer.

Before you service your machine check the MSDS for each lubricant, fluid, etc. used in this machine. This information indicates the associated risks and will help you service the machine safely. Follow the information in the MSDS, and on manufacturer containers, as well as the information in this manual, when you service the machine.

Dispose of all fluids, filters, and containers in an environmentally safe manner according to local laws and regulations. Check with local environmental and recycling centers or your dealer for correct disposal information.

Store fluids and filters in accordance with local laws and regulations. Use only appropriate containers for the storage of chemicals or petrochemical substances.

Keep out of reach of children or other unauthorized persons.

Applied chemicals require additional precautions. Obtain complete information from the manufacturer or distributor of the chemicals before you use them.

Utility safety

When digging or using ground-engaging equipment, be aware of buried cables and other services. Contact your local utilities or authorities, as appropriate, to determine the locations of services.

Make sure that the machine has sufficient clearance to pass in all directions. Pay special attention to overhead power lines and hanging obstacles. High voltage lines may require significant clearance for safety. Contact local authorities or utilities to obtain safe clearance distances from high voltage power lines.

Retract raised or extended components, if necessary. Remove or lower radio antennas or other accessories. Should a contact between the machine and an electric power source occur, the following precautions must be taken:

- Stop the machine movement immediately.
- Apply the parking brake, stop the engine, and remove the key.
- Check if you can safely leave the cab or your actual position without contact with electrical wires. If not, stay in your position and call for help. If you can leave your position without touching lines, jump clear of the machine to make sure that you do not make contact with the ground and the machine at the same time.
- Do not permit anyone to touch the machine until power has been shut off to the power lines.

Electrical storm safety

Do not operate machine during an electrical storm.

If you are on the ground during an electrical storm, stay away from machinery and equipment. Seek shelter in a permanent, protected structure.

If an electrical storm should strike during operation, remain in the cab. Do not leave the cab or operator's platform. Do not make contact with the ground or objects outside the machine.

Mounting and dismounting

Mount and dismount the machine only at designated locations that have handholds, steps, and/or ladders.

Do not jump off of the machine.

Make sure that steps, ladders, and platforms remain clean and clear of debris and foreign substances. Injury may result from slippery surfaces.