

1845C SKID STEER

Service Manual 8-42913

Table of Contents

Description	Section No.	Publication Form No.
General	Tab 1	
Loctite Product Chart		8-98900
Safety Rules, Service Manual Introduction and Torque Specifications	1001	8-42910
Fluids and Lubricants	1002	8-17742
Engines	Tab 2	
Engine and Radiator Removal and Installation	2000	8-42910
Engine Accessories (Air Cleaner, Ether Injection System and Mufflers)	2001	8-42910
Detailed Engine Specifications	2402	8-24163
Cylinder Head and Valve Train	2415	8-24173
Cylinder Block, Crankshaft, Pistons, Rods, Camshaft, Main Bearings, Oil Seals and Flywheel	2425	8-24183
Lubrication System	2445	8-24193
Cooling System	2455	8-24203
Fuel System	Tab 3	
Fuel System and Filters	3410	8-24212
Fuel Injectors	3413	8-24233
CAV Injection Pump (4-390)1	3414	7-37131
Electrical	Tab 4	
Electrical "How it Works"	4000	7-14060
Removal and Installation of Starter and Alternator	4001	8-42910
Electrical Specifications and Troubleshooting and Schematics	4002	8-17753
Battery	4005	8-44360
Starter and Starter Solenoid	4006	8-42910
65 Ampere Alternator A187873	4007	8-15670
65 Ampere Alternator A186125	4019	8-11381
Power Train	Tab 6	
Hydrostatic How It Works and Troubleshooting	6000	7-14070
Removal and Installation of Piston Pumps, Motor, Planetary and Drive Coupling	6001	8-44170
Hydrostatic Drive System Troubleshooting	6002	8-17762
Piston Pump	6004	8-44180

CASE CORPORATION
700 State Street
Racine, WI 53404 U.S.A.

CASE CANADA CORPORATION
3350 South Service Road
Burlington, ON L7N 3M6 CANADA

Reprinted

Table of Contents

Description	Section No.	Publication Form No.
Motor	6005	8-44190
Controls	6006	8-44200
Sprockets, Chains and Axle Housings	6007	8-44210
Planetaries	6009	8-42910
Drive Coupling	6010	8-42910
Wheels and Tires	6011	8-44220
Hydraulics		Tab 8
How It Works	8000	7-14080
Removal and Installation of Hydraulic Components	8001	8-42910
Hydraulic System Specifications and Troubleshooting and Schematics	8002	8-17773
Cleaning the Hydraulic System and Hydrostatic System	8003	8-42910
Pump	8004	8-42910
Loader Control Valve	8005	8-44230
Auxiliary Control Valve	8006	8-42910
D125 Backhoe Control Valve -NA Only	8007	7-44240
Cylinders	8009	8-99470
Mounted Equipment		Tab 9
Control Linkages, Pedals and Levers "How it Works"	9000	7-14090
Pedals and Levers	9001	8-17782
Loader	9001	8-44250
ROPS Canopy, Seat, Seat Belts, and Operators Compartment	9003	8-44260
Auxiliary Hydraulic Installation	9004	8-42910
Backhoe (D125 Backhoe)	9005	7-44270
Rear Pocket		
Hydraulic and Electrical Schematic Foldout	In Rear Pocket	7-11941

NOTE: Case Corporation reserves the right to make improvements in design or changes in specifications at any time without incurring any obligation to install them on units previously sold.

1001

SAFETY RULES SERVICE MANUAL INTRODUCTION AND TORQUE SPECIFICATIONS

TABLE OF CONTENTS

Safety Rules	1001-2	Illustrations and Photos	1001-4
Service Manual Introduction	1001-4	Clear and Simple English	1001-4
Right, Left, Front, and Rear	1001-4	Special Tools	1001-4
Text	1001-4	Product Identification Number (PIN) and Serial Numbers	1001-5
Table of Contents	1001-4	Torque Specifications	1001-6
Page Numbers	1001-4		

SAFETY RULES




This symbol means **ATTENTION! BECOME ALERT! YOUR SAFETY IS INVOLVED.** The message that follows the symbol contains important information about safety. Carefully read the message. Make sure you fully understand the causes of possible injury or death. 1-1-C

IMPORTANT: To prevent injury on the job, follow the Warning, Caution, and Danger notes in this section and other sections throughout this manual. Follow the instructions carefully.

The procedures recommended and shown in this manual are good, effective service methods. However, all possible procedures and service hazards may not be covered. Therefore, if you use a tool or procedure not recommended, you must make sure that the method you select is a safe method.

Put the warning tag shown below on the key for the key switch when you are servicing or repairing this machine. One warning tag is on every new machine. You can buy additional warning tags, part number 331-4614, from Service Parts Supply.

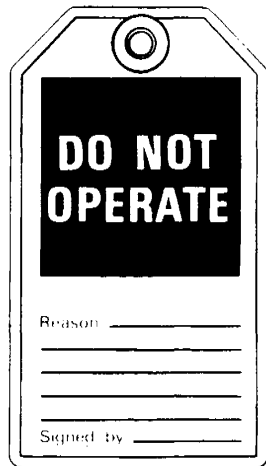

780449



WARNING: Read operator's manual to familiarize yourself with control lever functions.

46-27



WARNING: Operate tractor and equipment controls from the seat position only. Any other method could result in serious injury.

48-55



WARNING: This is a one man machine, no riders allowed.

35-8



WARNING: If you wear clothing that is too loose or do not use the correct safety equipment for your job, you can be injured. Always wear clothing that will not catch on objects. Extra safety equipment that can be required includes hard hat, safety shoes, ear protection, eye or face protection, heavy gloves and reflector clothing.

45-3-A



750213



DANGER: Engine exhaust fumes can cause death. If it is necessary to start the engine in a closed place, remove the exhaust fumes from the area with an exhaust pipe extension. If you do not have an exhaust pipe extension, open the doors and get outside air into the area.

48-56



WARNING: Operate controls from the operator's seat only.

35-7



WARNING: When working in the area of the fan belt with the engine running, avoid loose clothing if possible, and use extreme caution.

35-4

**Thanks very much for your reading,
Want to get more information,
Please click here, Then get the complete
manual**

JustClickHere 

NOTE:

**If there is no response to click on the link above,
please download the PDF document first, and then
click on it.**

**Have any questions please write to me:
admin@servicemanualperfect.com**

WARNING: Whenever the bucket must be raised to aid in servicing, block the loader arms in place with lift cylinder support strut or a suitable safety stand.

23-7-B



1. Lift Cylinder Support Strut

855871

WARNING: When doing checks and tests on the equipment hydraulics, follow the procedures as they are written. **DO NOT** change the procedure. 47-44

WARNING: When putting the hydraulic cylinders on this machine through the necessary cycles to check operation or to remove air from a circuit, make sure all people are out of the way. 47-45

WARNING: Use insulated gloves or mittens when working with hot parts. 47-41A

CAUTION: Pin sized and smaller streams of hydraulic oil under pressure can penetrate the skin and result in serious infection. If hydraulic oil under pressure does penetrate the skin, seek medical treatment immediately. Maintain all hoses and tubes in good condition. Make sure all connections are tight. Make a replacement of any tube or hose that is damaged or thought to be damaged. **DO NOT** use your hand to check for leaks; use a piece of cardboard or wood. 40-6-A

CAUTION: When removing hardened pins such as a pivot pin, or a hardened shaft, use a soft head (brass or bronze) hammer or use a driver made from brass or bronze and a steel head hammer. 46-17

CAUTION: When using a hammer to remove and install pivot pins or separate parts, using compressed air or using a grinder, wear eye protection that completely encloses the eyes (approved goggles or other approved eye protectors). 46-13

CAUTION: When servicing or repairing the machine, keep the shop floor and operator's compartment and steps free of oil, water, grease, tools, etc. Use an oil absorbing material and/or shop cloths as required. Use safe practices at all times. 40-8

CAUTION: Use suitable floor (service) jacks or chain hoists to raise wheels or track off the floor. Always block machine in place with suitable safety stands. 40-7-A


CAUTION: Some components of this machine are very heavy. Use suitable lifting equipment or additional help as instructed in this service manual. 40-10

SERVICE MANUAL INTRODUCTION

This service manual has been prepared with the latest service information available. Troubleshooting, removal, disassembly, inspection and installation procedures, and complete specifications and tightening references can be found in most sections. Some sections have drawings but no written procedure because the job is so easily done. This service manual is one of the most important tools available to the service technician.

Right, Left, Front, and Rear

The terms right-hand and left-hand and front and rear as used in this manual indicate the right and left sides, and front and rear of the machine as seen from the operator's seat for correct operation of the machine or attachment.

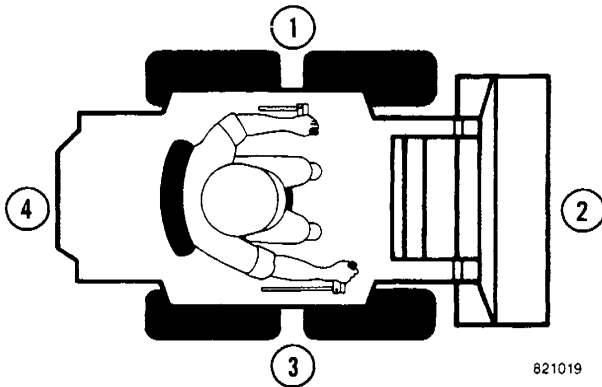

- | | |
|---------------------|----------------------|
| 1. <i>Left Side</i> | 3. <i>Right Side</i> |
| 2. <i>Front</i> | 4. <i>Rear</i> |

Text

If the service manual is for more than one machine or different models of components (planetary axles, gear boxes, control valves, etc.) the procedures have the steps necessary to service each model.

Table of Contents

A Table of Contents is in the front of this manual. The Table of Contents shows the main divisions and the sections that are in each division. The individual sections, where necessary, have a Table of Contents on the cover or second page of that section.

Page Numbers

All page numbers are made of two numbers separated by a dash, such as 4002-9. The number before the dash is the section number. The number following the dash is the page number in that section. Page numbers will be found at the upper right or left of each page.

Illustrations and Photos

Illustrations are put as near as possible to the text and are to be used as part of the text. Photos normally are put below the step to which they apply.

Clear and Simple English

This manual is written in C.A.S.E. (Clear and Simple English). C.A.S.E. is easier to read and understand than "regular" English because C.A.S.E. uses a small number of common words and has special rules for writing.

Special Tools

Special tools are needed to remove and install, disassemble and assemble, check, and adjust some component parts of this machine. Some special tools can be easily made locally and the necessary information to make the tool is in this service manual. Other special tools are more difficult to make locally and are available from Service Tools in the U.S. and from Jobborn Manufacturing in Canada. Use these tools according to the instructions in this service manual for your personal safety and to do the job correctly.

Order special tools from either of the following companies:

Service Tools
P.O. Box 314
Owatonna, Minnesota 55060


Jobborn Manufacturing Co.
97 Frid Street
Hamilton, Ontario L8P 4M3
Canada


PRODUCT IDENTIFICATION NUMBER (PIN) AND SERIAL NUMBERS

NOTE: *A serial number plate is also on some components such as the starter, alternator, pump, etc.*

TORQUE SPECIFICATIONS - U.S. HARDWARE

Use the torques in this chart when special torques are not given. These torques apply to fasteners with both UNC and UNF threads as received from suppliers, dry, or when lubricated with engine oil. Not applicable if special graphites, moly-disulfide greases, or other extreme pressure lubricants are used.


Grade 5 Bolts, Nuts, and Studs			
			
Size	Pound-Feet	Newton metres	Kilogram metres
1/4 in 6.4 mm	9-11	12-15	1.2-1.5
5/16 in 7.9 mm	17-21	23-28	2.4-2.9
3/8 in 9.5 mm	35-42	48-57	4.8-5.8
7/16 in 11.1 mm	54-64	73-87	7.5-8.8
1/2 in 12.7 mm	80-96	109-130	11.1-13.3
9/16 in 14.3 mm	110-132	149-179	15.2-18.2
5/8 in 15.9 mm	150-180	203-244	20.8-24.9
3/4 in 19.0 mm	270-324	366-439	37.3-44.8
7/8 in 22.2 mm	400-480	542-651	55.3-66.4
1.0 in 25.4 mm	580-696	787-944	80.2-96.2
1-1/8 in 28.6 mm	800-880	1085-1193	111-122
1-1/4 in 31.8 mm	1120-1240	1519-1681	155-171
1-3/8 in 34.9 mm	1460-1680	1980-2278	202-232
1-1/2 in 38.1 mm	1940-2200	2631-2983	268-304


Grade 8 Bolts, Nuts, and Studs			
			
Size	Pound-Feet	Newton metres	Kilogram metres
1/4 in 6.4 mm	12-15	16-20	1.7-2.1
5/16 in 7.9 mm	24-29	33-39	3.3-4.0
3/8 in 9.5 mm	45-54	61-73	6.2-7.5
7/16 in 11.1 mm	70-84	95-114	9.7-11.6
1/2 in 12.7 mm	110-132	149-179	15.2-18.2
9/16 in 14.3 mm	160-192	217-260	22.1-26.5
5/8 in 15.9 mm	220-264	298-358	30.4-36.5
3/4 in 19.0 mm	380-456	515-618	52.5-63.0
7/8 in 22.2 mm	600-720	814-976	83.0-99.5
1.0 in 25.4 mm	900-1080	1220-1465	124-149
1-1/8 in 28.6 mm	1280-1440	1736-1953	177-199
1-1/4 in 31.8 mm	1820-2000	2468-2712	252-277
1-3/8 in 34.9 mm	2380-2720	3227-3688	329-376
1-1/2 in 38.1 mm	3160-3560	4285-4827	437-492

TORQUE SPECIFICATIONS - METRIC HARDWARE

Use the following torques when special torques are not given.

These values apply to fasteners with coarse threads as received from supplier, plated or unplated, or when lubricated with engine oil. These values do not apply if graphite or moly-disulfide grease or oil is used.

Grade 8.8 Bolts, Nuts, and Studs			
			
Size	Pound-Feet	Newton metres	Kilogram metres
M4 0.15 in	2-3	3-4	0.3-0.4
M5 0.19 in	5-6	6.5-8	0.7-0.8
M6 0.23 in	8-9	10.5-12	1.1-1.2
M8 0.31 in	19-23	26-31	2.6-3.2
M10 0.39 in	38-45	52-61	5.3-6.2
M12 0.46 in	66-79	90-107	9.1-10.9
M14 0.55 in	106-127	144-172	14.7-17.6
M16 0.62 in	160-200	217-271	22.1-27.7
M20 0.78 in	320-380	434-515	44.2-52.5
M24 0.94 in	500-600	675-815	69.1-83.0
M30 1.17 in	920-1100	1250-1500	127-152
M36 1.40 in	1600-1950	2175-2600	221-270

Grade 10.9 Bolts, Nuts, and Studs			
			
Size	Pound-Feet	Newton metres	Kilogram metres
M4 0.15 in	3-4	4-5	0.4-0.5
M5 0.19 in	7-8	9.5-11	1.0-1.1
M6 0.23 in	11-13	15-17.5	1.5-1.8
M8 0.31 in	27-32	37-43	3.7-4.4
M10 0.39 in	54-64	73-87	7.5-8.8
M12 0.46 in	93-112	125-150	12.9-15.5
M14 0.55 in	149-179	200-245	20.6-24.7
M16 0.62 in	230-280	310-380	31.8-38.7
M20 0.78 in	450-540	610-730	62.2-74.7
M24 0.94 in	780-940	1050-1275	108-130
M30 1.17 in	1470-1770	2000-2400	203-245
M36 1.40 in	2580-3090	3500-4200	357-427

Grade 12.9 Bolts, Nuts, and Studs



Usually the torque values specified for grade 10.9 fasteners can be used satisfactorily on grade 12.9 fasteners.

TORQUE SPECIFICATIONS - STEEL HYDRAULIC FITTINGS

Tube OD Hose ID	Thread Size	Pound- Feet	Newton metres	Kilogram metres
37 Degree Flare Fittings				
1/4 in 6.4 mm	7/16-20	6-12	8-16	0.8-1.7
5/16 in 7.9 mm	1/2-20	8-16	11-21	1.1-2.2
3/8 in 9.5 mm	9/16-18	10-25	14-33	1.4-3.5
1/2 in 12.7 mm	3/4-16	15-42	20-56	2.1-5.8
5/8 in 15.9 mm	7/8-14	25-58	34-78	3.5-8.0
3/4 in 19.0 mm	1-1/16-12	40-80	54-108	5.5-11.1
7/8 in 22.2 mm	1-3/16-12	60-100	81-135	8.3-13.9
1.0 in 25.4 mm	1-5/16-12	75-117	102-158	10.4-16.2
1-1/4 in 31.8 mm	1-5/8-12	125-165	169-223	17.3-22.8
1-1/2 in 38.1 mm	1-7/8-12	210-250	285-338	29.0-34.6

Tube OD Hose ID	Thread Size	Pound- Feet	Newton metres	Kilogram metres
Straight Threads with O-ring				
1/4 in 6.4 mm	7/16-20	12-19	16-25	1.7-2.6
5/16 in 7.9 mm	1/2-20	16-25	22-33	2.2-3.5
3/8 in 9.5 mm	9/16-18	25-40	34-54	3.5-5.5
1/2 in 12.7 mm	3/4-16	42-67	57-90	5.8-9.3
5/8 in 15.9 mm	7/8-14	58-92	79-124	8.0-12.7
3/4 in 19.0 mm	1-1/16-12	80-128	108-174	11.1-17.8
7/8 in 22.2 mm	1-3/16-12	100-160	136-216	13.8-22.1
1.0 in 25.4 mm	1-5/16-12	117-187	159-253	16.2-25.9
1-1/4 in 31.8 mm	1-5/8-12	165-264	224-357	22.8-36.5
1-1/2 in 38.1 mm	1-7/8-12	250-400	339-542	34.6-55.3

Split Flange Mounting Bolts			
Size	Pound- Feet	Newton metres	Kilogram metres
5/16-18	15-20	20-27	2.1-2.8
3/8-16	20-25	26-33	2.8-3.5
7/16-14	35-45	47-61	4.7-6.2
1/2-13	55-65	74-88	7.6-9.0
5/8-11	140-150	190-203	19.4-20.7

Section 1002

FLUIDS AND LUBRICANTS 1845C Skid Steer

CASE CORPORATION
700 State Street
Racine, WI 53404 U.S.A.

CASE CANADA CORPORATION
450 Sherman Avenue
Hamilton, ON L8N 4C4 CANADA

Bur 8-17742

© 1998 Case Corporation
Printed in U.S.A.
December, 1998

TABLE OF CONTENTS

CAPACITIES AND LUBRICANTS	2
ENGINE LUBRICATION	3
Engine Oil Selection	3
Oil Viscosity / Temperature Usage Recommendation.....	3
MAINTENANCE SCHEDULE	4, 6
MAINTENANCE LOCATIONS	5, 7
DX100 - DX100XR BACKHOE PIVOTS.....	8 - 9
D125 BACKHOE PIVOTS	10

CAPACITIES AND LUBRICANTS

ENGINE OIL

Capacity with filter change	10.4 litres (11 U.S. quarts)
Type of oil	See Engine Oil Recommendations on Page 3
Oil Level Check Interval	Every 10 Hours of Operation or One Time Each Day
Oil Change and Filter Replacement Interval.....	Every 250 Hours of Operation

ENGINE COOLING SYSTEM

Capacity	17 litres (18 U.S. quarts)
Type of coolant	Ethylene glycol and water mixed for lowest ambient temperature at least 50/50 mix

FUEL TANK

Capacity	81.4 litres (21.5 U.S. gallons)
----------------	---------------------------------

HYDRAULIC SYSTEM

System capacity.....	39.7 litres (10.5 U.S. gallons)
Reservoir capacity with filter change	32.2 litres (8.5 U.S. gallons)
Reservoir capacity without filter change	31.2 litres (8.25 U.S. gallons)
Type of oil (Specifications).....	Case No. 1 engine oil SAE 10W30 (API Service CE, CD, CC/SG) mixed with Case HTO additive

NOTE: *Machines prior to PIN JAF0067438 do not need the Case HTO additive. All machines PIN JAF0067438 and after must have the Case HTO additive mixed as instructed.*

WHEN CHANGING OIL: When you change the hydraulic oil, you must add 1.4 litres (1.5 U.S. quarts) of Case HTO additive (Case part number B17508).

WHEN ADDING OIL: When you add oil to the hydraulic reservoir between oil changes, you must use a mixture of Case HTO additive and SAE 10W-30 engine oil. Completely mix one U.S. quart of Case HTO additive to 19 litres (5 U.S. gallons) of 10W-30 engine oil (20 to 1 ratio).

DRIVE CHAIN COMPARTMENTS

Capacity (each)	4.7 litres (5 U.S. quarts)
Type of oil (Specifications).....	Case No. 1 engine oil - SAE 10W30

PLANETARIES (Only Before PIN JAF0067438)

Capacity (each side)	0.5 litres (1 U.S. pint)
Type of oil (Specifications).....	Case No. 1 engine oil - SAE 10W30

GREASE FITTINGS

Quantity	As required
Specifications	Case molydisulfide grease

BATTERY


Quantity	As required
Specifications	Drinking or distilled water

ENGINE LUBRICATION

Engine Oil Selection

Case No. 1 Engine Oil is recommended for use in your Case Uni-Loader Engine. Case Engine Oil will lubricate your engine correctly under all operating conditions.

If Case No. 1 Multi-Viscosity or Single Viscosity Engine Oil is not available, use only oil meeting API engine oil service category CE.

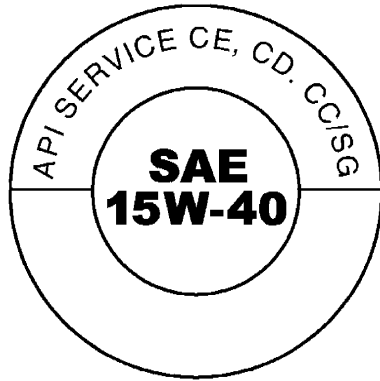

ts98h007




tr98h001

See the chart below for recommended viscosity at ambient air temperature ranges.

NOTE: Do not put Performance Additives or other oil additive products in the engine crankcase. The oil change intervals given in this manual are according to tests with Case Lubricants.

Oil Viscosity / Temperature Usage Recommendation

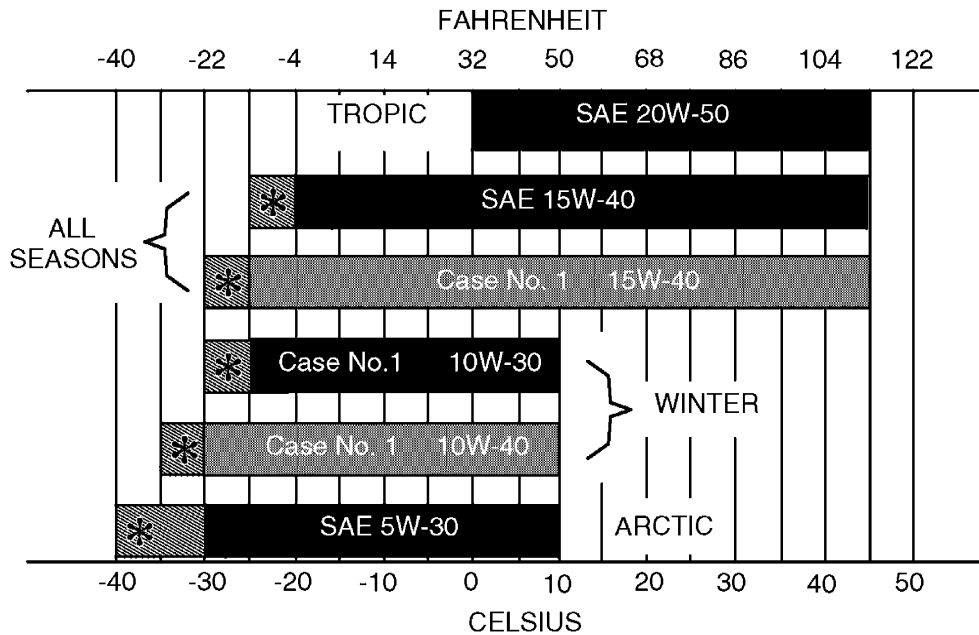

* Use of an engine oil heater, or an engine coolant heater, is required in crosshatched area.

ts98h006

MAINTENANCE SCHEDULE


SERVICE ITEM	AS REQUIRED	EVERY 10 HOURS OF OPERATION OR DAILY	EVERY 50 HOURS OF OPERATION	EVERY 100 HOURS OF OPERATION	EVERY 250 HOURS OF OPERATION	EVERY 500 HOURS OF OPERATION	EVERY 1000 HOURS OF OPERATION	EVERY 2000 HOURS OF OPERATION
1. Lubricate the Loader Pivot Points (16 Grease Fittings) Case Molydisulfide Grease.		●						
2. Check the Precleaner for the Air Cleaner - if Equipped. See Operators Manual.		●						
3. Service the Air Cleaner if the Air Cleaner Warning Lamps On. See Operators Manual.	●							
3. Clean and Check the Air Cleaner Dust Valve. See Operators Manual.			●					
3. Replace the Air Cleaner Elements. Use Case Filter.								●
4. Inspect the Rops. See Operators Manual.						●		
5. Check the Wheel Nut Torque, 115 to 125 lb ft (156 To 170 Nm). See Section 6008	●							
6. Check the Drive Chain Tension (Each Side). See Section 9001.					●			
7. Lubricate the Cluster Sprocket Bearings (2 Grease Fittings) Case Molydisulfide Grease.					●			
8. Drain Water from the Fuel Filter. See Operators Manual.			●					
9. Change Engine Oil and Replace the Engine Oil Filter. Case No. 1 Engine Oil, Use Case Filters.					●			
10. Replace the Fuel Filter(s). See Operators Manual.						●		
11. Clean Dirt and Debris from the Engine Area.	●							
12. Check the Fan Belt for Wear Replace if Damaged.	●							
13. Drain, Flush and Refill the Engine Cooling System (See Note 3). Ethylene Glycol and Water.								●
14. Check Engine Oil Level Case No. 1 Engine Oil.		●						
15. Check and Clean the Hydraulic Oil Cooler. See Operators Manual.		●						

NOTE 1: When adding oil to the hydraulic reservoir between oil changes, use a mixture of Case HTO additive and SAE 10W30 engine oil. Completely mix one U.S. quart of Case HTO additive to 19 litres (5 U.S. gallons) of SAE 10W30 oil (20 to 1 ratio).

NOTE 2: When changing the hydraulic oil in the reservoir, add 1.7 litres (1.6 U.S. gallons) of Case HTO additive (Case Part No. B17508).

NOTE 3: Use Ethylene Glycol and water that is mixed 50/50. When adding to the engine, use this mixture.

MAINTENANCE LOCATIONS

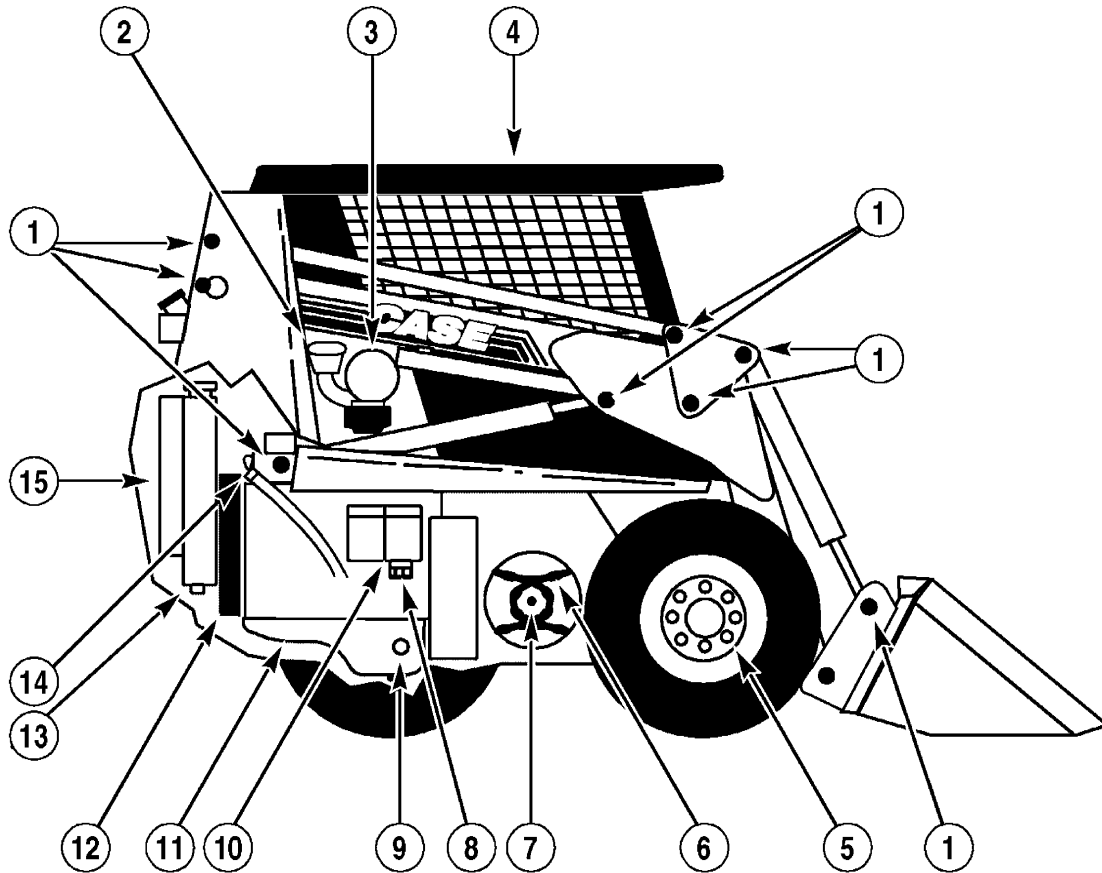

ts98h004


IF YOU OPERATE THE MACHINE IN SEVERE CONDITIONS, LUBRICATE AND SERVICE THE MACHINE MORE FREQUENTLY. IT IS RECOMMENDED THAT YOU SEE YOUR **CASE** DEALER FOR INFORMATION ON THE SYSTEMGARD LUBRICATION SYSTEM.

SEE YOUR OPERATORS MANUAL FOR MAINTENANCE OF SAFETY RELATED ITEMS AND FOR DETAILED INFORMATION OF THE SERVICE ITEMS ON THIS CHART. OPERATORS AND SERVICE MANUALS ARE AVAILABLE FOR THIS MACHINE FROM YOUR **CASE** DEALER.

MAINTENANCE SCHEDULE

	SERVICE ITEM	AS REQUIRED	EVERY 10 HOURS OF OPERATION OR DAILY	EVERY 50 HOURS OF OPERATION	EVERY 100 HOURS OF OPERATION	EVERY 250 HOURS OF OPERATION	EVERY 500 HOURS OF OPERATION	EVERY 1000 HOURS OF OPERATION	EVERY 2000 HOURS OF OPERATION
16.	Drain Water from the Fuel Tank. See Operators Manual.							●	
17.	Change the Chain Compartment Oil (Each Side) Case No. 1 Engine Oil (SAE 10W30).						●		
18.	Change Engine Oil and Replace the Engine Oil Filter. Case No. 1. Engine Oil, Use Case Filters.					●			
19.	Clean the Spark Arrester Muffler. See Operators Manual.				●				
20.	Check the Engine Valve Clearance. See Service Manual.							●	
21.	Clean the Battery and Check the Battery Fluid Level. Add Drinking or Distilled Water.					●			
22.	Change the Planetary Oil (Each Side) Only Before PIN JAF0067438. Case 135H EP Gear Lube.							●	
23.	Lubricate the Coupler Wedges (2 Grease Fittings) if Equipped. Case Molydisulfide Grease.		●						
24.	Lubricate the Case Coupler Latch Pivots (2 Grease Fittings. Case Molydisulfide Grease.					●			
25.	Check the Tire Air Pressure and Tire Condition. See Section 6008.			●					
26.	Lubricate Each Axle Bearing (4 Grease Fittings). Case Molydisulfide Grease.					●			
27.	Lubricate the Loader Cross Shaft Pivot (2 Grease Fittings). Case Molydisulfide Grease.					●			
28.	Lubricate the Drive Shaft Universals (2 Fittings). Case Molydisulfide Grease.						●		
29.	Replace the Hydraulic Oil Filter. Use Case Filters.						●		
29.	Replace the Hydraulic Filter if the Hydraulic Filter Warning Lamp Is On. Use Case Filters.	●							
30.	Change the Hydraulic Oil (See Note 2). Case No.1 Engine Oil.							●	
31.	Check the Hydraulic Reservoir Oil Level. (See Note 1). Case No. 1 Engine Oil.		●						
32.	Check Engine Oil Level. Case No. 1 Engine Oil.		●						
33.	Check the Radiator Coolant Level (See Note 3). Ethylene Glycol and Water.					●			
34.	Check the Engine Coolant Reservoir Fluid Level (See Note 3). Ethylene Glycol And Water.		●						

MAINTENANCE LOCATIONS

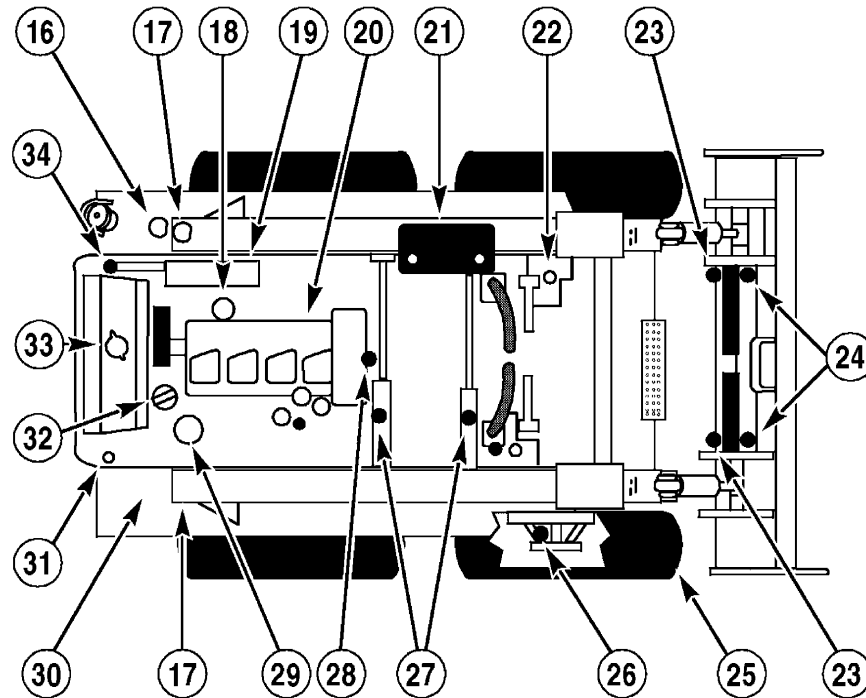

ts98h005


IF YOU OPERATE THE MACHINE IN SEVERE CONDITIONS, LUBRICATE AND SERVICE THE MACHINE MORE FREQUENTLY. IT IS RECOMMENDED THAT YOU SEE YOUR **CASE** DEALER FOR INFORMATION ON THE SYSTEMGARD LUBRICATION SYSTEM.

SEE YOUR OPERATORS MANUAL FOR MAINTENANCE OF SAFETY RELATED ITEMS AND FOR DETAILED INFORMATION OF THE SERVICE ITEMS ON THIS CHART. OPERATORS AND SERVICE MANUALS ARE AVAILABLE FOR THIS MACHINE FROM YOUR **CASE** DEALER.

D100 - D100XR BACKHOE PIVOTS (IF EQUIPPED) Use Case Molydisulfide Grease

SERVICE ITEM		AS REQUIRED	EVERY 10 HOURS OF OPERATION OR DAILY	EVERY 50 HOURS OF OPERATION	EVERY 100 HOURS OF OPERATION	EVERY 250 HOURS OF OPERATION	EVERY 500 HOURS OF OPERATION	EVERY 1000 HOURS OF OPERATION	EVERY 2000 HOURS OF OPERATION
	Lubricate the Backhoe Pivot Points (8 Fittings D100 Backhoe and 12 Fittings D100XR Backhoe). Case Molydisulfide Grease.		●						
	Lubricate the Manure Fork Grapple (2 Grease Fittings) if Equipped. Not Shown. Case Molydisulfide Grease.		●						
	Check the Control Linkages and Test Seat Bar Operation. See Section 9001.		●						
1.	Upper Swing Pivot - 1 Fitting		●						
2.	Dipper Cylinder, Closed End - 1 Fitting		●						
3.	Boom Cylinder, Closed End - 1 Fitting		●						
4.	Dipper Pivot - 1 Fitting		●						
5.	Dipper Cylinder, Rod End - 1 Fitting		●						
6.	Bucket Cylinder, Closed End - 1 Fitting		●						
7.	Bucket Cylinder, Rod End - 1 Fitting		●						
8.	Boom Cylinder, Rod End - 1 Fitting		●						
9.	Boom Pivot		●						
10.	Lower Swing Pivot - 1 Fitting		●						
11.	Stabilizer Pivot - 2 Fittings (One Each Side)		●						

D100 - D100XR BACKHOE PIVOTS (IF EQUIPPED) Use Case Molydisulfide Grease

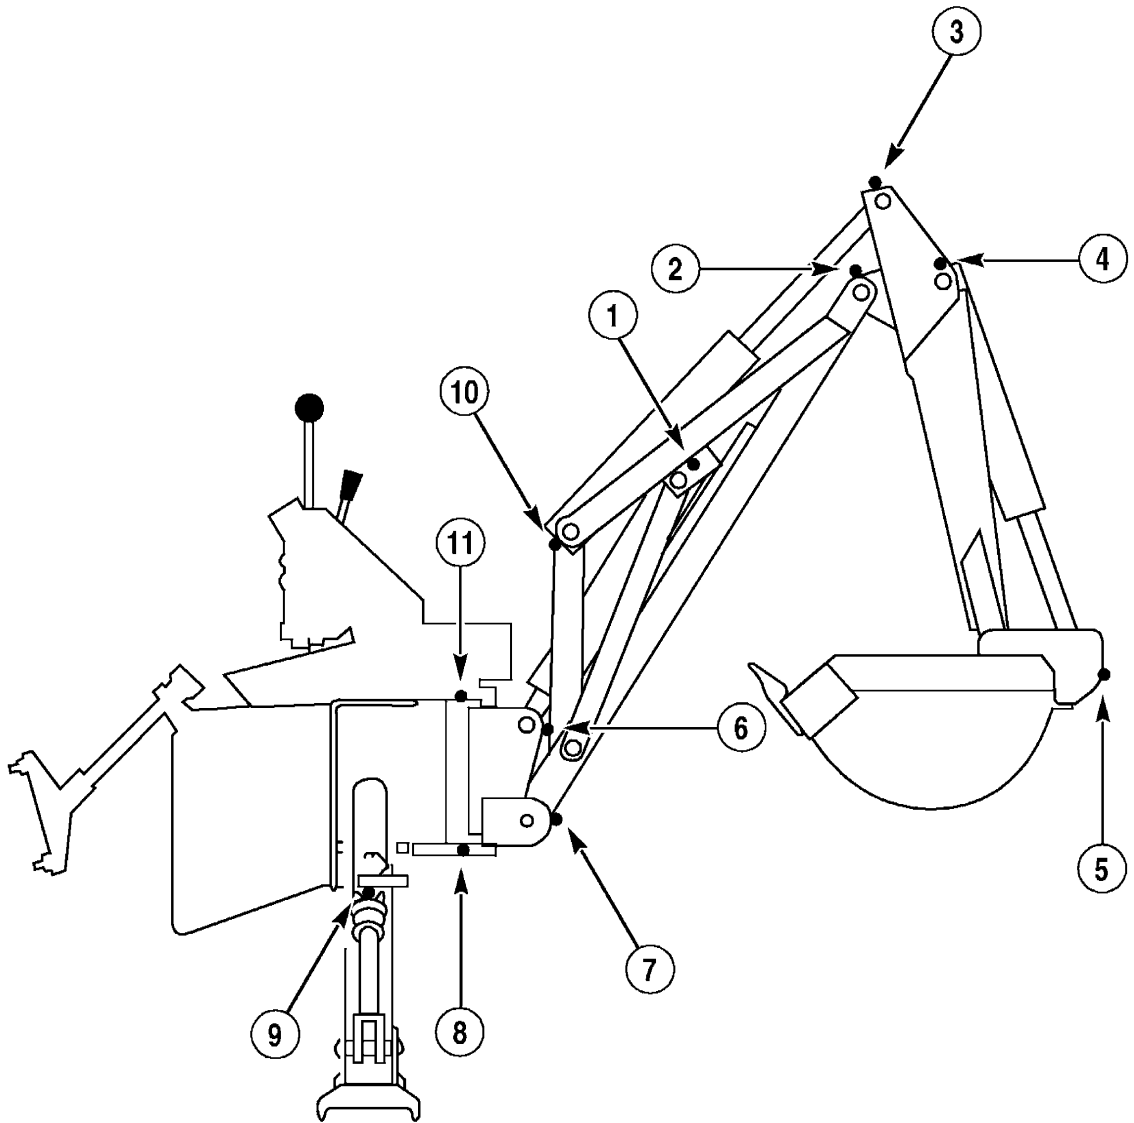

1s98h008


IF YOU OPERATE THE MACHINE IN SEVERE CONDITIONS, LUBRICATE AND SERVICE THE MACHINE MORE FREQUENTLY. IT IS RECOMMENDED THAT YOU SEE YOUR **CASE** DEALER FOR INFORMATION ON THE SYSTEMGARD LUBRICATION SYSTEM.

SEE YOUR OPERATORS MANUAL FOR MAINTENANCE OF SAFETY RELATED ITEMS AND FOR DETAILED INFORMATION OF THE SERVICE ITEMS ON THIS CHART. OPERATORS AND SERVICE MANUALS ARE AVAILABLE FOR THIS MACHINE FROM YOUR **CASE** DEALER.

D125 BACKHOE PIVOTS (IF EQUIPPED) Use Case Molydisulfide Grease

SERVICE ITEM		AS REQUIRED	EVERY 10 HOURS OF OPERATION OR DAILY	EVERY 50 HOURS OF OPERATION	EVERY 100 HOURS OF OPERATION	EVERY 250 HOURS OF OPERATION	EVERY 500 HOURS OF OPERATION	EVERY 1000 HOURS OF OPERATION	EVERY 2000 HOURS OF OPERATION
	Lubricate the Backhoe Pivot Points (22 Fittings D125 Backhoe). Case Molydisulfide Grease.		●						
	Lubricate the Manure Fork Grapple (2 Grease Fittings) if Equipped. Not Shown. Case Molydisulfide Grease.		●						
	Check the Control Linkages and Test Seat Bar Operation. See Section 9001.		●						
1.	Upper Swing Pivot - 1 Fitting		●						
2.	Boom Cylinder - 2 Fittings		●						
3.	Dipper Pivot - 1 Fitting		●						
4.	Bucket Cylinder, Closed End - 1 Fitting		●						
5.	Bucket Cylinder, Rod End - 1 Fitting		●						
6.	Bucket Pivot and Linkage - 2 Fittings		●						
7.	Dipper Cylinder - 2 Fittings		●						
8.	Boom Pivot		●						
9.	Lower Swing Pivot - 1 Fitting		●						
10.	Stabilizer Pivot - 2 Fittings (One Each Side)		●						

D125 BACKHOE PIVOTS (IF EQUIPPED) Use Case Molydisulfide Grease

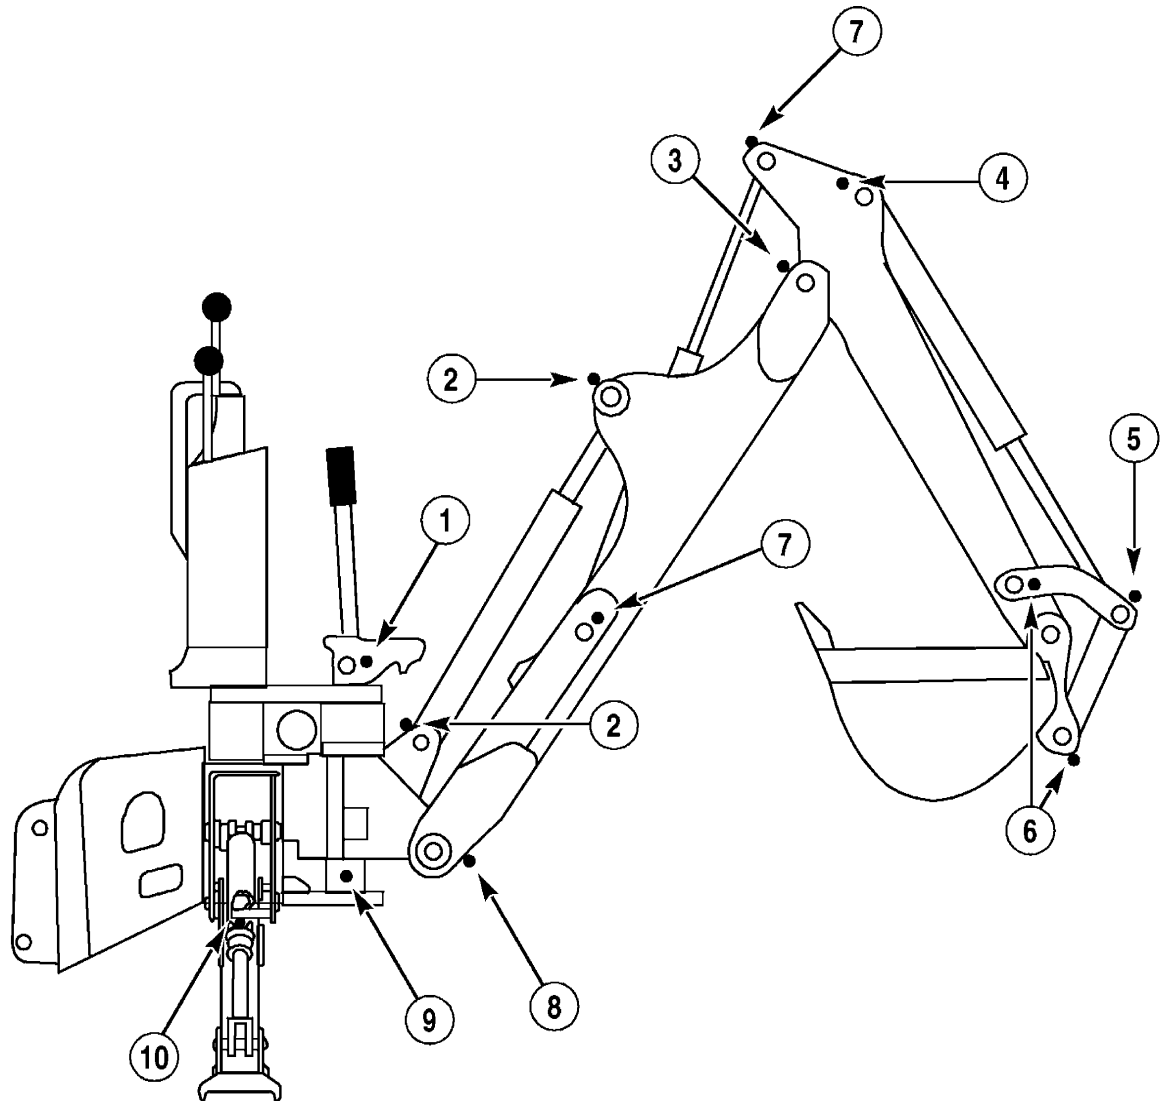

1s98h009

IF YOU OPERATE THE MACHINE IN SEVERE CONDITIONS, LUBRICATE AND SERVICE THE MACHINE MORE FREQUENTLY. IT IS RECOMMENDED THAT YOU SEE YOUR **CASE** DEALER FOR INFORMATION ON THE SYSTEMGARD LUBRICATION SYSTEM.

SEE YOUR OPERATORS MANUAL FOR MAINTENANCE OF SAFETY RELATED ITEMS AND FOR DETAILED INFORMATION OF THE SERVICE ITEMS ON THIS CHART. OPERATORS AND SERVICE MANUALS ARE AVAILABLE FOR THIS MACHINE FROM YOUR **CASE** DEALER.