



NEW HOLLAND

CRAWLER EXCAVATOR

E80B TIER 4

REPAIR MANUAL

87480998 NA

Issued 01July 08



www.newhollandconstruction.com



REPAIR MANUAL

— **E80B** —
CRAWLER EXCAVATOR
TIER 4

CNH America LLC reserves the right to make improvements in design or changes in specifications at any time without incurring any obligation to install them on units previously sold.

All data given in this publication is subject to production variations. Dimensions and weights are only approximate. Illustrations do not necessarily show products in standard condition. For exact information about any particular product, please consult your Dealer

Revision History			
Issue	Issue Date	Applicable Machine	Remarks
First Edition	Issued 07-2008	E80B	CRAWLER EXCAVATOR

Issued 07-2008

Book/Form Number 5-14940 NA

Copyright © 2008. CNH America LLC. All Rights Reserved.

Printed in U.S.A. • Bur

Source Code No. 87480998

E80B REPAIR MANUAL

TABLE OF CONTENTS

SECTION 1

SAFETY AND GENERAL INFORMATION

Section Table of Contents	1
	Book/Form Number: 5-14960 NA

CHAPTER 1

GENERAL PRECAUTIONS FOR MAKING REPAIRS

Table of Contents	1-1
	Book/Form Number: 5-14970 NA

CHAPTER 2

SPECIFICATIONS

Table of Contents	2-1
	Book/Form Number: 5-14980 NA

CHAPTER 3

ATTACHMENT DIMENSIONS

Table of Contents	3-1
	Book/Form Number: 5-14990 NA

SECTION 2

MAINTENANCE

Section Table of Contents	1
	Book/Form Number: 5-15000 NA

CHAPTER 1

TOOLS

Table of Contents	1-1
	Book/Form Number: 5-15010 NA

CHAPTER 2

STANDARD MAINTENANCE TIME TABLE

Table of Contents	2-1
	Book/Form Number: 5-15020 NA

CHAPTER 3

MAINTENANCE STANDARD AND TEST PROCEDURE

Table of Contents	3-1
	Book/Form Number: 5-15030 NA

SECTION 3

SYSTEMS

Section Table of Contents	1
	Book/Form Number: 5-15040 NA

CHAPTER 1

MECHATRO CONTROL SYSTEM

Table of Contents	1-1
	Book/Form Number: 5-15050 NA

CHAPTER 2

HYDRAULIC SYSTEM

Table of Contents	2-1
	Book/Form Number: 5-15060 NA

CHAPTER 3

ELECTRIC SYSTEM

Table of Contents	3-1
	Book/Form Number: 5-15070 NA

CHAPTER 4

COMPONENTS SYSTEM

Table of Contents	4-1
	Book/Form Number: 5-15080 NA

CHAPTER 5

AIR CONDITIONING SYSTEM

Table of Contents	5-1
	Book/Form Number: 5-15090 NA

SECTION 4

DISASSEMBLY AND ASSEMBLY

Section Table of Contents	1
	Book/Form Number: 5-15100 NA

CHAPTER 1		
ATTACHMENTS		
Table of Contents		1-1
		Book/Form Number: 5-15110 NA
CHAPTER 2		
UPPER STRUCTURE		
Table of Contents		2-1
		Book/Form Number: 5-15120 NA
CHAPTER 3		
TRAVEL SYSTEM		
Table of Contents		3-1
		Book/Form Number: 5-15130 NA
SECTION 5		
TROUBLESHOOTING		
Section Table of Contents		1
		Book/Form Number: 5-15140 NA
CHAPTER 1		
TROUBLESHOOTING BY ERROR CODES		
Table of Contents		1-1
		Book/Form Number: 5-15150 NA
CHAPTER 2		
TROUBLESHOOTING BY TROUBLE		
Table of Contents		2-1
		Book/Form Number: 5-15160 NA
SECTION 6		
ENGINE		
Section Table of Contents		1
		Book/Form Number: 5-15170 NA
CHAPTER 1		
ENGINE		
Table of Contents		1-1
		Book/Form Number: 5-15180 NA

GENERAL SAFETY INFORMATION

**WARNING**

Do not operate or perform any maintenance on this machine until all instructions found in the OPERATOR'S MANUAL and this MANUAL have been thoroughly read and understood.

Improper operation or maintenance of this machine may cause accidents and could result in serious injury or death.

Always keep the manual in storage.

If it is missing or damaged, place an order with an authorized our Distributor for a replacement.

If you have any questions, please consult an authorized our Distributor.

1. Most accidents, which occur during operation, are due to neglect of precautionary measures and safety rules. Sufficient care should be taken to avoid these accidents. Erroneous operation, lubrication or maintenance services are very dangerous and may cause injury or death of personnel. Therefore all precautionary measures, NOTES, DANGERS, WARNINGS and CAUTIONS contained in the manual and on the machine should be read and understood by all personnel before starting any work with or on the machine.
2. Operation, inspection, and maintenance should be carefully carried out, and safety must be given the first priority. Messages of safety are indicated with marks. The safety information contained in the manual is intended only to supplement safety codes, insurance requirements, local laws, rules and regulations.
3. Messages of safety appear in the manual and on the machine : All messages of safety are identified by either word of DANGER, WARNING and CAUTION.

DANGER- Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury and is represented as follows:

**DANGER**

WARNING- Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury and is represented as follows:

**WARNING**

CAUTION- Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury. It may also be used to alert against possible damage to the machine and its components and is represented as follows:

**CAUTION**

4. It is very difficult to forecast every danger that may occur during operation. However, safety can be ensured by fully understanding proper operating procedures for this machine according to methods recommended by Manufacturer.
5. While operating the machine, be sure to perform work with great care, so as not to damage the machine, or allow accidents to occur.
6. Continue studying the manual until all Safety, Operation and Maintenance procedures are completely understood by all persons working with the machine.

SAFETY PRECAUTIONS

⚠ WARNING ⚠

The proper and safe lubrication and maintenance for this machine, recommended by Manufacturer, are outlined in the OPERATOR'S MANUAL for the machine.

Improper performance of lubrication or maintenance procedures are dangerous and could result in injury or death. Read and understand the MANUAL before performing any lubrication or maintenance.

The serviceman or mechanic may be unfamiliar with many of the systems on this machine. This makes it important to use caution when performing service work. A knowledge of the system and or components is important before the removal or disassembly of any component.

Because of the size of some of the machine components, the serviceman or mechanic should check the weights noted in this manual. Use proper lifting procedures when removing any components. Weight of components table is shown in the section ; SPECIFICATIONS.

The following is a list of basic precautions that must always be observed.

1. Read and understand all Warning plates and decal on the machine before Operating, Maintaining or Repairing this machine.
2. Always wear protective glasses and protective shoes when working around machines. In particular, wear protective glasses when using hammers, punches or drifts on any part of the machine or attachments. Use welders gloves, hood/goggles, apron and the protective clothing appropriate to the welding job being performed. Do not wear loose fitting or torn clothing. Remove all rings from fingers, loose jewelry, confine long hair and loose clothing before working on this machinery.
3. Disconnect the battery and hang a **Do Not Operate** tag in the Operators Compartment. Remove ignition keys.
4. If possible, make all repairs with the machine parked on a firm level surface. Block the machine so it does not roll while working on or under the machine. Hang a **Do Not Operate** tag in the Operators Compartment.
5. Do not work on any machine that is supported only by lift, jacks or a hoist. Always use blocks or jack stands, capable of supporting the machine, before performing any disassembly.

⚠ WARNING ⚠

Do not operate this machine unless you have read and understand the instructions in the OPERATOR'S MANUAL. Improper machine operation is dangerous and could result in injury or death.

6. Relieve all pressure in air, oil or water systems before any lines, fittings or related items are disconnected or removed. Always make sure all raised components are blocked correctly and be alert for possible pressure when disconnecting any device from a system that utilizes pressure.
7. Lower the bucket, dozer, or other attachments to the ground before performing any work on the machine. If this cannot be done, make sure the bucket, dozer, ripper or other attachment is blocked correctly to prevent it from dropping unexpectedly.
8. Use steps and grab handles when mounting or dismounting a machine. Clean any mud or debris from steps, walkways or work platforms before using. Always face to the machine when using steps, ladders and walkways. When it is not possible to use the designed access system, provide ladders, scaffolds, or work platforms to perform safe repair operations.
9. To avoid back injury, use a hoist when lifting components which weigh 20kg (45lbs) or more. Make sure all chains, hooks, slings, etc., are in good condition and are the correct capacity. Be sure hooks are positioned correctly. Lifting eyes are not to be side loaded during a lifting operation.
10. To avoid burns, be alert for hot parts on machines which have just been stopped and hot fluids in lines, tubes and compartments.
11. Be careful when removing cover plates. Gradually back off the last two capscrews or nuts located at opposite ends of the cover or device and carefully pry cover loose to relieve any spring or other pressure, before removing the last two capscrews or nuts completely.
12. Be careful when removing filler caps, breathers and plugs on the machine. Hold a rag over the cap or plug to prevent being sprayed or splashed by liquids under pressure. The danger is even greater if the machine has just been stopped because fluids can be hot.

SAFETY

13. Always use the proper tools that are in good condition and that are suited for the job at hand. Be sure you understand how to use them before performing any service work.
14. Install all fasteners with the same part number. Do not use a lesser quality fastener if replacements are necessary.
15. Repairs which require welding should be performed only with the benefit of the appropriate reference information and by personnel adequately trained and knowledgeable in welding procedures. Determine type of metal being welded and select correct welding procedure and electrodes, rods or wire to provide a weld metal strength equivalent at least to that of the parent metal. Make sure to disconnect battery before any welding procedures are attempted.
16. Do not damage wiring during removal operations. Reinstall the wiring so it is not damaged nor will be damaged in operation of the machine by contacting sharp corners, or by rubbing against some object or hot surface. Do not connect wiring to a line containing fluid.
17. Be sure all protective devices including guards and shields are properly installed and functioning correctly before starting a repair. If a guard or shield must be removed to perform the repair work, use extra caution and replace the guard or shield after repair is completed.
18. The maintenance and repair work while holding the bucket raised is dangerous due to the possibility of a falling attachment. Don't fail to lower the attachment and place the bucket to the ground before starting the work.
19. Loose or damaged fuel, lubricant and hydraulic lines, tubes and hoses can cause fires. Do not bend or strike high pressure lines or install ones which have been bent or damaged. Inspect lines, tubes and hoses carefully. Do not check for leaks with your hands. Very small (pinhole) leaks can result in a high velocity oil stream that will be invisible close to the hose. This oil can penetrate the skin and cause personal injury. Use cardboard or paper to locate pinhole leaks.
20. Tighten connections to the correct torque. Make sure that all heat shields, clamps and guards are installed correctly to avoid excessive heat, vibration or rubbing against other parts during operation. Shields that protect against oil spray onto hot exhaust components in event of a line, tube or seal failure must be installed correctly.
21. Do not operate a machine if any rotating part is damaged or contacts any other part during operation. Any high speed rotating component that has been damaged or altered should be checked for balance before reusing.
22. Be careful when servicing or separating the tracks (crawlers). Chips can fly when removing or installing a track (crawlers) pin. Wear safety glasses and long sleeve protective clothing. Tracks (crawlers) can unroll very quickly when separated. Keep away from front and rear of machine. The machine can move unexpectedly when both tracks (crawlers) are disengaged from the sprockets. Block the machine to prevent it from moving.

NOTE:

This Manual is prepared as a technical material in which the information necessary for the maintenance and repairing services of our hydraulic excavators are collected, and is categorized into 6 Sections, Safety and General Information, Maintenance, System, Disassembly, Troubleshooting, and Engine.

The Section Safety and General information describes the specifications for entire machine and material, which are instructive for replacement and repairing of attachments.

The Section Maintenance describes the material, which is helpful for maintenance service and adjustments for entire machine.

The Section System describes the operating system like hydraulic system, electric system, components, and so on.

The Section Disassembly describes the removal and installing of assembly mounted on the upper structure and undercarriage, and the assembling and disassembling of the associated hydraulic equipment.

The Section Troubleshooting describes how to find the fault equipment.

The Section Engine describes the engines making use of the "Maintenance Manual" provided by the suppliers.

This Manual may be properly revised due to the improvement of products, modification of specifications, etc. And there are cases where the system on actual machine and a part of the contents of this manual may differ due to the variations of specification by countries. For the section in which the description is hardly understood, contact our distributor.

The number is assigned to every part handled in this Manual on account of the description, but the parts, which cannot be supplied as service parts are contained. Therefore, the order must be placed with respective formal number with due confirmation on the Parts Manual for applicable machine.



REPAIR MANUAL - SECTION 1

**E80B
CRAWLER EXCAVATOR
TIER 4**

SAFETY AND GENERAL INFORMATION

Issued 07-2008

Book/Form Number 5-14960 NA
Copyright © 2008. CNH America LLC. All Rights Reserved.
Printed in U.S.A. • Bur
Source Code No. 87480998

SECTION 1 - SAFETY AND GENERAL INFORMATION

CNH America LLC reserves the right to make improvements in design or changes in specifications at any time without incurring any obligation to install them on units previously sold.

All data given in this publication is subject to production variations. Dimensions and weights are only approximate. Illustrations do not necessarily show products in standard condition. For exact information about any particular product, please consult your Dealer.

Revision History				
Issue	Issue Date	Applicable Machines	Form Number	Remarks
First Edition	07-2008	E80B	5-14960	

SECTION 1

SAFETY AND GENERAL INFORMATION

SECTION TABLE OF CONTENTS

CHAPTER 1**GENERAL PRECAUTIONS FOR MAKING REPAIRS**

TABLE OF CONTENTS	1-1
GENERAL PRECAUTIONS FOR MAKING REPAIRS	1-3
INTERNATIONAL UNIT SYSTEM	1-6

CHAPTER 2**SPECIFICATIONS**

TABLE OF CONTENTS	2-1
NAME OF COMPONENTS	2-3
MACHINE DIMENSIONS	2-4
WEIGHT OF COMPONENTS	2-5
TRANSPORTATION DIMENSION AND WEIGHT	2-7
SPECIFICATIONS AND PERFORMANCE	2-10
TYPE OF CRAWLER	2-11
TYPE OF BUCKET	2-11
COMBINATIONS OF ATTACHMENT	2-12
ENGINE SPECIFICATION	2-13

CHAPTER 3**ATTACHMENT DIMENSIONS**

TABLE OF CONTENTS	3-1
ATTACHMENT DIMENSIONS	3-3
BUCKET	3-10
DOZER	3-13
SWING	3-15

NOTES

CHAPTER 1

**E80B
CRAWLER EXCAVATOR
TIER 4**

**GENERAL PRECAUTIONS FOR
MAKING REPAIRS**

Issued 07-2008

Book/Form Number 5-14970 NA

Copyright © 2008. CNH America LLC. All Rights Reserved.

Printed in U.S.A. • Bur

Source Code No. 87480998

SECTION 1 - SAFETY AND GENERAL INFORMATION
CHAPTER 1 - GENERAL PRECAUTIONS FOR MAKING REPAIRS

CNH America LLC reserves the right to make improvements in design or changes in specifications at any time without incurring any obligation to install them on units previously sold.

All data given in this publication is subject to production variations. Dimensions and weights are only approximate. Illustrations do not necessarily show products in standard condition. For exact information about any particular product, please consult your Dealer.

Revision History				
Issue	Issue Date	Applicable Machines	Form Number	Remarks
First Edition	07-2008	E80B	5-14970	

CHAPTER 1

GENERAL PRECAUTIONS FOR MAKING REPAIRS

TABLE OF CONTENTS

GENERAL PRECAUTIONS FOR MAKING REPAIRS	1-3
Preparation Before Disassembling	1-3
Safety When Disassembling And Assembling	1-3
Disassembling and Assembling Hydraulic Equipment	1-3
Removing Hydraulic Equipment Assembly	1-3
Disassembling Hydraulic Equipment	1-3
Inspecting Parts	1-4
Assembling Hydraulic Equipment	1-4
Installing Hydraulic Equipment	1-4
Electrical Equipment	1-4
Hydraulic Parts	1-5
Weld Repair	1-5
Environmental Issues	1-5
INTERNATIONAL UNIT SYSTEM	1-6
Introduction	1-6

NOTES

GENERAL PRECAUTIONS FOR MAKING REPAIRS

PREPARATION BEFORE DISASSEMBLING

1. Knowledge of operating procedure
Read Operator's Manual carefully to understand the operating procedure.
2. Cleaning machines
Clean machines of soil, mud, and dust before carrying into the service shop.
Carrying a soiled machine into the service shop, causes making less efficient work and damage of parts.
3. Inspecting machines
Confirm the disassembling section before starting work, determine the disassembly procedure taking the conditions in work shop into account, and request to procure necessary parts in advance.
4. Recording
Record the following items to keep contact and prevent malfunction from recurring.
 - A. Inspecting date, place
 - B. Model name, Serial number and Record on hour meter
 - C. Trouble condition, place, cause
 - D. Visible oil leak, water leak and damage
 - E. Clogging of filters, oil level, oil quality, oil contamination and looseness.
 - F. Examine the problems on the basis of monthly operation rate with the last inspection date and records on hour meter.
5. Arrangement and cleaning in service shop
 - A. Tools required for repair work.
 - B. Prepare the places to put the disassembled parts.
 - C. Prepare oil pans for leaking oil, etc.

SAFETY WHEN DISASSEMBLING AND ASSEMBLING

Safety

1. Wear appropriate clothing, safety shoes, safety helmet, goggles, and clothes with long sleeves.
2. Attach "Don't operate" tag to control lever, and begin a meeting before starting the work.
3. Before starting inspection and maintenance stop the engine.
4. Confirm the position of first-aid kit and fire extinguisher, and also where to make contact for emergency measure and ambulance to prepare for accidents and fire.

5. Choose a hard, lever and safe place, and put attachment on the ground without fail.
6. Use hoist, etc. to remove parts of heavy weight (23kg [50 lb] or more).
7. Use proper tools, and change or repair defective tools.
8. Machine and attachment required to work in the lifting condition should be supported with supports or blocks securely.

DISASSEMBLING AND ASSEMBLING HYDRAULIC EQUIPMENT

Removing Hydraulic Equipment Assembly

1. Before removing pipes, release the pressure of hydraulic oil tank, or open the cover on the return side to tank, and take out the filter.
2. Drain the oil in the removed pipes into pan to prevent the oil from spilling on the ground.
3. Pipes with plugs or caps to prevent oil leaking, entry of dust, etc.
4. Clean the outside surface of equipment, etc. before disassembling, and drain hydraulic oil and gear oil before putting them on working bench.

Disassembling Hydraulic Equipment

1. Since performance and function of hydraulic equipment after disassembly and assembly results in immunity from responsibility on the manufacturer's side, disassembly, assembly and modification without permission are strictly prohibited.
2. If it is unavoidably necessary to disassemble and modify, it should be carried out by experts or personnel qualified through service training.
3. Make match mark on parts for reassembling.
4. Before disassembling, read Disassembling Instruction in advance, and determine if the disassembly and assembly are permitted or not.
5. For parts which are required to use jig and tools, don't fail to use the specified jig and tools.
6. For parts which can not be removed in the specified procedure, never force removal. First check for the cause.
7. The removed parts should be put in order and tagged so as to install on proper places without confusion.
8. For common parts, pay attention to the quantity and places.

SECTION 1 - SAFETY AND GENERAL INFORMATION
CHAPTER 1 - GENERAL PRECAUTIONS FOR MAKING REPAIRS

Inspecting Parts

1. Check that the disassembled parts are free from adherence, interference and uneven working face.
2. Measure the wear of parts and clearance, and record the measured values.
3. If an abnormality is detected, repair or replace the parts.

Assembling Hydraulic Equipment

1. During the parts cleaning, ventilate the room.
2. Before assembly, clean parts roughly first, and then completely.
3. Remove adhering oil by compressed air, and apply hydraulic oil or gear oil, and then assemble them.
4. Replace the removed O-ring, back-up rings and oil seal with new ones, and apply grease oil on them before assembling.
5. Removes dirt and water on the surface on which liquid sealant are applied, decrease them, and apply liquid sealant on them.
6. Before assembling, remove rust preventives on new parts.
7. Use special tools to fit bearings, bushing and oil seal.
8. Assemble parts matching to the marks.
9. After completion, check that there is no omission of parts.

Installing Hydraulic Equipment

1. Confirm hydraulic oil and lubrication oil.
2. Air release is required in the following cases ;
 - A. Change of hydraulic oil
 - B. Replacement of parts on suction pipe side
 - C. Removing and attaching hydraulic pump
 - D. Removing and attaching swing motor
 - E. Removing and attaching travel motor
 - F. Removing and attaching hydraulic cylinder

WARNING: If hydraulic oil and lubricating oil are not filled and also air bleed is not performed, the hydraulic equipment may be damaged.

3. For air bleed of hydraulic pump and swing motor, loosen drain plug on the upper part, start engine, and run in low idling, then bleed air until hydraulic oil is comes out. After completion of comes, tighten plug securely.

4. For air bleed of travel motor and hydraulic cylinder, starts engine and operate it for 10 minutes or more at no-load and low speed.


NOTE: For cylinder, don't move it to the stroke end at beginning.

5. Air in pilot circuit can be bleed out by only operating digging, swing and traveling motions thoroughly.

6. Check hydraulic oil level.

Move attachments to hydraulic oil check position, and check hydraulic oil level of tank. Refill oil if the oil level is lower than the specified level.

How to check oil level of hydraulic oil tank

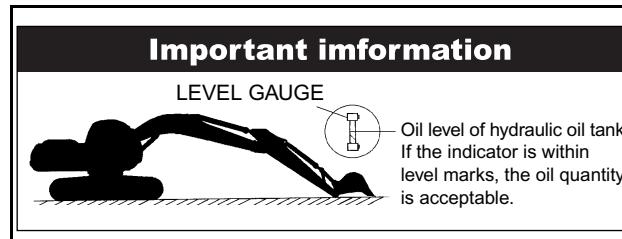

GRAPHIC_ID

Figure 1

ELECTRICAL EQUIPMENT

1. The disassembly of electrical equipment is not allowed.
2. Handle equipment with care so as not to drop it or bump it.
3. Connector should be removed by unlocking while holding the connector.
Never stress in tension to the caulked section by pulling wire.
4. Check that connector is connected and locked completely.
5. Engine key off before removing and connecting connector.
6. Engine key off before touching terminals of starter and alternator.
7. Remove battery grounding terminal before beginning work close to battery and battery relay with tools.
8. Wash machine with care so as not to splash water on electrical equipment and connector.
9. When water has entered in the waterproofed connector, the removing of water is not easy. So check the removed waterproofed connector with care to protect it from entry of water. If moisture adheres on it, dry it completely before connecting.

Thanks very much for your reading,

Want to get more information,

**Please click here, Then get the complete
manual**

Just **ClickHere** 

NOTE:

**If there is no response to click on the link above,
please download the PDF document first, and then
click on it.**

**Have any questions please write to me:
admin@servicemanualperfect.com**